

PROJECT:

DISTRIBUTOR:

DRAWN BY:

DATE:

CATALOGUE #:

CONTRACTOR:

TYPE:

PO:



STANPRO

SPEC SHEET

FEATURES AND SPECIFICATIONS

STANDARD FEATURES

- 98% Efficient Typical
- PWM/IGBT Technology and Micro-Controller
- Internal Maintenance Bypass
- User Programmable with Password Protection
- Automatic Event, Test and Alarm Log
- RS232 Communications Port
- Input Circuit Breaker
- 2ms Transfer Time
- Low Audible Noise
- Space-Saving Design
- 65kAIC Withstanding Rating

OPTIONAL FEATURES

- Enhanced Communications
 - Expanded Building Management Protocols
 - BACnet or Modbus Communications Interface
 - IoT Connect Cloud Software
- External Maintenance Bypass
- Summary Alarm Dry Form C Contacts
- Internal Output Distribution Circuit Breakers
- Normally Off Output
- Output Trip Alarms
- Remote Panels (Meter, Status or Summary Alarm)

SPECIFICATIONS

- Input Voltage: 120/208, 277/480, 347/600 VAC 3-Phase 4 Wire Wye Configuration
- Output Voltage: 120/208, 277/480, 347/600 VAC 3-Phase Wye or Delta Configuration
- Output Load Power Factor .5 Lag to .5 Lead
- Compatible with all lighting including LED Drivers
- Forced Air Cooling Only During Emergency Operation; No Filters Required
- Output Distortion Less than 3% THD for Linear Loads
- Compatible with Generators
- 30, 60, 90 and 120 Minute available
- Inverter Operating Temperature 0°C to 40°C
- Battery Operating Temperature 20°C to 30°C

APPROVALS

- cUL to CSA 22.2 #141-15

System Display Functions

ADVANCED TECHNOLOGY

Designed with advanced Pure Sine Wave technology, the SNQ provides direct AC power and full illumination to all lighting sources. With industry-leading efficiencies, they run cool and reduce the overall operating costs of emergency lighting systems.

INDUSTRY LEADING COMPACT FOOTPRINT

Designed with industry leading compact footprint, the SNQ allows building owners to comply with emergency lighting codes without sacrificing valuable floor-space. Featuring a NEMA Type 1 space-saving design these inverters fit easily into electrical rooms where floor space is limited!

INVERTER.CONNECT

Inverter Connect is a cloud-based platform that allows users to monitor and receive alerts about their emergency lighting inverter systems. IoT Inverter Connect streamlines system communications and sends users notifications on their computers, tablets or smartphone devices. The web-based platform allows any device that connects to the internet to log in to the system.

Enhances Building Safety

- Proactively monitors & notifies of critical issues that could affect building safety.
- Proactive maintenance solidifies confidence that the lights will illuminate during an emergency.

Saves Time

- User-friendly design makes it easy to find the most crucial information quickly.
- Easy-to-use dashboard enables a status check of a fleet of inverters from anywhere.

Connectivity

- Receive status and alarm notifications by SMS and/or email.
- See the results of your inverters' periodic self-tests. View detailed real-time inverter telemetry.
- Accessible from any device connected to the internet.

Future-Ready Design

- Software is adaptable to meet the demands of future technological advances.

ORDERING GUIDE

Series	Voltage Input-Output	Capacity Rating (W)*	Battery Type	Output Breakers ¹				Options
				Output	Voltage/Poles	Amp Rating	Quantity ²	
SNQ30 SNQ60 SNQ90 SNQ120	AB-Ab - 120/208 Input; 120/208 Output EK-EK - 277/480 Input; 277/480 Output HS-HS - 347/600 Input; 347/600 Output	5 000 7 500 10 000 12 500 16 700 25 000 33 200 37 500 50 000	S - Standard	O - Normally On F - Normally Off	A - 120V 1-Pole B - 208V 2-Poles C - 240V 2-Poles E - 277V 1-Pole AB - 120/208V 3-Poles AK - 277/480V 3-Poles H - 347V K - 480V 2-Poles	10 16 20 25 32 40 50 63	T01 - T30	STANDARD FEATURES C - Status Monitoring Contacts Dry Form C DT - Drip Top (NEMA 2) OPTIONAL FEATURES BCF - Battery Cabinet Fan BTM - Battery Temperature Monitor F - Fast Charge I - Inverter On Dry Form C Contacts L - Load Control Interface (Dimmer / Switch Bypass) ³ O - Output Transfer Delay P - Remote Status Panel (Requires Option C) R - Remote Meter Panel RA - Remote Summary Alarm Panel S - Summary Dry Form C Contacts SM - Seismic Bracing/Mounting ⁴ PICK 1 BIP - BACnet IP IOT - IoT Inverter Cloud Connect MIP - Modbus TCP/IP

¹ Output breakers are optional.² Maximum out breakers available: 5 000-10 000W: 19 supervised poles

12 500-16 700W: 27 supervised poles

25 000-50 000W: 30 supervised poles

Combinations of 1, 2 and/or 3 pole breakers available (consult factory)

347V: 14 supervised

³ Contact factory.⁴ Anchorage based on calculations. For systems requiring OSHPD/Withstand testing, please contact the factory.


* Capacity changes with runtime. See list below.

Capacity Rating as per Ordering Guide	Actual Capacity Rating (kW)			
	SNQ30	SNQ60	SNQ90	SNQ120
5 000	5	5	4.38	3.75
7 500	7.5	7.5	6.56	5.63
10 000	10	10	8.75	7.5
12 500	12.5	12.5	10.9	9.38
16 700	16.7	16.7	14.6	12.5
25 000	25	25	21.9	18.8
33 200	33.2	33.2	29.1	24.9
37 500	37.5	37.5	32.8	28.1
50 000	50	50	43.8	37.5

OPTION TABLE

Option Code	Option Name	Description
BBM	Internal Maintenance Bypass (Break-Before-Make)	Toggle switch designed to disconnect inverter from electrical system for maintenance (Break Before Make)
BCF	Battery Cabinet Fan	Fan in battery cabinets activated whenever system goes to emergency
BIP	BACnet IP	"MSTP" allow upload of FMP data via RS232 intermediate device. This info can then be downloaded to customer device. Allows direct communication via IP
BL	Output Circuit Breaker Lock(s)	Allows customer to lock the output circuit breaker in on or off position
BTM	Battery Temperature Monitor	1. Warning alarm: warns when battery temperature is getting too high. 2. Absolute alarm: when temperature reaches high temp this shuts down the string of batteries where the hot battery is.
C	Status Monitoring Contacts	5 form C dry contacts: 1. System in Bypass 2. Summary Alarm: any alarm in the FMP 3. Output trip alarm 4. Utility failure 5. Inverter on
DT	Drip Top (NEMA 2)	Metal piece designed to direct falling water away from the unit
EMBP	External Maintenance Bypass (Make-Before-Break)	Maintenance bypass switch mounted external to the system. Cannot use with output circuit breakers
F	Fast Charge	Allows the system to recharge in 12 hours from LVD
I	Inverter on Dry Form C Contact	Form C dry contact which opens when inverter is on
IOT	IOT inverter Connect Cloud communication	System using the Cloud to allow monitoring of multiple systems in one location
L	Load Control Relay (Line Voltage Dimmer or Switch Bypass)	Load Control Relay (Line Voltage Dimmer or Switch Bypass)
MIP	Modbus TCP/IP	"MSTP" allow upload of FMP data via RS232 intermediate device. This info can then be downloaded to customer device. Allows direct communication via IP
O	Output Transfer Delay	Device designed to delay transfer adjustable 0-7.5 seconds, factory set at 3 seconds. Used when control system cannot detect the fast transfer.
P	Remote Status Panel (Status alarms, Requires C Option)	Single gang box showing status of alarms, requires C option
R	Remote Meter Panel	Full size meter panel mounted remotely in a NEMA1 enclosure
RA	Remote Summary Alarm Panel	LED indicator and Sound alert
S	Summary Fault Form C contacts	Relay contact showing any alarm
SM	Seismic Mounting	Instructions and hardware for mounting system in standard seismic applications
T	Output Trip Alarm	Alarms when any output circuit breaker is tripped

DIMENSIONS

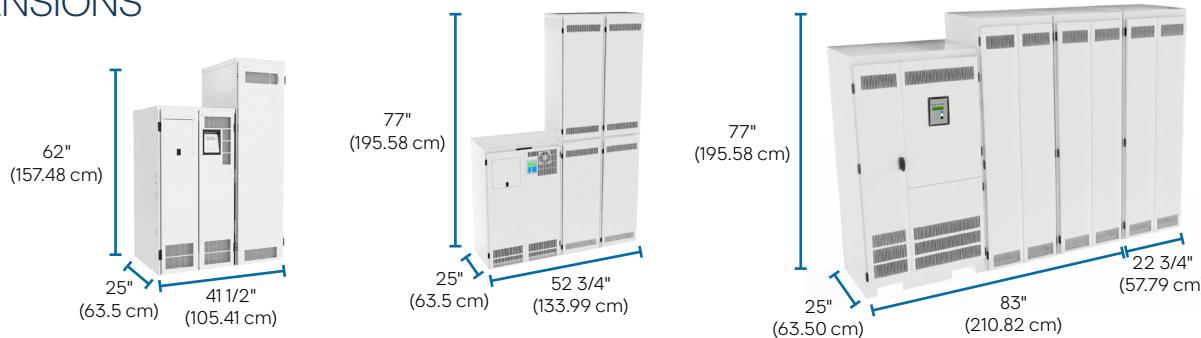

Power Rating (kW)	Voltage IN-OUT (VAC)	Electronics Cabinet Dimensions				Batteries		Electronics Cabinet Dimensions				Total System Weight	
		30 min.	Width (in)	Height (in)	Depth (in)	Weight (lbs)	No. of Batteries	Weight (lbs)	Width (in)	Height (in)	Depth (in)	Weight (lbs)	
5	120/208 or 277/480 347/600		24	47 69	25	485 675	12	860	17.5	62	25	285	1 630 1 820
7.5	120/208 or 277/480 347/600		24	47 69	25	485 675	12	860	17.5	62	25	285	1 630 1 820
10	120/208 or 277/480 347/600		24	47 69	25	590 802	12	860	17.5	62	25	285	1 735 1 947
12.5	120/208 or 277/480 347/600		30	47 69	25	640 746	15	1 076	22.75	77	25	375	2 091 2 197
16.7	120/208 or 277/480 347/600		30	47 69	25	640 746	20	1 434	22.75	77	25	375	2 449 2 555
25	120/208 or 277/480 347/600		37.5 67.5	72	25	1 150 1 285	40	2 868	45.5	77	25	750	4 768 4 903
33.2	120/208 or 277/480 347/600		37.5 67.5	72	25	1 150 1 302	40	2 868	45.5	77	25	750	4 768 4 920
37.5	120/208 or 277/480 347/600		37.5 67.5	72	25	1 360 1 531	60	4 302	68.25	77	25	1 125	6 787 6 958
50	120/208 or 277/480 347/600		37.5 67.5	72	25	1 360 1 550	60	4 302	68.25	77	25	1 125	6 787 6 977

Power Rating (kW)			Voltage IN-OUT (VAC)	Electronics Cabinet Dimensions				Batteries		Electronics Cabinet Dimensions				Total System Weight
60 min.	90 min.	120 min.		Width (in)	Height (in)	Depth (in)	Weight (lbs)	No. of Batteries	Weight (lbs)	Width (in)	Height (in)	Depth (in)	Weight (lbs)	
5	4.38	3.75	120/208 or 277/480 347/600	24	47 69	25	485 675	12	860	17.5	62	25	285	1 630 1 820
7.5	6.56	5.63	120/208 or 277/480 347/600	24	47 69	25	485 675	12	1 190	17.5	62	25	285	1 960 2 150
10	8.75	7.5	120/208 or 277/480 347/600	24	47 69	25	590 802	12	1 428	17.5	62	25	285	2 303 2 515
12.5	10.9	9.38	120/208 or 277/480 347/600	30	47 69	25	640 746	15	1 785	22.75	77	25	375	2 800 2 906
16.7	14.6	12.5	120/208 or 277/480 347/600	30	47 69	25	640 746	20	2 380	22.75	77	25	375	3 395 3 501
25	21.9	18.8	120/208 or 277/480 347/600	37.5 67.5	72	25	1 150 1 285	40	3 968	45.5	77	25	750	5 868 6 003
33.2	29.1	24.9	120/208 or 277/480 347/600	37.5 67.5	72	25	1 150 1 302	40	4 760	45.5	77	25	750	6 660 6 812
37.5	32.8	28.1	120/208 or 277/480 347/600	37.5 67.5	72	25	1 360 1 531	60	5 952	68.25	77	25	1 125	8 437 8 608
50	43.8	37.5	120/208 or 277/480 347/600	37.5 67.5	72	25	1 360 1 550	60	7 140	68.25	77	25	1 125	9 625 9 815

HEAT LOSS TABLE

30 Minute Run Time		60 Minute Run Time		90 Minute Run Time		120 Minute Run Time	
Output Rating (kW)	Heat Loss (BTU/h)	Output Rating (kW)	Heat Loss (BTU/h)	Output Rating (kW)	Heat Loss (BTU/h)	Output Rating (kW)	Heat Loss (BTU/h)
5.00	341	5.00	341	4.38	298	3.75	256
7.50	512	7.50	512	6.56	448	5.63	384
10.0	682	10.0	682	8.75	597	7.50	512
12.5	853	12.5	853	10.9	746	9.38	639
16.7	1139	16.7	1139	14.6	997	12.5	854
25.0	1705	25.0	1705	21.9	1492	18.8	1279
33.2	2 264	33.2	2 264	29.1	1 981	24.9	1 698
37.5	2 558	37.5	2 558	32.8	2 238	28.1	1 918
50.0	3 410	50.0	3 410	43.8	2 984	37.5	2 558