




T8 U-BENT TYPE A Ballast Compatible Tube LED Fluorescent Replacement

Ballast compatible fluorescent U-Bent replacement lamps offer a quick and economical solution without any additional wiring needed. Quality glass encasing ensures protection against tube yellowing and brittleness. Compatible with a variety of electronic instant start, rapid start and program start ballasts.

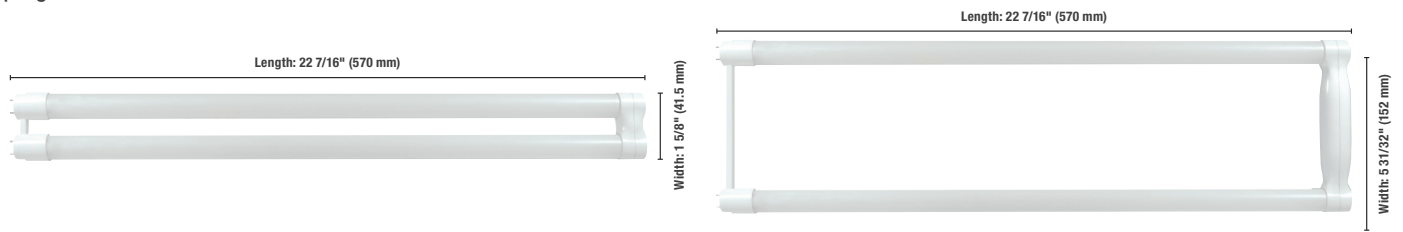

U-Bent U1

U-Bent U6

Order code	Description	System watts (W)			Base	Color temp. (K)	CRI	Life L70 (hrs)	Lumen output (lm)			Case qty (master)
		LBF ¹	NBF ¹	HBF ¹					LBF ¹	NBF ¹	HBF ¹	
U-Bent												
66985	T8/S2/15W/840/48/U1/ND/STD	16	18	24	G13	4 000	82	50 000	1 980	2 200	2 840	12
66986	T8/S2/11.5W/835/48/U6/ND/STD	13	14	20	G13	3 500	82	50 000	1 570	1 750	2 270	12
66987	T8/S2/11.5W/840/48/U6/ND/STD	13	14	20	G13	4 000	82	50 000	1 620	1 800	2 330	12
66988	T8/S2/15W/840/48/U6/ND/STD	16	18	24	G13	4 000	82	50 000	1 980	2 200	2 840	12

Lumen values are derived from photometric testing
 For a complete list of compatible ballasts and DLC qualified products, please visit www.standardpro.com
 This lamp only operates on existing ballast in 120-277/347V application
¹ LBF= Low ballast factor, NBF= Normal ballast factor, HBF= High ballast factor

