Project : _____   Type : _____

Drawn by : _____   Catalogue # : _____   Date : _____

Series Spec Sheet

LED TAPE KIT

EASY DIY

Stanpro's low voltage LED TAPE KITS are designed to enhance any space with a dramatic statement of color. Add ambiance and character to any setting.

It provides a great brightness either for color changing RGB version or cool and warm white colors and with its ease of installation, it can be used in a multitude of applications both indoor and outdoor!

View our full collection of LED strip tapes and extrusion offerings in our brochure.

3 yrs
warranty

IP 64

UL CERTIFIED

FEATURES AND SPECIFICATIONS

• Construction

Physical Characteristics
– Reel length 16.4' (5m)
– 12 V
– 9 LED/ft, 30 LED/m, 150 LED/reel
– Included in the kit:
  • 1 Tape light
  • 1 plug-in driver
  • 1 RGB remote control (for RGB kit only)
  • 2 End caps

Mounting
– 3M Adhesive backing for an easy installation to smooth surfaces
– Variety of fixing accessories: RGB connector, connector and mounting clips
– No soldering required with our variety of connectors and accessories available
– Additional driver can be ordered seperately

• Performance data
– DC, Constant voltage
– Estimated lifespan of 30 000 hours to L70
– Can be installed outside
– Cannot be directly exposed to water or weather

Color temperatures available:
RGB
– Total reel wattage 27 W
– Dimming is only available using the "Brightness +/-" option on the remote control.
Warm white (3 000 K) and Cool white (5 000 K)
– Total reel wattage 27 W

OVERVIEW

Light source	LED
Watts (W)	1.7
Lumen output (lm)	1 980
Efficacy (lm/W)	55
Color temperature (K)	RGB, 3 000, 5 000

Page 1/3
LV LED TAPE KIT • Rév. 2025-3-1

2233 rue de l'Aviation, Dorval, QC H9P 2X6
📞 514.342.1199, 1.800.361.6965 • 🖶 514.807.3011 • www.standardpro.com   STANPRO

QUICK SHIP AND TECHNICAL SPECIFICATION TABLE 🕐

TAPE KITS

Order code	Model number	Watts (W)		Volts (V DC)	Color temp. (K)[1]	Lumen output (lm)[2]		Life L70 (hrs)[3]	Dimming capability (Yes/No)	Number of LED chips		Master case qty
		(per ft.)	(per m.)			(per ft.)	(per m.)			(per ft.)	(per m.)	

REEL 16.4' (5 m)

Order code	Model number	(per ft.)	(per m.)	Volts	Color temp.	(per ft.)	(per m.)	Life L70	Dimming	(per ft.)	(per m.)	Master
61953	LED/TAPE/16.4'/5050/RGB KIT/12V/50M/STD	1.6	5.4	12	RGB	-	-	30 000	Yes	9	30	20
61954	LED/TAPE/16.4'/5050/WW KIT/12V/50M/STD	1.7	5.6	12	3 000	123	396	30 000	No	9	30	20
61955	LED/TAPE/16.4'/5050/CW KIT/12V/50M/STD	1.7	5.6	12	5 000	123	396	30 000	No	9	30	20

[1] Typical color temperature range: +/- 5 %.
[2] Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.
[3] Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

INCLUDED IN THE BOX

1 RGB remote control (for RGB kit only)


1 Plug-in driver

2 End caps

1 Tape light 16.4' (5m)

LED DRIVERS (additional drivers can be ordered seperately)

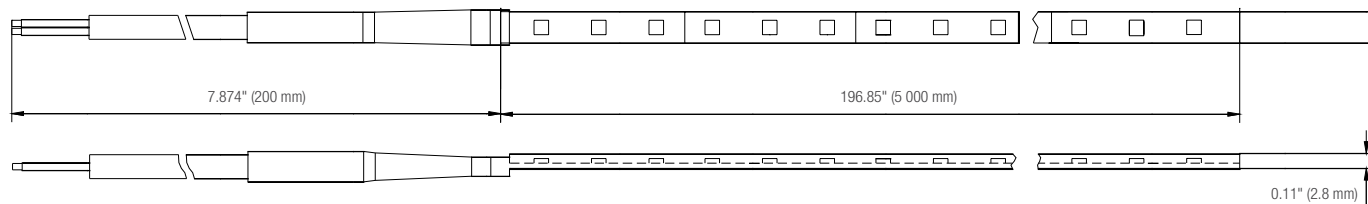| Order code	Model number	Type	Output power (W)	Output volts (V DC)	Length (per ft.)	(per m.)	Master case qty
Plug-in - Non-Dimmable							
62265	LED/TAPE/36W/12V/WW+CW/PS/ND/STD	Low Voltage	36	12	6.56	2	50
62266	LED/TAPE/36W/12V/RGB/PS/ND/STD	Low Voltage	36	12	6.56	2	50

ACCESSORIES (order seperately)

Order code	Description	Type	Figure refer to pics	Quantity per pack	Case qty (master)
61956	LED/TAPE/RGB/CONNECTOR/STD	RGB Connector	A	10	50
61957	LED/TAPE/WW+CW/CONNECTOR/STD	Connector	B	10	100
62017	LED/10PCS TAPE LIGHT MOUNTING CLIPS	Mounting clips	C	10	100

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
All products are subject to change or may be discontinued any time without notice.

Page 2/3
LV LED TAPE KIT • Rév. 2025-3-1

2233 rue de l'Aviation, Dorval, QC H9P 2X6
📞 514.342.1199, 1.800.361.6965 • 🖨 514.807.3011 • www.standardpro.com STANPRO

DIMENSIONS

7.874" (200 mm)

196.85" (5 000 mm)

0.11" (2.8 mm)

61953

4.06" (100 mm)

1.31" (33.3 mm)

0.394" (10.0 mm)

61954 - 61955

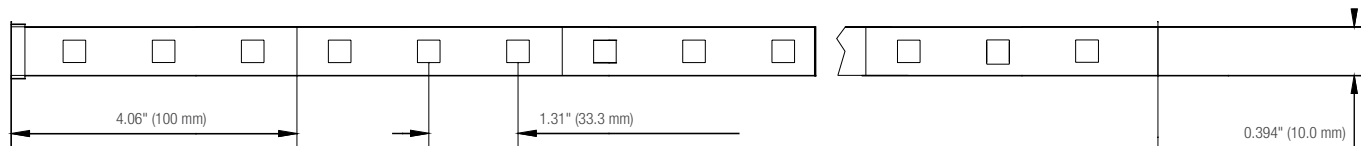2.03" (51.51 mm)

1.31" (33.3 mm)

0.394" (10.0 mm)

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
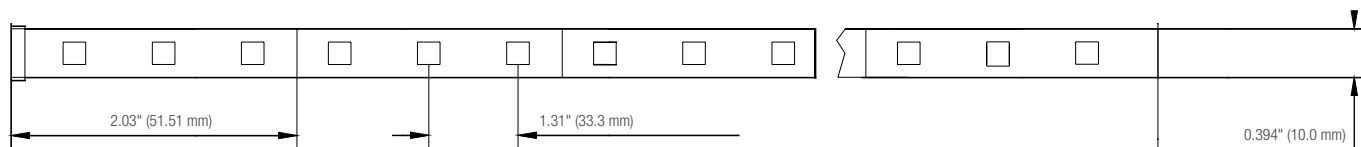All products are subject to change or may be discontinued any time without notice.