


TRACK SYSTEMS



STANPRO

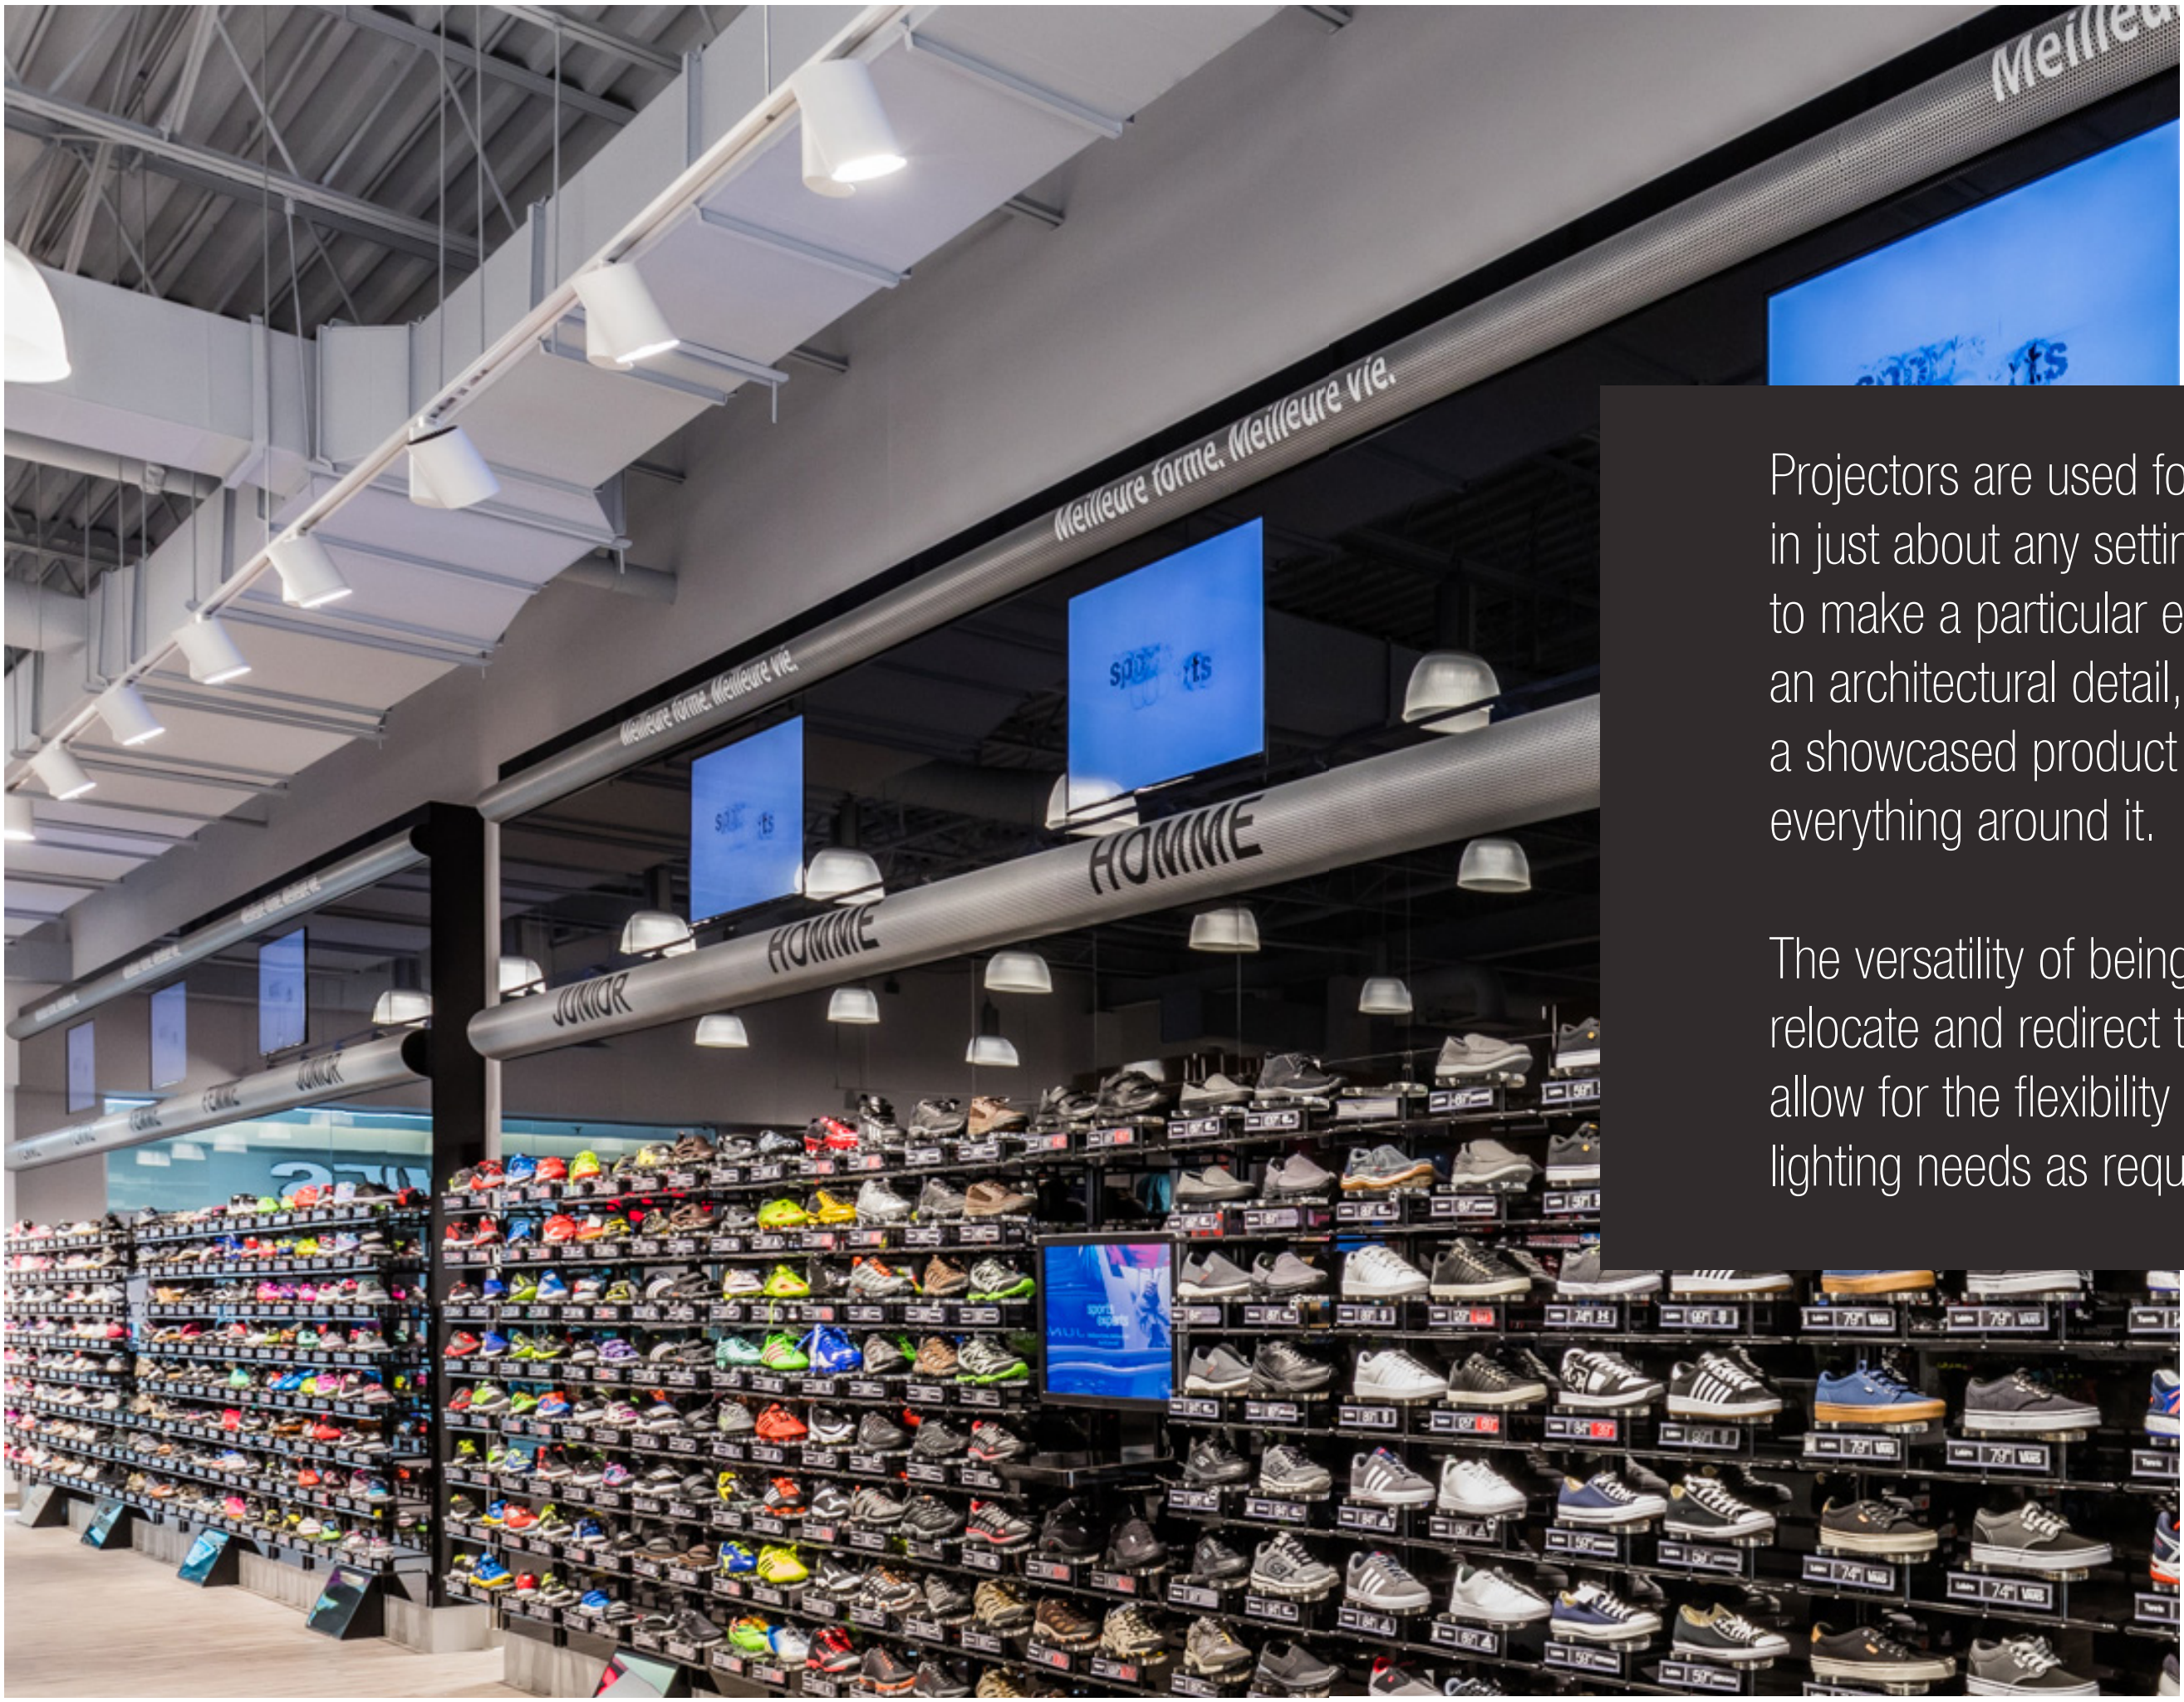

Projectors are used for accent lighting in just about any setting. Its purpose is to make a particular element, such as an architectural detail, a work of art or a showcased product stand out from everything around it.

The versatility of being able to remove, relocate and redirect these luminaires, allow for the flexibility to adjust your lighting needs as required.


TL & TLL SERIES

LED TRACK HEADS






TL22




9 W
(920 lm - 1 008 lm)
Spot 16°, Narrow Flood 20°, Flood 35°

13 W
(1 343 lm - 1 544 lm)
Spot 20°, Narrow Flood 23°, Flood 36°

TL94





20 W
(1 961 lm - 2 160 lm)
Spot 20°, Narrow Flood 30°, Flood 38°




30 W
(2 868 lm - 3 683 lm)
Spot 21°, Narrow Flood 31°, Flood 38°


TL96

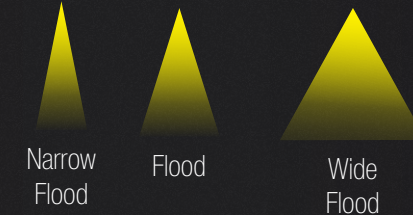

42 W
(4 507 lm - 4 567 lm)
Narrow Flood 22°, Flood 44°, Wide Flood 58°



TLL

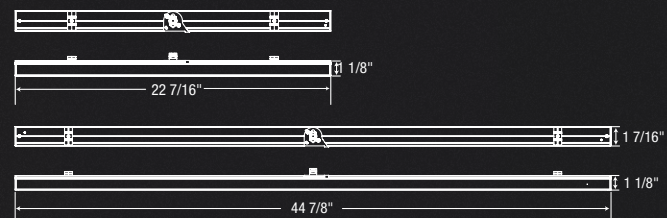

18 W
(1 612 lm - 1 702 lm)
Diffused Beam 110°

36 W
(3 246 lm - 3 440 lm)
Diffused Beam 110°

FOR ALL TL

FIXTURE COLORS



COLOR TEMPERATURES



FEATURES


- Die cast aluminum housing with integrated heat sink and driver
- Voltage: 120 V
- 80+ and 90+ CRI
- Compatible with "J" track ("H" track adaptor upon request)
- Luminous efficacy: over 100 lm/W for all wattages and color temperatures

FOR ALL TLL

FIXTURE COLORS



COLOR TEMPERATURES



FEATURES

- Aluminum housing with integrated driver
- Voltage: 120 V
- 80+ CRI
- Compatible with "J" track



5 yrs
warranty



LED
fixture



ICES
005

Ideal for accent and display lighting applications, the TL22 series features die cast aluminum construction with integrated heat sink in a sleek design. Available in multiple color temperature options and beam distributions, these luminaires are perfect for those applications where simplicity and high performance are required.

TL22 SERIES

TL22 LED TRACK HEAD



Housing Die cast aluminum housing with integrated heat sink. Heavy duty scratch resistant powder coated.	LED Color consistency (SDCM) is 3 step MacAdam ellipse.	9 W and 13 W, 120 V Line voltage LE + TE Dimmable.	with "H" adapter are classified to be used Cooper Lighting L641/2/3 track series.
Optics/Lens Standard lens that allows for desired beam angles. Lens constructed with plastic material.	Lumens & Efficacy 9 W: 863 lm - 972 lm 13 W: 1 320 lm - 1 499 lm 9 W: 3 000 K, 863 lm - 93 lm/W 13 W: 3 000 K, 1 371 lm - 100 lm/W	Adapter Track heads with "J" adapter are classified to be used with Stanpro STJ track series, Juno T or TU track series. Easily switch the track head to two-circuit by pulling up contact. See instruction sheet for details. Track heads	
Beams 9 W: Spot 16°, Narrow Flood 20°, Flood 35° 13 W: Spot 20°, Narrow Flood 23°, Flood 36°	Driver		

ORDERING GUIDE

TL22					A		
Series	Lumen package (lm)	Color temp. (K)	CRI	Beam distribution ¹	Volts (V)	Adaptor	Fixture color ²
TL22	09 - 863-972 14 - 1 320-1 499	30 - 3 000 35 - 3 500 40 - 4 000	80 - 80+ 90 - 90+	S - Spot N - Narrow flood F - Flood	A - 120	J - J & J2 track (standard) H - H & H2 Track ¹	BK - Black WH - White


¹ Refer to Beam distribution chart for more details.
² For other options and availabilities please contact factory.

TECHNICAL SPECIFICATION TABLE


Lumen package	Watts (W)	3 000 K		3 500 K		4 000 K	
		Lumen (lm)	Efficiency (lm/W)	Lumen (lm)	Efficiency (lm/W)	Lumen (lm)	Efficiency (lm/W)
09	9 W	863 lm	93 lm	888 lm	97 lm	944 lm	102 lm
14	13 W	1 371 lm	100 lm	1 411 lm	105 lm	1 499 lm	113 lm

Note: All lumen information is based on Narrow flood beam reflector and 80+ CRI.

BEAM DISTRIBUTION CHART

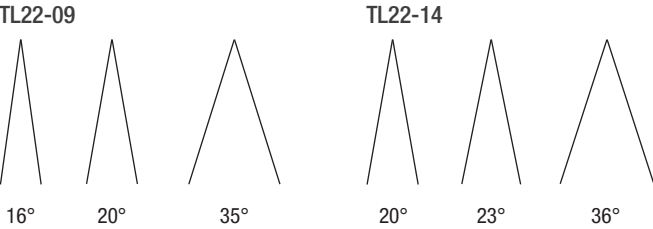

DIMENSIONS

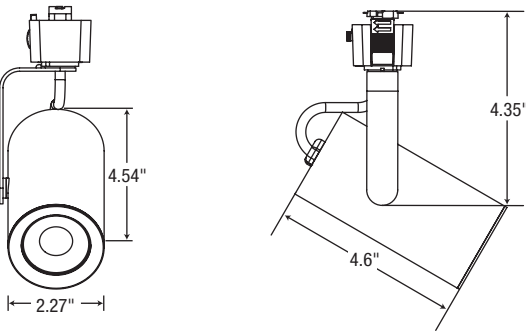

COMPATIBLE DIMMERS

Brand	Leading edge model number		Brand	Trailing edge model number	
Lutron	SLV-600X S2-LX GL-600H	NFTU-5A DVLV-600P	Lutron	NTELV-600-XX SELV-303P MAELV-600-XX	DVELV-300P-XX SEIV-300P-XX
Leviton	6602-X 6681-X 6683-X 6684-X 700-X	705-X 6633 6674 IPI06-1LZ	Leviton	IPE04-1LZ VZE06-1LX 6615-POT	
Cooper	9530XXX		Philips	SR400RPC120	

The fixture dimmer compatibility table shown above is for dimming functionality only. The dimmers listed in this chart may not comply to ICES 005 class A or B standards. To confirm ICES 005 compliance please contact the dimmer manufacturer.

TM21 TABLE • TL22 - (9W)

Time (t) at which to estimate lumen maintenance (hours)	50 000
Lumen maintenance at time (t) (%)	94.88%
Calculated L70 (hours)	693 500
Reported L70 (hours)	60 000

Note: Lumens are based on 30K color temperature.

TM21 TABLE • TL22 - (13W)

Time (t) at which to estimate lumen maintenance (hours)	50 000
Lumen maintenance at time (t) (%)	93.07%
Calculated L70 (hours)	299 700
Reported L70 (hours)	>61 000

Note: Lumens are based on 30K color temperature.



5 yrs
warranty

LED
fixture

ICES
005

Highly versatile adjustable side-mounted luminaire. Featuring die-cast housing with an integrated heat sink, our TL94 series is ideal for applications that demand outstanding performance at no compromise to energy efficiency.

TL94 SERIES

TL94 LED TRACK HEAD



- **Construction**

Housing
Heavy duty die cast aluminum housing and integrated heat sink.

Finishes
Heavy duty scratch resistant powder coated.

Optics/ Reflectors
Reflector made of plastic material.

Beams
20 W: Spot 20°, Narrow Flood 30°, Flood 38°.
- 30 W: Spot 21°, Narrow Flood 31°, Flood 38°.

LED
Color consistency (SDCM) is 3 step McAdam ellipse.

Lumens & Efficacy
20 W: 1 961 lm - 2 267 lm
30 W: 2 655 lm - 2 825 lm
20 W: 3 000 K, 2 045 lm - 106 lm/W
30 W: 3 000 K, 2 689 lm - 98 lm/W
- Driver**
20 W and 30 W, 120 V Line voltage LE + TE Dimmable.

Adapter
Track heads with “J” adapter comes standard for single or two circuit to be used with Stanpro STJ track series, Juno T or TU track series and Prescolite TS or TT track series. Track heads with “H” adapter are classified to be used with Stanpro STH track series and Cooper Lighting L641/2/3 track series.

ORDERING GUIDE

TL94				A			
Series	Lumen package	Color temp. (K)	CRI	Beam distribution ¹	Volts (V)	Adaptor	Fixture color ²
TL94	20 - 1 961 - 2 267 30 - 2 655 - 2 825	30 - 3 000 35 - 3 500 40 - 4 000	80 - 80+ 90 - 90+	S - Spot N - Narrow flood F - Flood	A - 120	J - J & J2 track (standard) H - H & H2 Track ¹	BK - Black WH - White


¹ Refer to Beam distribution chart for more details.
² For other options and availabilities please contact factory.

LUMEN CHART TABLE


Lumen package	Watts (W)	3 000 K		3 500 K		4 000 K	
		Lumen (lm)	Efficiency (lm/W)	Lumen (lm)	Efficiency (lm/W)	Lumen (lm)	Efficiency (lm/W)
20	20 W	2 045 lm	106 lm/W	2 113 lm	110 lm/W	2 267 lm	117 lm/W
30	30 W	2 689 lm	98 lm/W	2 732 lm	96 lm/W	2 784 lm	109 lm/W

Note: All lumen information is based on Narrow flood beam reflector and 80+ CRI.

BEAM DISTRIBUTION CHART

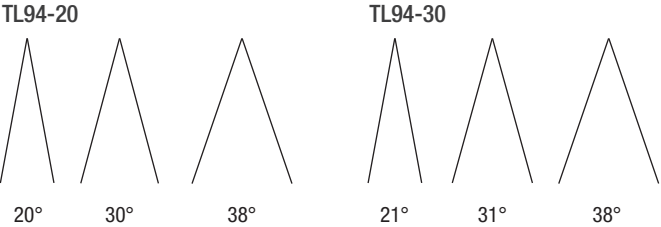

DIMENSIONS

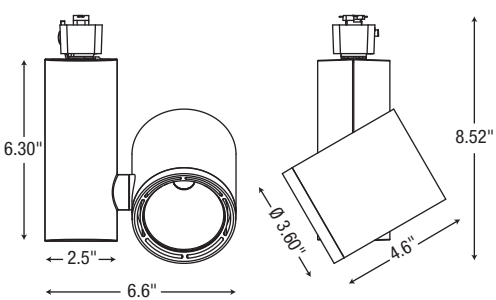

COMPATIBLE DIMMERS

Brand	Leading edge model number	
Lutron	DV-600P	CTCL-153P
	DVLV-600P	GL-600H
	SELV-300P	S-600P
	NFTU-5A	SR150LED
Philips	SR150LED	

Brand	Trailing edge model number
Lutron	DVELV-303P
	NTELV-600
	MAELV-600

The fixture dimmer compatibility table shown beside is for dimming functionality only. The dimmers listed in this chart may not comply to ICES 005 class A or B standards. To confirm ICES 005 compliance please contact the dimmer manufacturer.

TM21 TABLE • TL94 - (20W)

Time (t) at which to estimate lumen maintenance (hours)	10 080
Lumen maintenance at time (t) (%)	71.17%
Calculated L70 (hours)	133 000
Reported L70 (hours)	>60 500

Note: Lumens are based on 30K color temperature.

TM21 TABLE • TL94 - (30W)

Time (t) at which to estimate lumen maintenance (hours)	11 088
Lumen maintenance at time (t) (%)	71.17%
Calculated L70 (hours)	182 000
Reported L70 (hours)	>61 000

Note: Lumens are based on 30K color temperature.



5 yrs
warranty

LED
fixture

ICES
005

Clean lines and aesthetic design fit easily into all applications and become part of the design concept. TL96 series offers excellent beam control while providing high performance accent lighting for retail and commercial applications.

TL96 SERIES

TL96 LED TRACK HEAD



- Housing**
Heavy duty die cast aluminum housing and integrated heat sink.

Finishes
Heavy duty scratch resistant powder coated.

Optics/ Reflectors
Reflector made of plastic material.

Beams
Narrow Flood 22°, Flood 44°, Wide Flood 58°
- Lumens**
3 800 lm - 4 042 lm
41 W: 3 000 K, 92.3 lm/W

Driver
41 W, 120V Line voltage LE + TE Dimmable.

Adapter
Track heads with “J” adapter comes standard for single or two circuit to be used with Stanpro STJ track series, Juno T or
- TU track series and Prescolite TS or TT track series. Track heads with “H” adapter are classified to be used with Stanpro STH track series and Cooper Lighting L641/2/3 track series.

ORDERING GUIDE

TL96	40				A		
Series	Lumen package	Color temp. (K)	CRI	Beam distribution ¹	Volts (V)	Adaptor	Fixture color ²
TL96	40 - 3 800 - 4 042	30 - 3 000 35 - 3 500 40 - 4 000	80 - 80+ 90 - 90+	N - Narrow flood F - Flood W - Wide flood	A - 120	J - J & J2 track (standard) H - H & H2 Track ¹	BK - Black WH - White


¹ Refer to Beam distribution chart for more details.
² For other options and availabilities please contact factory.

LUMEN CHART TABLE

Lumen package	Watts (W)	3 000 K		3 500 K		4 000 K	
		Lumen (lm)	Efficiency (lm/W)	Lumen (lm)	Efficiency (lm/W)	Lumen (lm)	Efficiency (lm/W)
40	41 W	3 756	92.3	3 808	93.9	3 872	94.6

Note: All lumen information is based on Narrow flood beam reflector and 80+ CRI.

BEAM DISTRIBUTION CHART

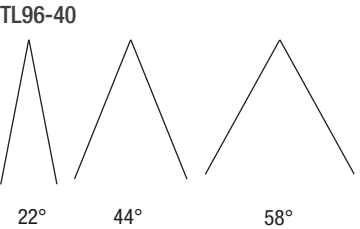


COMPATIBLE DIMMERS

Brand	Model number	
Lutron	S-603PG	S-600P
	DVELV-303P	SELV-300P
	CT-130P	TG-600P
	DVCL-153P	LG-600P
	DV-600P	MAELV-600
	TGCL-153P	FAELV-500
Leviton	IPI06-1LZ	6161
	6631-2	6633-P
	VPE06	IPE04
	6683-IW	
Lightolier	ZP260QEW	
Cooper	DAL06P	
	DLC03P	
	SLC03P	

The fixture dimmer compatibility table shown beside is for dimming functionality only. The dimmers listed in this chart may not comply to ICES 005 class A or B standards. To confirm ICES 005 compliance please contact the dimmer manufacturer.

DIMENSIONS

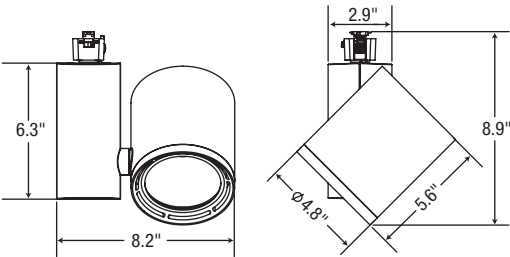

TM21 TABLE • TL96

Time (t) at which to estimate lumen maintenance (hours)	50 000
Lumen maintenance at time (t) (%)	95.01%
Calculated L70 (hours)	451 000
Reported L70 (hours)	>33 000

Note: Lumens are based on 30K color temperature.

5 yrs
warranty



LED
fixture



ICES
005

The TLL is a newly developed linear LED track mounted luminaire. It provides highly efficient illumination and it comes with J & J2 style track adaptor. The TLL can be used to add general lighting along with regular track heads. Its slim housing allows it to be installed in restricted areas such as coves and also display application. Available in 2 foot and 4 foot comes with a diffused lens.

TLL SERIES

TLL LED TRACK LINEAR LIGHTING



Housing Extruded aluminum lightweight LED linear track	Efficacy 18W: 3000K, 89.6 lm/W 36W: 3000K, 90.2 lm/W
Finished Heavy duty scratch resistant powder coated. Available in textured white and black.	Adapter Track linear with "J" adapter are classified to be used with Stanpro STJ track series, Juno T or TU track series and Prescolite TS or TT track series.
Optics Comes standard with a polycarbonate frosted lens.	
Lumens 1 612 lm - 3 440 lm	

QUICK SHIP ORDERING GUIDE WITH FROSTED LENS DIFFUSED ⌚¹

Part number	Watts (W)	Volts (VAC)	Color temp. (K) [*]	Lumen (lm) [*]	Efficiency (lm/W)	Lens finish	CRI	Life L70 (hrs) [*]	Finish	Power factor	THD (%)	Case qty (master)
2'												
TLL2-183080DU-AJWH	18	120	3 000	1 612	90	Frosted lens diffused	80+	50 000	White	>0.9	<20	20
TLL2-183580DU-AJWH	18	120	3 500	1 612	90	Frosted lens diffused	80+	50 000	White	>0.9	<20	20
TLL2-184080DU-AJBK	18	120	4 000	1 708	95	Frosted lens diffused	80+	50 000	Black	>0.9	<20	20
TLL2-184080DU-AJWH	18	120	4 000	1 708	95	Frosted lens diffused	80+	50 000	White	>0.9	<20	20
4'												
TLL4-363080DU-AJWH	36	120	3 000	3 246	90	Frosted lens diffused	80+	50 000	White	>0.9	<20	20
TLL4-363580DU-AJBK	36	120	3 500	3 246	90	Frosted lens diffused	80+	50 000	Black	>0.9	<20	20
TLL4-363580DU-AJWH	36	120	3 500	3 246	90	Frosted lens diffused	80+	50 000	White	>0.9	<20	20
TLL4-364080DU-AJWH	36	120	4 000	3 440	96	Frosted lens diffused	80+	50 000	White	>0.9	<20	20

¹ **QUICK SHIP:** Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.
^{*} Typical color temperature range: +/- 5 %.
^{*} Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.
^{*} Life hours are derived from IESNA LM-80-08 testing report and projected per IESNA TM-21-11 extrapolations.

LUMEN CHART


Lumen package	Watts (W)	3 000 K		3 500 K		4 000 K	
		Lumen (lm)	Efficiency (lm/W)	Lumen (lm)	Efficiency (lm/W)	Lumen (lm)	Efficiency (lm/W)
18	18	1 612	89.6	1 612	89.6	1 708	94.9
36	36	3 246	90.2	3 246	90.2	3 440	95.6

TM21 TABLE – TLL (20W and 36W)


Time (t) at which to estimate lumen maintenance (hours)	50 000
Lumen maintenance at time (t) (%)	83.12%
Calculated L70 (hours)	95 240
Reported L70 (hours)	36 000

DIMENSIONS

2'



4'

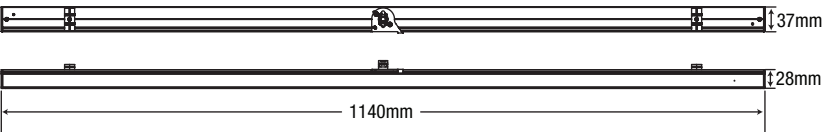



5
yrs
warranty

LED
fixture

ICES
005

TWL02 SERIES

The Stanpro single or double LED wall washer is made of an extruded aluminum housing which provides durability, clean lines and optimal thermal dissipation. The TWL02S (30W) and TWL02D (50W) come complete with J & J2 style track adaptor. H & H2 style adaptor available upon request. Suitable for ceiling-mounted tracks.

TWL02S/TWL02D

LED WALL WASHER

30 W OR 50 W

Housing
Extruded aluminum lightweight LED linear track

Material
Die-cast aluminum driver housing.

Aiming
Precision aiming adjustment with a pivot that allows for rotations up to 350° vertically in both directions. Each side of the double fixture can be independently adjusted for more flexibility.

LED
Single
30 W LED: 3 000 K (2 580 lm) (4 000 K upon request)
Double
50: 50 W LED : 3 000 K (4 737 lm) (4 000 K upon request)
Estimated lifespan of over 54 000 hours to L70.


Drivers
Integral electronic driver, dimmable with standard dimmers.

Finishes
Heavy duty scratch resistant powder coated. Available in textured white and black (glossy silver upon request).

Lens and Louvers
The fixture comes with frosted lens in

polycarbonate. Optional louvers available as accessories.

Adapter
Track heads with "J" adapter are classified to be used with Stanpro STJ track series, Juno T or TU track series and Prescolite TS or TT track series. Track heads with "H" adapter are classified to be used with Stanpro STH track series and Cooper Lighting L641/2/3 track series.

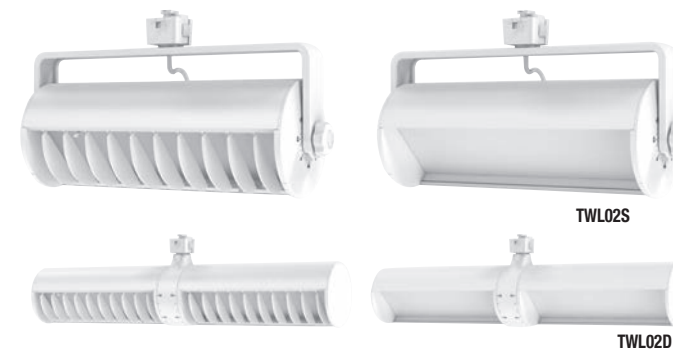

ORDERING GUIDE

Series	Watts (W)	Color temp. (K)	Volts (V)	Adapter	Finish ¹
TWL02S	30 -30	30K - 3 000 40K - 4 000 ²	A 120	J - J & J2 Track H - H & H2 track ¹	BK - Black WH - White
TWL02D	50 -50				


¹ Please contact factory for availability.

² For other options and availabilities please contact factory.

ACCESSORIES (order separately)

Part number	Type
LEN325-WH	Louver
LEN325-BK	Louver

DIMENSIONS

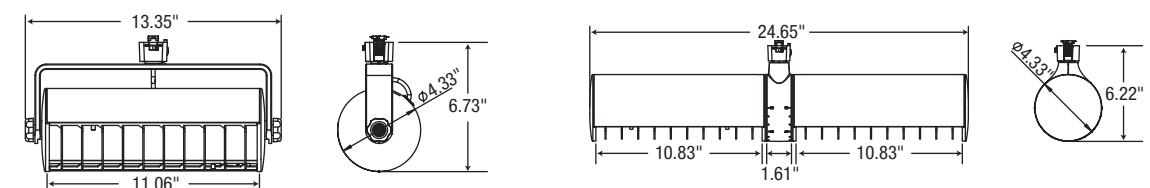

TG & TL SERIES

COMMODITY TRACK HEADS



1^{yr}
warranty

quick
ship

Front loaded economical PAR38 Gimbal style track head. Integral on/off switch and track polarity indicator come standard. The TG05N comes complete with J & J2 style track adaptor. H & H2 style adaptor available upon request.

TG05N SERIES



TG05N PAR38 – FRONT LOAD 250W MAX.

SPECIFICATIONS

Material
Heavy duty housing designed for commercial use.

Aiming
The secure yoke provides precision aiming without the need for tools.

Lamps
Incandescent or LED (**lamp not included**)
Max 250W-E26 medium base PAR38 style lamps.

Finishes
Heavy duty scratch resistant powder coated. Available in glossy white, black and silver.

Accessories
Line voltage extensions (12", 18", 24", 36") are available. Please refer to the "tracks and accessories" pages for ordering guide.

Adaptor
Track heads with "J" adaptor are classified to be used with Stanpro STJ track series, Juno T or TU track series and Prescolite TS or TT track series. Track heads with "H" adaptor are classified to be used with Stanpro STH track series and Cooper Lighting L641/2/3 track series.

ORDERING GUIDE

TG05N	N	0250	A		
Series	Lamp type	Watts (W)	Volts (V)	Adaptor	Fixture color
TG05N	N - Incandescent	250 - 250 max	A - 120	J - J & J2 track (standard) H ² - H & H2 Track	BK - Black WH - White SI ² - Silver

¹ **QUICK SHIP:** Not all products are Quick Ship. To view our Quick Ship qualified products, please consult our Quick Ship Product Guide at stanprols.com/quick-ship-product-guide. Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.


² Available on request, please contact factory.

COMPATIBLE LAMPS SUGGESTED *Traditional look with an LED lamp!*

Order code	Description	Watts (W)	Base	Volts (VAC)	Color temp. (K)	CRI	Life L70 (hrs)	Lumen output (lm)	Beam angle (°)	CBCP (cd)	Traditional equivalent (W)	Case qty (inner/master)
PAR38												
67613	P38/15W/30K/45/DESIGN/STD	15	E26	120	3 000	80	25 000	1 200	45	1 150	100	1/10
67614	P38/15W/40K/45/DESIGN/STD	15	E26	120	4 000	80	25 000	1 200	45	1 500	100	1/10
66297	P38/16.5W/27K/25/CHOICE/STD	16.5	E26	120	2 700	≥90	15 000	1 360	25	6 067	100	1/6
66298	P38/16.5W/27K/40/CHOICE/STD	16.5	E26	120	2 700	≥90	15 000	1 398	40	2 527	100	1/6
69226	P38/S2/13W/30K/25/CHOICE/STD	13	E26	120	3 000	≥90	25 000	1 450	25	6 067	100	1/6
69227	P38/S2/13W/30K/40/CHOICE/STD	13	E26	120	3 000	≥90	25 000	1 450	40	2 527	100	1/6
69228	P38/S2/13W/40K/25/CHOICE/STD	13	E26	120	4 000	≥90	25 000	1 490	25	6 067	100	1/6
66302	P38/16.5W/40K/40/CHOICE/STD	16.5	E26	120	4 000	≥90	15 000	1 510	40	2 527	100	1/6
67914	P38HO/27W/30K/25/120-277/STD	27	E26	120-277	3 000	-	25 000	3 000	25	-	250	1/6



DIMENSIONS



1^{yr}
warranty

quick
ship

Front loaded economical PAR30 Gimbal style track head. Integral on/off switch and track polarity indicator come standard. The TG07N comes complete with J & J2 style track adaptor. H & H2 style adaptor available upon request.

TG07N SERIES



TG07N PAR30S – FRONT LOAD 75W MAX.

SPECIFICATIONS

Material
Heavy duty housing designed for commercial use.

Aiming
The secure yoke provides precision aiming without the need for tools.

Lamps
Incandescent or LED (**lamp not included**)
Max 75W-E26 medium base PAR30S style lamps.

Finishes
Heavy duty scratch resistant powder coated. Available in glossy white, black and silver.

Accessories
Line voltage extensions (12", 18", 24", 36") are available. Please refer to the “tracks and accessories” pages for ordering guide.

Adaptor
Track heads with “J” adaptor are classified to be used with Stanpro STJ track series, Juno T or TU track series and Prescolite TS or TT track series. Track heads with “H” adaptor are classified to be used with Stanpro STH track series and Cooper Lighting L641/2/3 track series.

ORDERING GUIDE

TG07N	N	0075	A		
Series	Lamp type	Watts (W)	Volts (V)	Adaptor	Fixture color
TG07N	N - Incandescent	0075 - 75 max	A - 120	J - J & J2 track (standard) H ² - H & H2 Track	BK - Black WH - White SI ² - Silver

¹ **QUICK SHIP:** Not all products are Quick Ship. To view our Quick Ship qualified products, please consult our Quick Ship Product Guide at stanprols.com/quick-ship-product-guide. Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.


² Available on request, please contact factory.

COMPATIBLE LAMPS SUGGESTED *Traditional look with an LED lamp!*

Order code	Description	Watts (W)	Base	Volts (VAC)	Color temp. (K)	CRI	Life L70 (hrs)	Lumen output (lm)	Beam angle (°)	CBCP (cd)	Traditional equivalent (W)	Case qty (inner/master)
PAR30SN												
67609	P30S/10W/30K/45/DESIGN/STD	10	E26	120	3 000	80	25 000	750	45	810	60	1/20
67610	P30S/10W/40K/45/DESIGN/STD	10	E26	120	4 000	80	25 000	750	45	810	60	1/20
69218	P30S/S2/8W/27K/25/CHOICE/STD	8	E26	120	2 700	≥90	25 000	887	25	3 843	75	1/6
66292	P30S/12W/27K/40/CHOICE/STD	12	E26	120	2 700	≥90	15 000	929	40	1 740	75	1/6
69220	P30S/S2/8W/30K/25/CHOICE/STD	8	E26	120	3 000	≥90	25 000	935	25	3 843	75	1/6
69221	P30S/S2/8W/30K/40/CHOICE/STD	8	E26	120	3 000	≥90	25 000	935	40	1 740	75	1/6
66295	P30S/12W/40K/25/CHOICE/STD	12	E26	120	4 000	≥90	15 000	1 006	25	3 843	75	1/6
69223	P30S/S2/8W/40K/40/CHOICE/STD	8	E26	120	4 000	≥90	25 000	985	40	1 740	75	1/6



DIMENSIONS



1^{yr}
warranty

quick
ship

Front loaded economical PAR20 Gimbal style track head. Integral on/off switch and track polarity indicator come standard. The TG08N comes complete with J & J2 style track adaptor. H & H2 style adaptor available upon request.

TG08N SERIES

TG08N PAR20 – FRONT LOAD 50W MAX.

SPECIFICATIONS

Material
Heavy duty housing designed for commercial use.

Aiming
The secure yoke provides precision aiming without the need for tools.

Lamps
Incandescent or LED (**lamp not included**)
Max 50W-E26 medium base PAR20 style lamps.

Finishes
Heavy duty scratch resistant powder coated. Available in glossy white, black and silver .

Accessories
Line voltage extensions (12", 18", 24", 36") are available. Please refer to the "tracks and accessories" pages for ordering guide.

Adaptor
Track heads with "J" adaptor are classified to be used with Stanpro STJ track series, Juno T or TU track series and Prescolite TS or TT track series. Track heads with "H" adaptor are classified to be used with Stanpro STH track series and Cooper Lighting L641/2/3 track series.

ORDERING GUIDE

TG08N	N	0050	A		
Series	Lamp type	Watts (W)	Volts (V)	Adaptor	Fixture color
TG08N	N - Incandescent	0050 - 50 max	A - 120	J - J & J2 track (standard) H ² - H & H2 Track	BK - Black WH - White SI - Silver

¹ **QUICK SHIP:** Not all products are Quick Ship. To view our Quick Ship qualified products, please consult our Quick Ship Product Guide at stanprols.com/quick-ship-product-guide. Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.


² Available on request, please contact factory.

COMPATIBLE LAMPS SUGGESTED *Traditional look with an LED lamp!*

Order code	Description	Watts (W)	Base	Volts (VAC)	Color temp. (K)	CRI	Life L70 (hrs)	Lumen output (lm)	Beam angle (°)	CBCP (cd)	Traditional equivalent (W)	Case qty (inner/master)
PAR20												
67609	P20/7W/30K/45/DESIGN/STD	7	E26	120	2 700	80	25 000	500	45	520	50	10/60
67608	P20/7W/40K/45/DESIGN/STD	7	E26	120	3 000	80	25 000	500	45	520	50	10/60
69206	P20/S2/6.5W/27K/25/CHOICE/STD	6.5	E26	120	2 700	≥90	25 000	514	25	1 708	50	1/12
69207	P20/S2/6.5W/27K/40/CHOICE/STD	6.5	E26	120	2 700	≥90	25 000	514	40	914	50	1/12
69208	P20/S2/6.5W/30K/25/CHOICE/STD	6.5	E26	120	3 000	≥90	25 000	554	25	1 708	50	1/12
69209	P20/S2/6.5W/30K/40/CHOICE/STD	6.5	E26	120	3 000	≥90	25 000	554	40	914	50	1/12
66283	P20/8W/40K/25/CHOICE/STD	8	E26	120	4 000	≥90	15 000	616	25	1 708	50	1/12
69211	P20/S2/6.5W/40K/40/CHOICE/STD	6.5	E26	120	4 000	≥90	25 000	575	40	914	50	1/12




DIMENSIONS





1_{yr}
warranty


quick
ship

The economical adjustable socket style track head allows for the proper seating of various lamps. Integral on/off switch and track polarity indicator come standard. The TL10 comes complete with J & J2 style track adaptor. H & H2 style adaptor available upon request.


TL10 SERIES

TL10 ADJUSTABLE SOCKET 250W MAX.

SPECIFICATIONS

- Material**
Heavy duty housing designed for commercial use.
- Aiming**
The secure yoke provides precision aiming without the need for tools.
- Lamps**
Incandescent or LED (**lamp not included**)
E26 medium base style lamps:
Max 75W PAR16
Max 50W PAR20
Max 75W PAR30LN
Max 250W PAR38

- Finishes**
Heavy duty scratch resistant powder coated. Available in glossy white, black and silver.
- Adaptor**
Track heads with “J” adaptor are classified to be used with Stanpro STJ track series, Juno T or TU track series and Prescolite TS or TT track series. Track heads with “H” adaptor are classified to be used with Stanpro STH track series and Cooper Lighting L641/2/3 track series.



ORDERING GUIDE

TL10	N	0250	A		
Series	Lamp type	Watts (W)	Volts (V)	Adaptor	Fixture color
TL10	N - Incandescent	0250 - 250 max	A - 120	J - J & J2 track (standard) H ² - H & H2 Track	BK - Black WH - White SI ² - Silver

¹ **QUICK SHIP:** Not all products are Quick Ship. To view our Quick Ship qualified products, please consult our Quick Ship Product Guide at stanprols.com/quick-ship-product-guide. Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

² Available on request, please contact factory.

COMPATIBLE LAMPS SUGGESTED *Traditional look with an LED lamp!*

Order code	Description	Watts (W)	Base (VAC)	Volts (V)	Color temp. (K)	CRI	Life L70 (hrs)	Lumen output (lm)	Beam angle (°)	CBCP (cd)	Traditional equivalent (W)	Case qty (inner/master)
PAR20												
67607	P20/7W/30K/45/DESIGN/STD	7	E26	120	2 700	80	25 000	500	45	520	50	10/60
67608	P20/7W/40K/45/DESIGN/STD	7	E26	120	3 000	80	25 000	500	45	520	50	10/60
69206	P20/S2/6.5W/27K/25/CHOICE/STD	6.5	E26	120	2 700	≥90	25 000	514	25	1 708	50	1/12
69207	P20/S2/6.5W/27K/40/CHOICE/STD	6.5	E26	120	2 700	≥90	25 000	514	40	914	50	1/12
69208	P20/S2/6.5W/30K/25/CHOICE/STD	6.5	E26	120	3 000	≥90	25 000	554	25	1 708	50	1/12
69209	P20/S2/6.5W/30K/40/CHOICE/STD	6.5	E26	120	3 000	≥90	25 000	554	40	914	50	1/12
66283	P20/8W/40K/25/CHOICE/STD	8	E26	120	4 000	≥90	15 000	616	25	1 708	50	1/12
69211	P20/S2/6.5W/40K/40/CHOICE/STD	6.5	E26	120	4 000	≥90	25 000	575	40	914	50	1/12
PAR30LN												
67611	P30L/13W/30K/45/DESIGN/STD	13	E26	120	3 000	80	25 000	950	45	1 100	75	1/20
67612	P30L/13W/40K/45/DESIGN/STD	13	E26	120	4 000	80	25 000	950	45	1 150	75	1/20
66285	P30L/12W/27K/25/CHOICE/STD	12	E26	120	2 700	≥90	15 000	942	25	4 178	75	1/6
66286	P30L/12W/27K/40/CHOICE/STD	12	E26	120	2 700	≥90	15 000	935	40	1 813	75	1/6
69214	P30L/S2/8W/30K/25/CHOICE/STD	8	E26	120	3 000	≥90	15 000	901	25	4 178	75	1/6
69215	P30L/S2/8W/30K/40/CHOICE/STD	8	E26	120	3 000	≥90	25 000	901	40	1 813	75	1/6
66289	P30L/12W/40K/25/CHOICE/STD	12	E26	120	4 000	≥90	15 000	1 024	25	4 178	75	1/6
69217	P30L/S2/8W/40K/40/CHOICE/STD	8	E26	120	4 000	≥90	25 000	999	40	1 813	75	1/6
PAR38												
67613	P38/15W/30K/45/DESIGN/STD	15	E26	120	3 000	80	25 000	1 200	45	1 150	100	1/10
67614	P38/15W/40K/45/DESIGN/STD	15	E26	120	4 000	80	25 000	1 200	45	1 500	100	1/10
66297	P38/16.5W/27K/25/CHOICE/STD	16.5	E26	120	2 700	≥90	15 000	1 360	25	6 067	100	1/6
66298	P38/16.5W/27K/40/CHOICE/STD	16.5	E26	120	2 700	≥90	15 000	1 398	40	2 527	100	1/6
69226	P38/S2/13W/30K/25/CHOICE/STD	13	E26	120	3 000	≥90	25 000	1 450	25	6 067	100	1/6
69227	P38/S2/13W/30K/40/CHOICE/STD	13	E26	120	3 000	≥90	25 000	1 450	40	2 527	100	1/6
69228	P38/S2/13W/40K/25/CHOICE/STD	13	E26	120	4 000	≥90	25 000	1 490	25	6 067	100	1/6
66302	P38/16.5W/40K/40/CHOICE/STD	16.5	E26	120	4 000	≥90	15 000	1 510	40	2 527	100	1/6
67914	P38H0/27W/30K/25/120-277/STD	27	E26	120-277	3 000	-	25 000	3 000	25	-	250	1/6



1^{yr}
warranty

quick
ship

The economical adjustable side swivel track head allows for the proper seating of various lamps including PAR30 long neck. It features a half yoke design with slide adjustment slot to maximize the fixture height options. Integral on/off switch and track polarity indicator come standard. The TL95 comes complete with J & J2 style track adaptor. H & H2 style adaptor available upon request.

TL95 SERIES




TL95 MINI ADJUSTABLE SIDE SWIVEL 250W MAX.

SPECIFICATIONS

- Material**
Heavy duty housing designed for commercial use.
- Aiming**
The secure yoke provides precision aiming without the need for tools.
- Lamps**
Incandescent or LED (**lamp not included**)
E26 medium base style lamps:
Max 75W PAR16
Max 50W PAR20
Max 75W PAR30
Max 250W PAR38

- Finishes**
Heavy duty scratch resistant powder coated. Available in glossy white, black and silver.
- Adaptor**
Track heads with “J” adaptor are classified to be used with Stanpro STJ track series, Juno T or TU track series and Prescolite TS or TT track series. Track heads with “H” adaptor are classified to be used with Stanpro STH track series and Cooper Lighting L641/2/3 track series.



ORDERING GUIDE

TL95	N	0250	A		
Series	Lamp type	Watts (W)	Volts (V)	Adaptor	Fixture color
TL95	N - Incandescent	0250 - 250 max	A - 120	J - J & J2 track (standard) H ² - H & H2 Track	BK - Black WH - White SI ² - Silver


¹ **QUICK SHIP:** Not all products are Quick Ship. To view our Quick Ship qualified products, please consult our Quick Ship Product Guide at stanprols.com/quick-ship-product-guide. Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

² Available on request, please contact factory.

COMPATIBLE LAMPS SUGGESTED *Traditional look with an LED lamp!*

Order code	Description	Watts (W)	Base	Volts (VAC)	Color temp. (K)	CRI	Life L70 (hrs)	Lumen output (lm)	Beam angle (°)	CBCP (cd)	Traditional equivalent (W)	Case qty (inner/master)
PAR20												
67607	P20/7W/30K/45/DESIGN/STD	7	E26	120	2 700	80	25 000	500	45	520	50	10/60
67608	P20/7W/40K/45/DESIGN/STD	7	E26	120	3 000	80	25 000	500	45	520	50	10/60
69206	P20/S2/6.5W/27K/25/CHOICE/STD	6.5	E26	120	2 700	≥90	25 000	514	25	1 708	50	1/12
69207	P20/S2/6.5W/27K/40/CHOICE/STD	6.5	E26	120	2 700	≥90	25 000	514	40	914	50	1/12
69208	P20/S2/6.5W/30K/25/CHOICE/STD	6.5	E26	120	3 000	≥90	25 000	554	25	1 708	50	1/12
69209	P20/S2/6.5W/30K/40/CHOICE/STD	6.5	E26	120	3 000	≥90	25 000	554	40	914	50	1/12
66283	P20/8W/40K/25/CHOICE/STD	8	E26	120	4 000	≥90	15 000	616	25	1 708	50	1/12
69211	P20/S2/6.5W/40K/40/CHOICE/STD	6.5	E26	120	4 000	≥90	25 000	575	40	914	50	1/12
PAR30SN												
67609	P30S/10W/30K/45/DESIGN/STD	10	E26	120	3 000	80	25 000	750	45	810	60	1/20
67610	P30S/10W/40K/45/DESIGN/STD	10	E26	120	4 000	80	25 000	750	45	810	60	1/20
69218	P30S/S2/8W/27K/25/CHOICE/STD	8	E26	120	2 700	≥90	25 000	887	25	3 843	75	1/6
66292	P30S/12W/27K/40/CHOICE/STD	12	E26	120	2 700	≥90	15 000	929	40	1 740	75	1/6
69220	P30S/S2/8W/30K/25/CHOICE/STD	8	E26	120	3 000	≥90	25 000	935	25	3 843	75	1/6
69221	P30S/S2/8W/30K/40/CHOICE/STD	8	E26	120	3 000	≥90	25 000	935	40	1 740	75	1/6
66295	P30S/12W/40K/25/CHOICE/STD	12	E26	120	4 000	≥90	15 000	1 006	25	3 843	75	1/6
69223	P30S/S2/8W/40K/40/CHOICE/STD	8	E26	120	4 000	≥90	25 000	985	40	1 740	75	1/6
PAR38												
67613	P38/15W/30K/45/DESIGN/STD	15	E26	120	3 000	80	25 000	1 200	45	1 150	100	1/10
67614	P38/15W/40K/45/DESIGN/STD	15	E26	120	4 000	80	25 000	1 200	45	1 500	100	1/10
66297	P38/16.5W/27K/25/CHOICE/STD	16.5	E26	120	2 700	≥90	15 000	1 360	25	6 067	100	1/6
66298	P38/16.5W/27K/40/CHOICE/STD	16.5	E26	120	2 700	≥90	15 000	1 398	40	2 527	100	1/6
69226	P38/S2/13W/30K/25/CHOICE/STD	13	E26	120	3 000	≥90	25 000	1 450	25	6 067	100	1/6
69227	P38/S2/13W/30K/40/CHOICE/STD	13	E26	120	3 000	≥90	25 000	1 450	40	2 527	100	1/6
69228	P38/S2/13W/40K/25/CHOICE/STD	13	E26	120	4 000	≥90	25 000	1 490	25	6 067	100	1/6
66302	P38/16.5W/40K/40/CHOICE/STD	16.5	E26	120	4 000	≥90	15 000	1 510	40	2 527	100	1/6
67914	P38H0/27W/30K/25/120-277/STD	27	E26	120-277	3 000	-	25 000	3 000	25	-	250	1/6



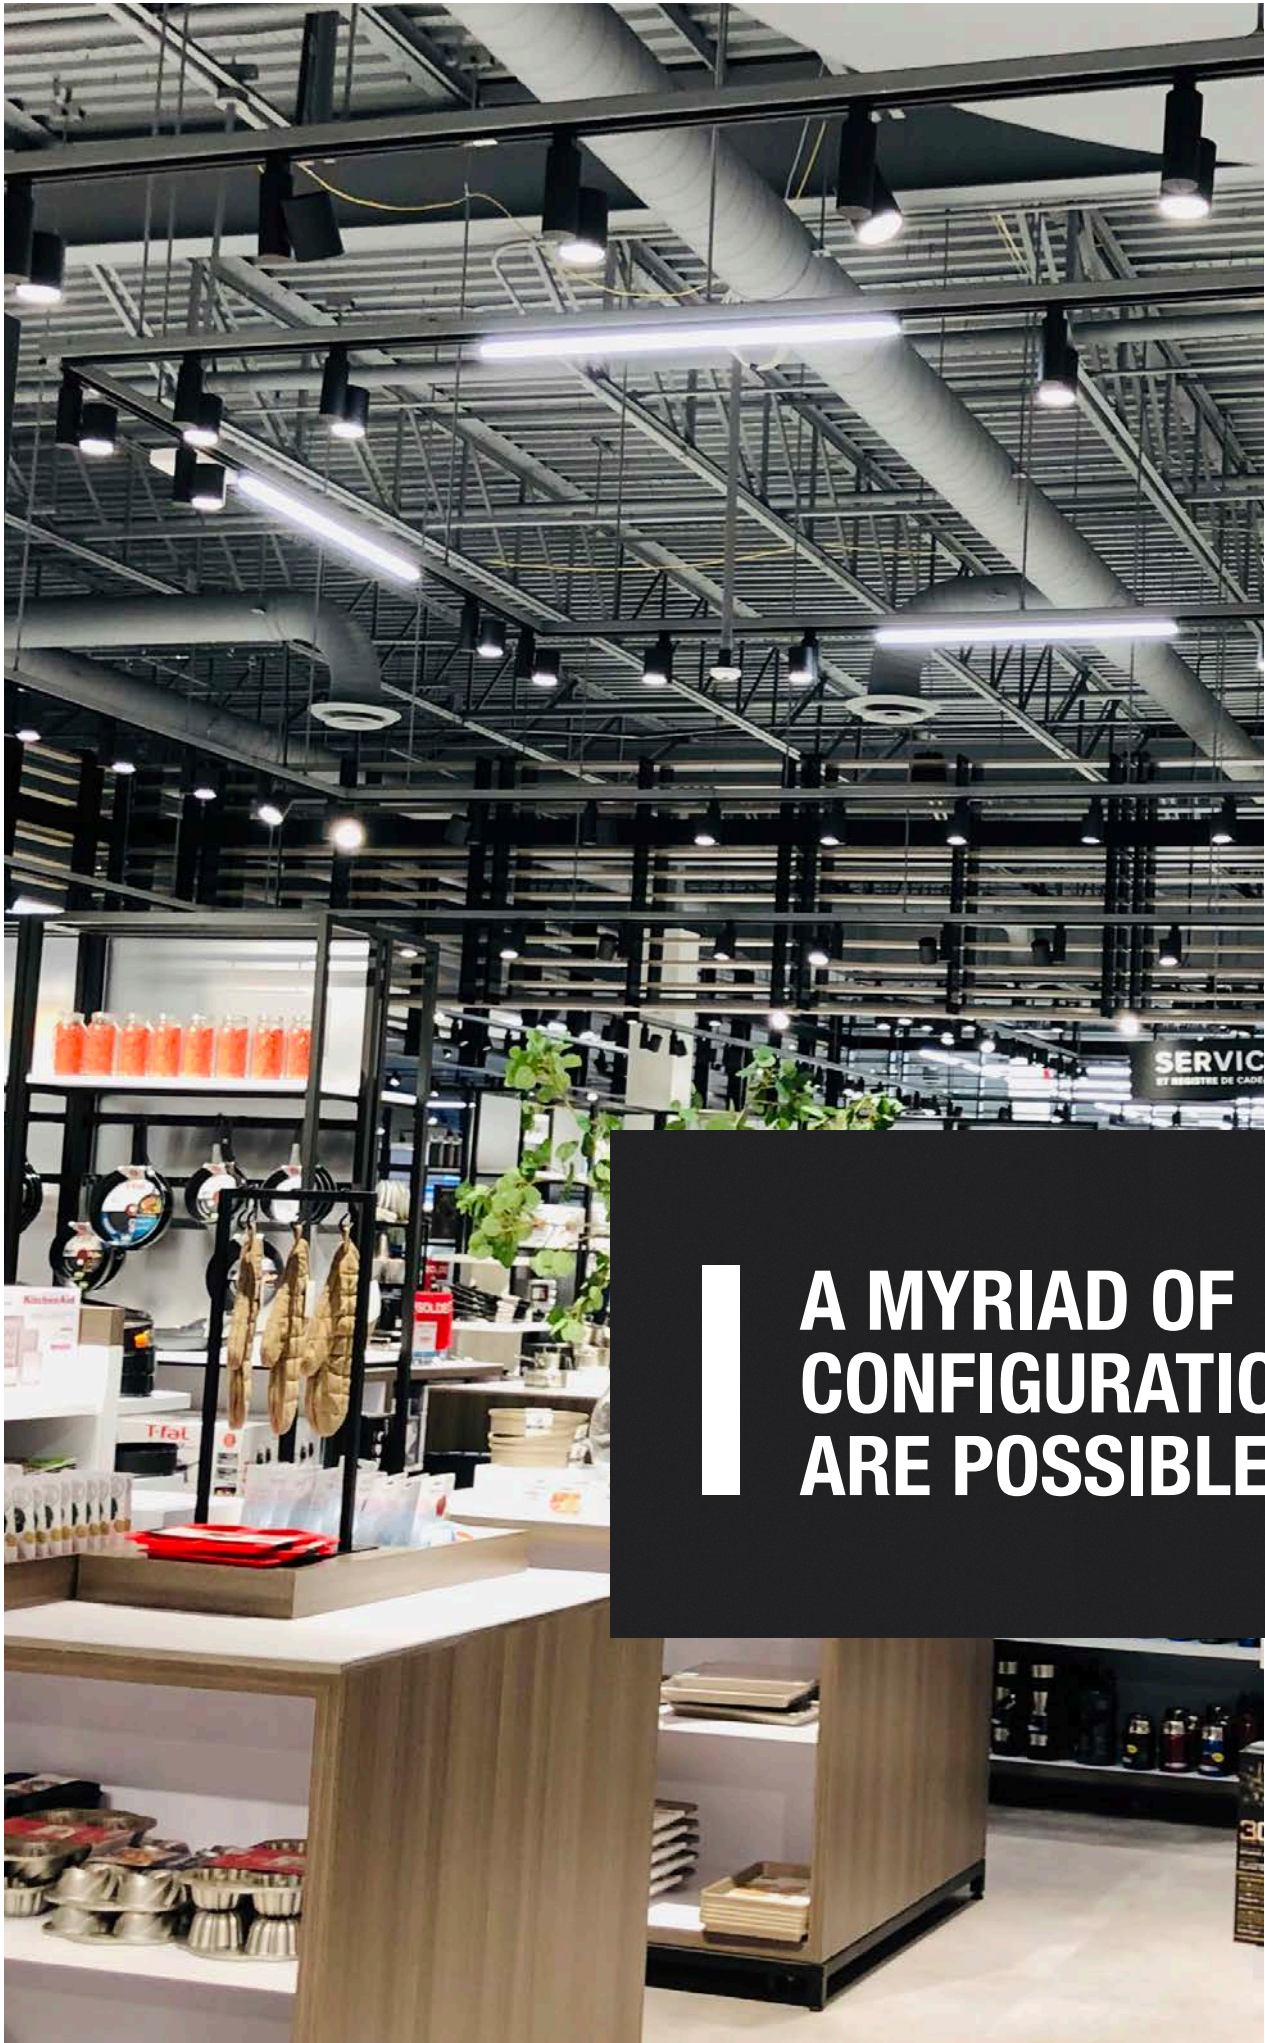

A MYRIAD OF CONFIGURATIONS ARE POSSIBLE





TRACK ACCESSORIES


Track accessories are available in black and in white

TRACK SECTIONS


STJ2-BK: 2' (24") length; 20-1/8" actual length
STJ2-WH: 2' (24") length; 20-1/8" actual length
STJ4-BK: 4' (48") length; 44-1/8" actual length
STJ4-WH: 4' (48") length; 44-1/8" actual length
STJ6-BK: 6' (72") length; 68-1/8" actual length
STJ6-WH: 6' (72") length; 68-1/8" actual length
STJ8-BK: 8' (96") length; 92-1/8" actual length
STJ8-WH: 8' (96") length; 92-1/8" actual length
STJ12-BK: 12' (144") length; 140-1/8" actual length
STJ12-WH: 12' (144") length; 140-1/8" actual length



Track J – Track Section View



**MINI-CONNECTOR
CONDUCTIVE**
ST22-BK
ST22-WH
ST22-SI

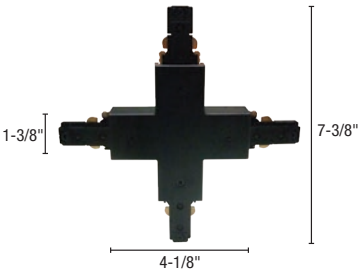

*** X-CONNECTOR**
ST25-BK
ST25-WH
ST25-SI




**END FEED
(TOP ACCESS)**
ST38-BK
ST38-WH
ST38-SI




**REVERSE
POLARITY**
ST38A-BK
ST38A-WH
ST38A-SI

**FLEXIBLE CONNECTOR
35° to 325° SINGLE CIRCUIT**
ST28-BK
ST28-WH
ST28-SI




**SURFACE
CONDUIT
END FEED**
ST27-BK
ST27-WH
ST27-SI




**REVERSE
POLARITY**
ST27A-BK
ST27A-WH
ST27A-SI

FLOATING FEED
ST26-BK
ST26-WH
ST26-SI




*** THREE WAY «L» JOINER**
ST23-BK
ST23-WH
ST23-SI

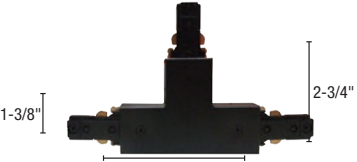

*** T-CONNECTOR**
ST24-BK
ST24-WH
ST24-SI


REVERSE POLARITY
ST24B-BK
ST24B-WH
ST24B-SI




MONOPOINT
ST40-BK
ST40-WH
ST40-SI



GROUNDING OUTLET
ST33-BK
ST33-WH
ST33-SI
Not UL listed



UTILITY HOOK
ST34-BK
ST34-WH
ST34-SI
(10 lbs capacity)
**Not UL listed
Non electrical**

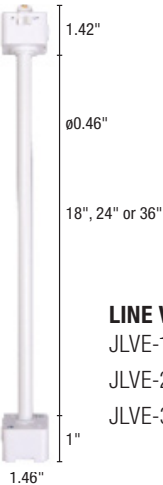

LINE VOLTAGE EXTENSION
JLVE-18-WH
JLVE-24-WH
JLVE-36-WH

For complete information, refer to www.standardpro.com
* Can also be used as inline feed.

WE WORK WITH YOU

National account chains have been an important and continued growing part of our business.

For many years, we have integrated our Architectural lighting in projects from small boutiques to large retail chains store and high end car dealerships.


We are able to supply or design custom fixtures to meet these applications needs and now with the merge of the two companies we can add to our current offering accent lighting, LED lamps, and deco fixtures.

Our ever growing architectural lighting offering is the perfect fit for any National and Retail lighting solutions.

National Chains



Custom Fixtures

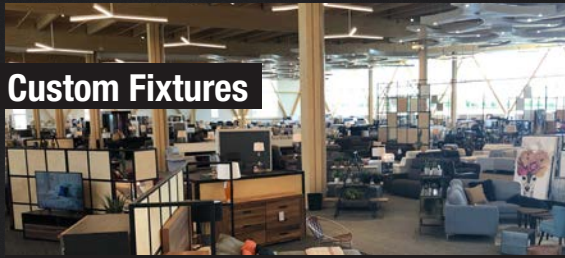

Car Dealerships



Boutiques



www.standardpro.com