

KOLIKA - L1KCL GEN. 2 QUICK SHIP Suspended

The KOLIKA L1KCL GEN2 offers a sleek and modern look for any commercial application. Available in 2', 4' or 8' in black or white. With its versatile features, including color selectable, direct or direct/indirect lighting, and connector accessories to arrange lighting set-ups in various shapes and configurations.



■ Lighting flexibility

Tailor any space with this sleek linear architectural fixture with options for direct or direct/indirect lighting, selectable color temperature in 3 000/3 500/4 000 K and excellent lumen efficacy!


■ Create exciting shapes

Add a personal touch with ready to install corner connectors for unique design patterns! Choice of connectors include L, T, X, Y and 120-degree for diverse design options.

■ Seamless mounting


Customize any project with our field-installed row mounting accessory. Effortlessly link fixtures for a smooth continuous run.

Linear Architectural Fixture

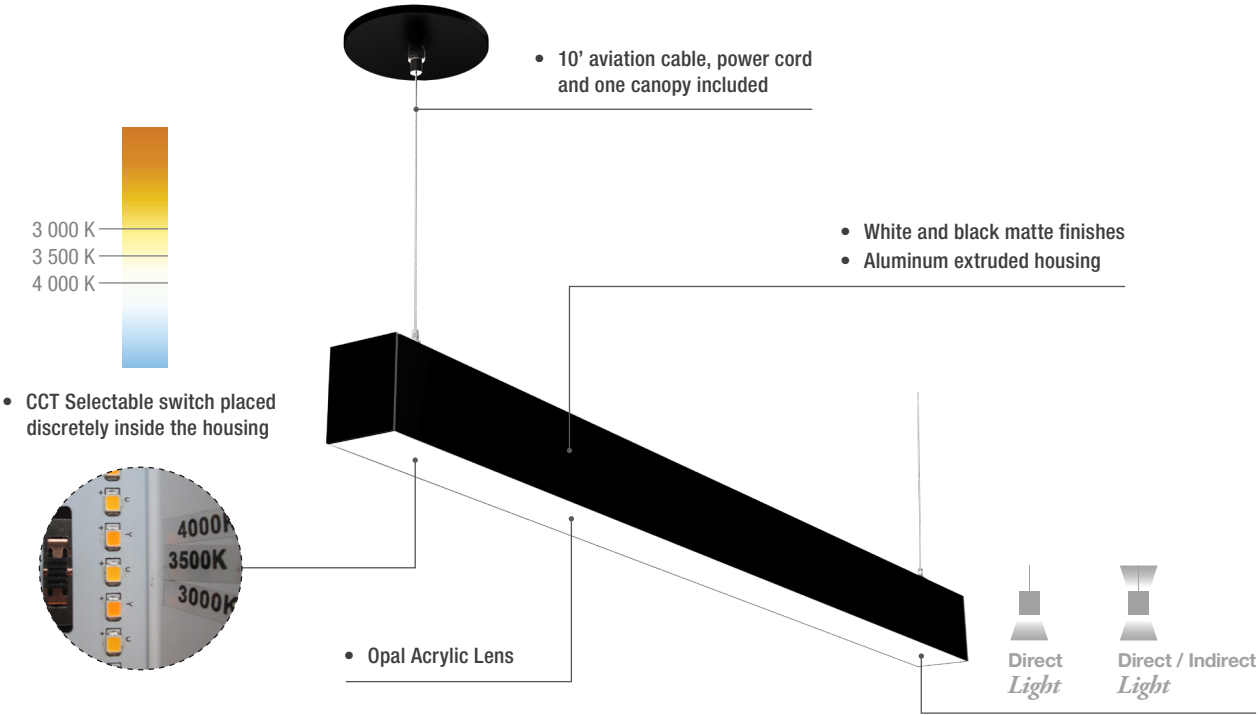

Illuminated Corner Connectors

Available in white and black, down light only




L shape




T shape



X shape




Y shape




120° shape


Create electrifying shapes!

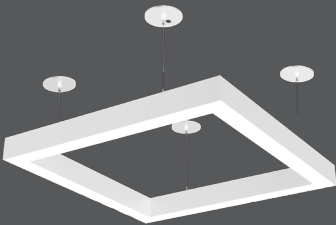

• L-corner connector

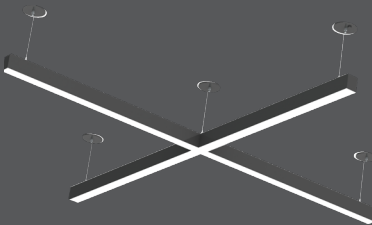

• X-corner connector

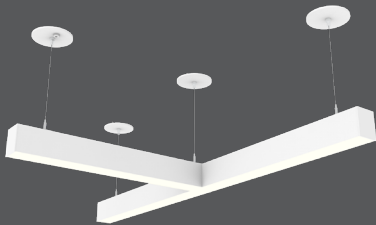

• T-corner connector

For visual purposes only.
Canopy and suspension components may vary depending on configuration.

Summary Specification Table

QUICK SHIP AND TECHNICAL SPECIFICATION TABLE ⌚

Order code	Model number	DLC Unique ID	Watts (W)	Volts (VAC)	Colour temp. (K) ¹	Lumen Output (lm) ²	Efficiency (lm/W)	CRI	Life L70 (hrs) ³	Tested LM-80 (hrs) ²	Finish	Power factor	THD (%)	Case qty (master)
2'														
Direct														
69604	L1KCL-G2-2LS1-3C-WH	S-DZMZCH	20	120-277	3 000/3 500/4 000	2 300 ⁴	115	80+	137 000	9 000	White	>0.9	<15	4
69605	L1KCL-G2-2LS1-3C-BK	N/A	20	120-277	3 000/3 500/4 000	2 300	115	80+	137 000	9 000	Black	>0.9	<15	4
Direct/Indirect														
69606	L1KCL-G2-2LS1U-3C-WH	N/A	20	120-277	3 000/3 500/4 000	2 400 ⁵	120	80+	137 000	9 000	White	>0.9	<15	4
69607	L1KCL-G2-2LS1U-3C-BK	N/A	20	120-277	3 000/3 500/4 000	2 300 ⁵	115	80+	137 000	9 000	Black	>0.9	<15	4
4'														
Direct														
68575 ⁶	L1KCL-G2-4LS1-3C-WH	N/A	25	120-277	3 000/3 500/4 000	3 026	121	80+	137 000	9 000	White	>0.9	<15	6
68576	L1KCL-G2-4LS2-3C-WH	S-PHBN72	40	120-277	3 000/3 500/4 000	4 600 ⁴	115	80+	137 000	9 000	White	>0.9	<15	6
68577	L1KCL-G2-4LS2-3C-BK	N/A	40	120-277	3 000/3 500/4 000	4 844	121	80+	137 000	9 000	Black	>0.9	<15	6
Direct/Indirect														
68578	L1KCL-G2-4LS2U-3C-WH	N/A	40	120-277	3 000/3 500/4 000	5 000 ⁵	125	80+	137 000	9 000	White	>0.9	<15	6
68579	L1KCL-G2-4LS2U-3C-BK	N/A	40	120-277	3 000/3 500/4 000	4 800 ⁵	120	80+	137 000	9 000	Black	>0.9	<15	6
8'														
Direct														
68580	L1KCL-G2-8LS1-3C-WH	S-2M4KCN	80	120-277	3 000/3 500/4 000	9 200 ⁴	115	80+	137 000	9 000	White	>0.9	<15	4
68581	L1KCL-G2-8LS1-3C-BK	N/A	80	120-277	3 000/3 500/4 000	9 760	122	80+	137 000	9 000	Black	>0.9	<15	4
Direct/Indirect														
68582	L1KCL-G2-8LS1U-3C-WH	N/A	80	120-277	3 000/3 500/4 000	10 000 ⁵	125	80+	137 000	9 000	White	>0.9	<15	4
68583	L1KCL-G2-8LS1U-3C-BK	N/A	80	120-277	3 000/3 500/4 000	9 600 ⁵	120	80+	137 000	9 000	Black	>0.9	<15	4

¹ Typical color temperature range: +/- 5 %.

² Lumen values are based on 3 500 K default setting. Please refer to Quick Ship Technical Specification Table for more details on other color temperatures.

³ Life hours are derived from IESNA LM-80-08 testing report and projected per IESNA TM-21-11 extrapolations.

⁴ Lumen values are derived from DLC reported data at 3 000 K. Please refer to the LUMEN SPECIFICATION TABLE for more details on other color temperatures.

⁵ 25% of lumen delivered uplight / 75% of lumen delivered downlight.

⁶ Fixture is not compatible with the corner connectors.

ILLUMINATED DIRECT CORNER CONNECTORS (ORDER SEPARATELY)

Order code	Model number	Shape	Compatible with	CRI	Environment	Dimmable	Finish	life L70 (Hrs)	Tested LM-80 (hrs)	Warranty years	Master Case QTY
69608	L1KCL-G2-L90CON-LS1-WH	L shape	L1KCL Gen2 Only	80+	Damp location	Yes	White	137 000	9 000	5	8
69609	L1KCL-G2-L90CON-LS1-BK	L shape	L1KCL Gen2 Only	80+	Damp location	Yes	Black	137 000	9 000	5	8
69610	L1KCL-G2-TCON-LS1-WH	T shape	L1KCL Gen2 Only	80+	Damp location	Yes	White	137 000	9 000	5	12
69611	L1KCL-G2-TCON-LS1-BK	T shape	L1KCL Gen2 Only	80+	Damp location	Yes	Black	137 000	9 000	5	12
69612	L1KCL-G2-XCON-LS1-WH	X shape	L1KCL Gen2 Only	80+	Damp location	Yes	White	137 000	9 000	5	8
69613	L1KCL-G2-XCON-LS1-BK	X shape	L1KCL Gen2 Only	80+	Damp location	Yes	Black	137 000	9 000	5	8
69614	L1KCL-G2-YCON-LS1-WH	Y shape	L1KCL Gen2 Only	80+	Damp location	Yes	White	137 000	9 000	5	8
69615	L1KCL-G2-YCON-LS1-BK	Y shape	L1KCL Gen2 Only	80+	Damp location	Yes	Black	137 000	9 000	5	8
69616	L1KCL-G2-120CON-LS1-WH	120°	L1KCL Gen2 Only	80+	Damp location	Yes	White	137 000	9 000	5	8
69617	L1KCL-G2-120CON-LS1-BK	120°	L1KCL Gen2 Only	80+	Damp location	Yes	Black	137 000	9 000	5	8

* Straight connection kits (brackets) included with each corner connector.

ACCESSORIES (ORDER SEPARATELY)

Order code	Model number	Type	Compatible with
68584	KIT-CK2	Continuous kit for row mounting	L1KCL Gen2 Only
69097	KIT-CANOPY-WH	Canopy Kit with suspension cable	L1KCL Gen2 Only
69098	KIT-CANOPY-BK	Canopy Kit with suspension cable	L1KCL Gen2 Only

* Please ensure to order a new kit for every fixture added.