

LPDL™ CHOICE LED Low Profile Downlight

LPDL™ Choice is a simple and economical solution for any downlight application where an even light is needed. Being less than 1" thick, it is made to be installed in any type of ceiling. This downlight offers a great quality-price rate.



dimmable



wet
location



Intertek



■ Less Than 1" Thick

The LPDL downlight is specially designed for installation in shallow or constrained ceiling spaces. In applications where joists or ductwork is present, the LPDL is the right CHOICE!


■ Adapted Color Temperature

Versatile solution available with integrated 5 color temperature (2 700/3 000/3 500/4 000/ 5 000 K). Easily select the desired color temperature using the switch located on the driver box.

■ FT4 Cable Rating

This downlight features FT4 rated cable for applications in most buildings including non-combustible constructions. It requires specific materials such as FT4 cable rating loosely running in the ceiling.

LPDL - The Downlight of CHOICE!

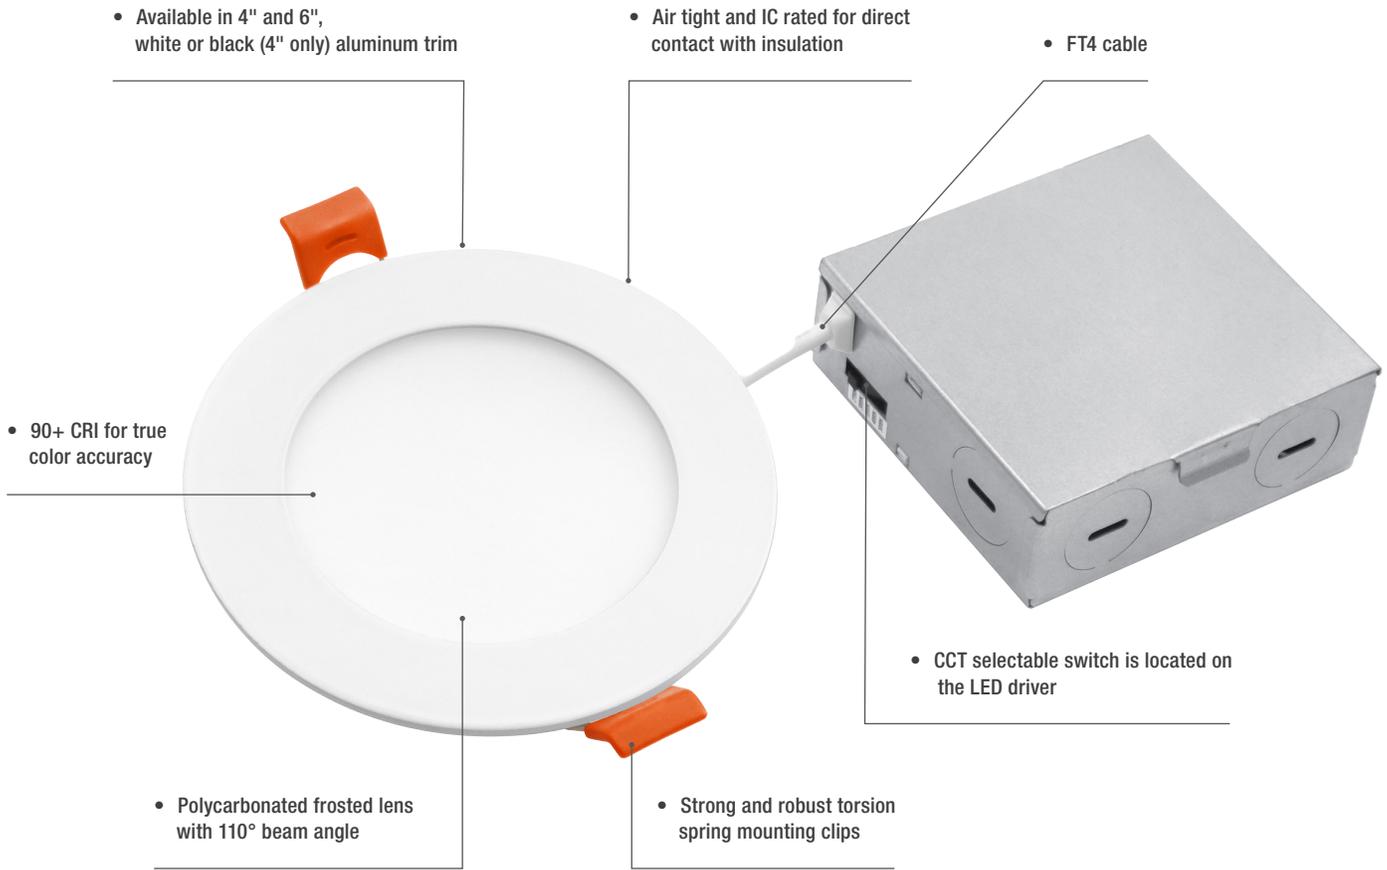

Compatible Accessories

Select from a variety of accessories for different installation options!



Mounting plate with hanger bars



Adjustable mounting plate



Square mounting plate



Vapor barrier extender



Goof rings



6' Extension Cord