



L1LEH ECONO LED LINEAR HIGH BAY LUMINAIRE

Stanpro's economic L1LEH Linear High Bay with optional integrated sensor, is ideally suited for high ceiling warehouses as well as arenas where uniform and efficient lighting is required.



quick
ship

6

damp
location



■ Integrated Sensor

Neatly integrated on the fixture, the PIR and High frequency sensors are easy to install and operate.

■ 6' Cable Standard


6' Cable is standard in all configurations for the L1LEH series.

■ Multiple Mounting Options

V-Hooks for dual point chain (standard for all configurations). Other accessories available for surface and conduit mount.

A Versatile Economic Linear High Bay

The L1LEH Series is offered in a variety of sizes, lumen packages, wattage outputs and is multi-volt making it a convenient and effective solution for your lighting needs.

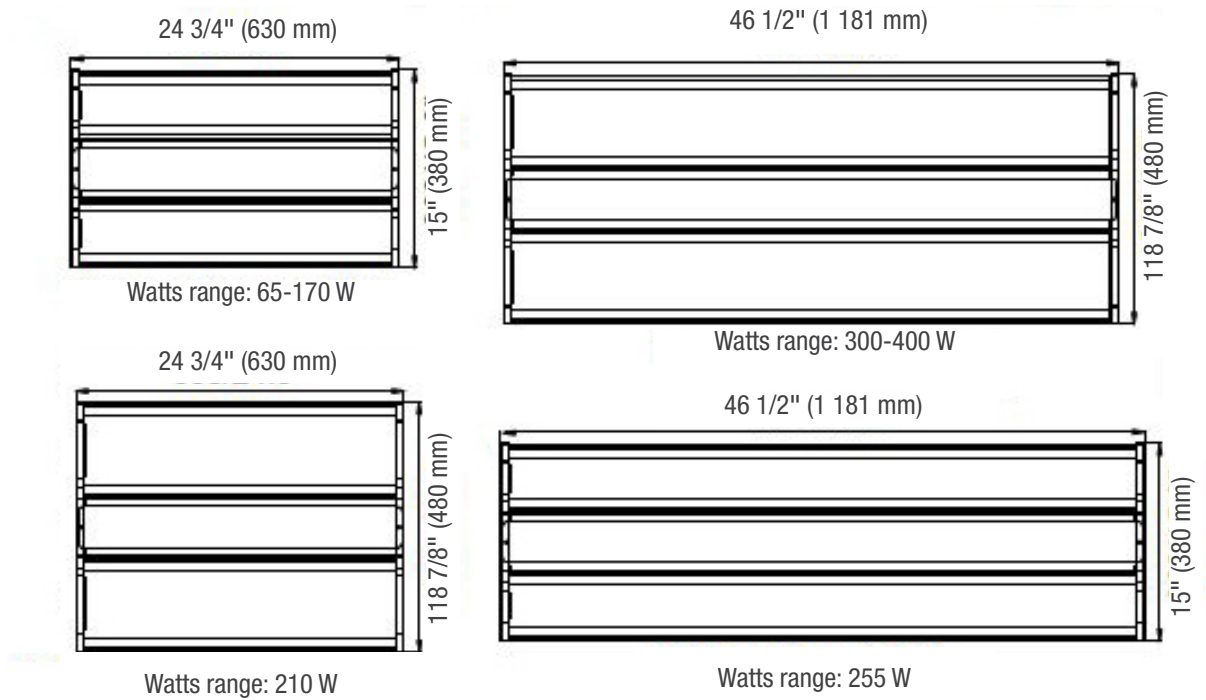

Integrated PIR or High Frequency Sensor

A reliable option for improved building security and energy savings

PIR sensor kit (69603)
OSI-IFS05R-HBL1



High Frequency Sensor (68916)
KITOSI-EFS06R



Remote
Remote for 69603 & 68916



Summary Specification Table


Order code	Model number	DLC Unique ID	Watts (W)	Volts (VAC)	Color temp. (K) ¹	Lumen output (lm) ²	Efficacy (lm/W)	CRI	Life L70 (hrs) ³	Tested hours LM-80 (hrs) ³	Power factor	Dimming type (V)	THD (%)
24"													
68754	L1LEH-24LS1-Q/40K	PWJRNSYW	85	120-347	4 000	11 475	135	80+	>54 000	9 000	0.9	0-10	10
68756	L1LEH-24LS2-Q/40K	PBCKEBGU	130	120-347	4 000	17 550	135	80+	>54 000	9 000	0.9	0-10	10
68757	L1LEH-24LS2-Q/50K	PIJBYCBG	130	120-347	5 000	17 680	136	80+	>54 000	9 000	0.9	0-10	10
68758	L1LEH-24LS3-Q/40K	PU1XH61D	170	120-347	4 000	22 950	135	80+	>54 000	9 000	0.9	0-10	10
68759	L1LEH-24LS3-Q/50K	POFB7T5C	170	120-347	5 000	23 120	136	80+	>54 000	9 000	0.9	0-10	10
68760	L1LEH-24LS4-Q/40K	PFHT7Q6B	210	120-347	4 000	28 350	135	80+	>54 000	9 000	0.9	0-10	10
68761	L1LEH-24LS4-Q/50K	P8FTRIA6	210	120-347	5 000	28 560	136	80+	>54 000	9 000	0.9	0-10	10
48"													
68763	L1LEH-48LS1-Q/50K	PLDFIMRC	255	120-347	5 000	34 425	135	80+	>54 000	9 000	0.9	0-10	10
68764	L1LEH-48LS2-Q/40K	PT8PK5RS	300	120-347	4 000	40 723	136	80+	>54 000	9 000	0.9	0-10	10
68765	L1LEH-48LS2-Q/50K	PSOCKWXU	300	120-347	5 000	41 140	137	80+	>54 000	9 000	0.9	0-10	10
68767	L1LEH-48LS3-Q/50K	PM5KZQ8I	400	120-347	5 000	53 607	134	80+	>54 000	9 000	0.9	0-10	10

¹ Typical color temperature range: +/- 5 %.

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

³ Life hours are derived from IESNA LM-80-08 testing report and projected per IESNA TM-21-11 extrapolations.

INCLUDED IN THE BOX

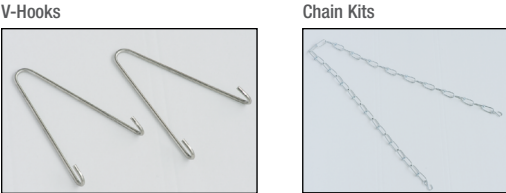

ACCESSORIES (order separately)

Order code	Model number	Type	Compatible with
68910	BKT846	Surface mount bracket kit (set of 2)	68754, 68756, 68757, 68758, 68759, 68760, 68761, 68763, 68764, 68765, 68767
68911	BKT847	Conduit mount kit for L1LEH	68754, 68756, 68757, 68758, 68759, 68760, 68761, 68763, 68764, 68765, 68767
68912	WGD911-2FT	Wireguard 2 ft / 4 L for L1LEH	68754, 68756, 68757, 68758, 68759
68913	WGD911-2FT-W	Wireguard 2 ft / 6 L for L1LEH	68760, 68761
68914	WGD911-4FT	Wireguard 4 ft / 4 L for L1LEH	68763
68915	WGD911-4FT-W	Wireguard 4 ft / 6 L for L1LEH	68764, 68765, 68766, 68767
68916 ¹	KITOSI-EFS06R	External high frequency sensor kit EFS06R	68754, 68756, 68757, 68758, 68759, 68760, 68761, 68763, 68764, 68765, 68767
69603 ²	OSI-IFS05R-HBL1	External PIR sensor kit OSI-IFS05R-HBL1	68754, 68756, 68757, 68758, 68759, 68760, 68761, 68763, 68764, 68765, 68767
69080	OSI-RM51	Remote control RM51 for motion sensors	68916, 69603

¹ To change factory settings, purchase remote (sold separately).

² The settings can be either changed by switches, or by a remote (sold separately).