




WPS GEN 4 Classic Wall Pack

Selectable color temperature (3 000 K / 4 000 K / 5 000 K), Power selectable, Integrated photocell and Multi-Voltage (120-347 V)¹

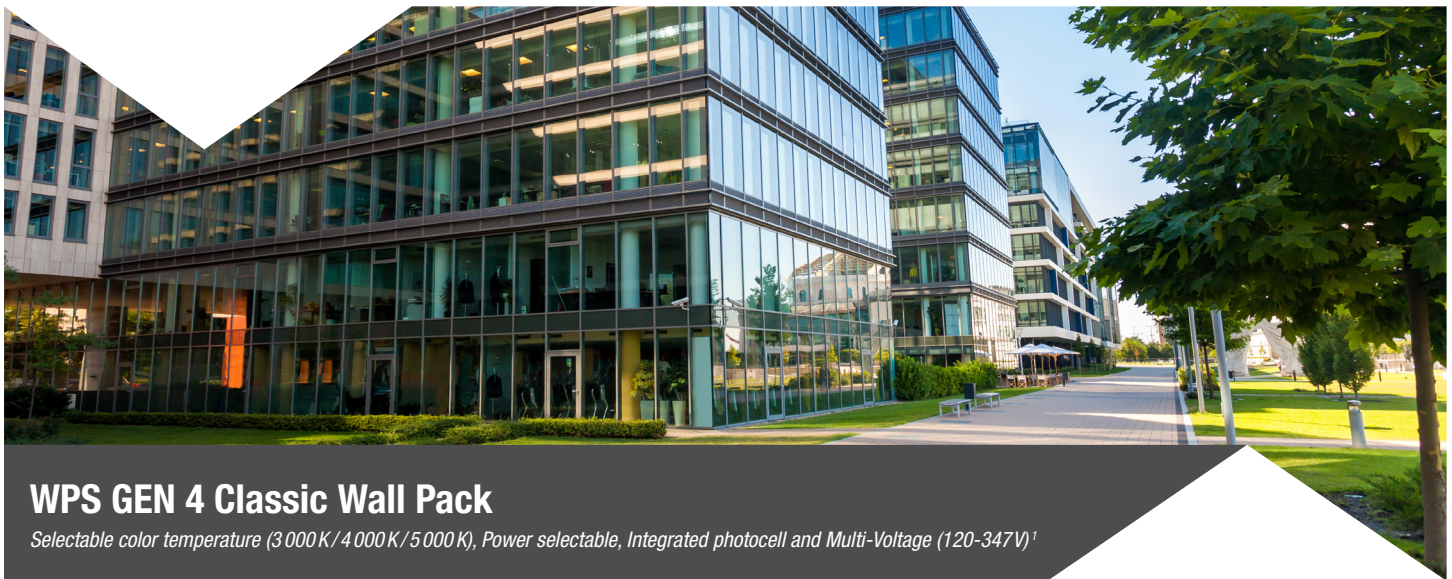


Features

- Power selectable¹
- 4 000 K, 5 000 K and 3 CCT select (3 000 K / 4 000 K / 5 000 K)¹
- Integrated Photocell that can be easily disabled¹
- 0-10 V dimmable
- Prismatic tempered glass lens
- 120-277 V, 120-347 V
- Ambient temperature: -40°C to +50°C
- Options: Occupancy sensor, 10 kV surge protection, Paintable
- Accessories: Glareshield, Wireguard, Back plate






Selectable color temperature and ON/OFF integrated photocell¹



Power selectable¹

	Order code	
Power Selection	68314	68315
1	25 W	60 W
2	30 W	80 W
3	40 W	100 W



Order code	Model number	Watts (W)	Volts (V)	Color temp. (K)	Lumen output (lm)	Efficiency (lm/W)	Photo-cell ²	CRI	Life L70 (hrs)	Tested hours LM-80 (hrs)	Calculated TM21 (hrs)	Finish	Dimming	LED current (mA)	Power factor	THD (%)	Case qty (master)
Power Select, CCT Select and Integrated Photocell²																	
68314	WPS-PS40-Q-3C	25/30/40	120-347	3CCT (30/40/50)	3 625 - 5 800	140-150	Yes	>80	54 000	9 000	173 600	Bronze	Yes	850	≥0.9	≤20	1
68315	WPS-PS100-Q-3C	60/80/100	120-347	3CCT (30/40/50)	8 520 - 14 500	140-152	Yes	>80	54 000	9 000	173 600	Bronze	Yes	2 100	≥0.9	≤20	1
Single Power, Single CCT and Integrated Photocell²																	
68524	WPS-NS30-W/40K	29	120-277	4 000	4 200	150	Yes	>80	54 000	9 000	173 600	Bronze	Yes	230	≥0.9	≤20	1
68525	WPS-NS30-W/50K	29	120-277	5 000	4 300	148	Yes	>80	54 000	9 000	173 600	Bronze	Yes	230	≥0.9	≤20	1
Single Power and Single CCT																	
68490	WPS-NS40-W/40K	40	120-277	4 000	6 004	142	No	>80	54 000	9 000	173 600	Bronze	Yes	354	≥0.9	≤20	1
68491	WPS-NS40-W/50K	40	120-277	5 000	6 034	144	No	>80	54 000	9 000	173 600	Bronze	Yes	354	≥0.9	≤20	1
68492	WPS-NS60-W/40K	60	120-277	4 000	8 458	146	No	>80	54 000	9 000	173 600	Bronze	Yes	486	≥0.9	≤20	1
68493	WPS-NS60-W/50K	60	120-277	5 000	8 611	147	No	>80	54 000	9 000	173 600	Bronze	Yes	486	≥0.9	≤20	1
68497	WPS-NS80-W/40K	80	120-277	4 000	11 242	146	No	>80	54 000	9 000	173 600	Bronze	Yes	645	≥0.9	≤20	1
68498	WPS-NS80-W/50K	80	120-277	5 000	11 446	148	No	>80	54 000	9 000	173 600	Bronze	Yes	645	≥0.9	≤20	1
Single Power, CCT Select and Integrated Photocell²																	
68316	WPS-NS120-Q-3C	120	120-347	3CCT (30/40/50)	16 943 - 17 885	140-152	Yes	>80	54 000	9 000	173 600	Bronze	Yes	2 600	≥0.9	≤20	1

¹ Integrated photocell, CCT and Power selectable on some configurations. Consult Quick ship and technical specification table for more details.

² Integrated ON/OFF photocell that can be easily disabled.

Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/search.