

## TRADITIONAL CCT SELECTABLE LED CEILING LUMINAIRE

Available in different sizes, our Traditional LED Ceiling Luminaire series provides a uniform illumination making them perfect for both commercial and decorative applications.



### ■ Color Selectable

Versatile solution with an integrated color temperature selection of 2 700/3 000/4 000 K for the 8" luminaires and, of 2 700/3 000/3 500/4 000/5 000 K for 11" and 14" ones. Easily select the desired color temperature using the switch located inside the housing. An ideal solution for reducing stocking inventory.


### ■ Timeless design

With our LED Traditional ceiling luminaires enjoy a classical yet timeless design. Ideal for living rooms, hallways, kitchens, bedrooms and so much more!

### ■ Easily installed

Appreciate an easy installation and maintenance, with a lens that is easily removable.

# Timeless and convenient!

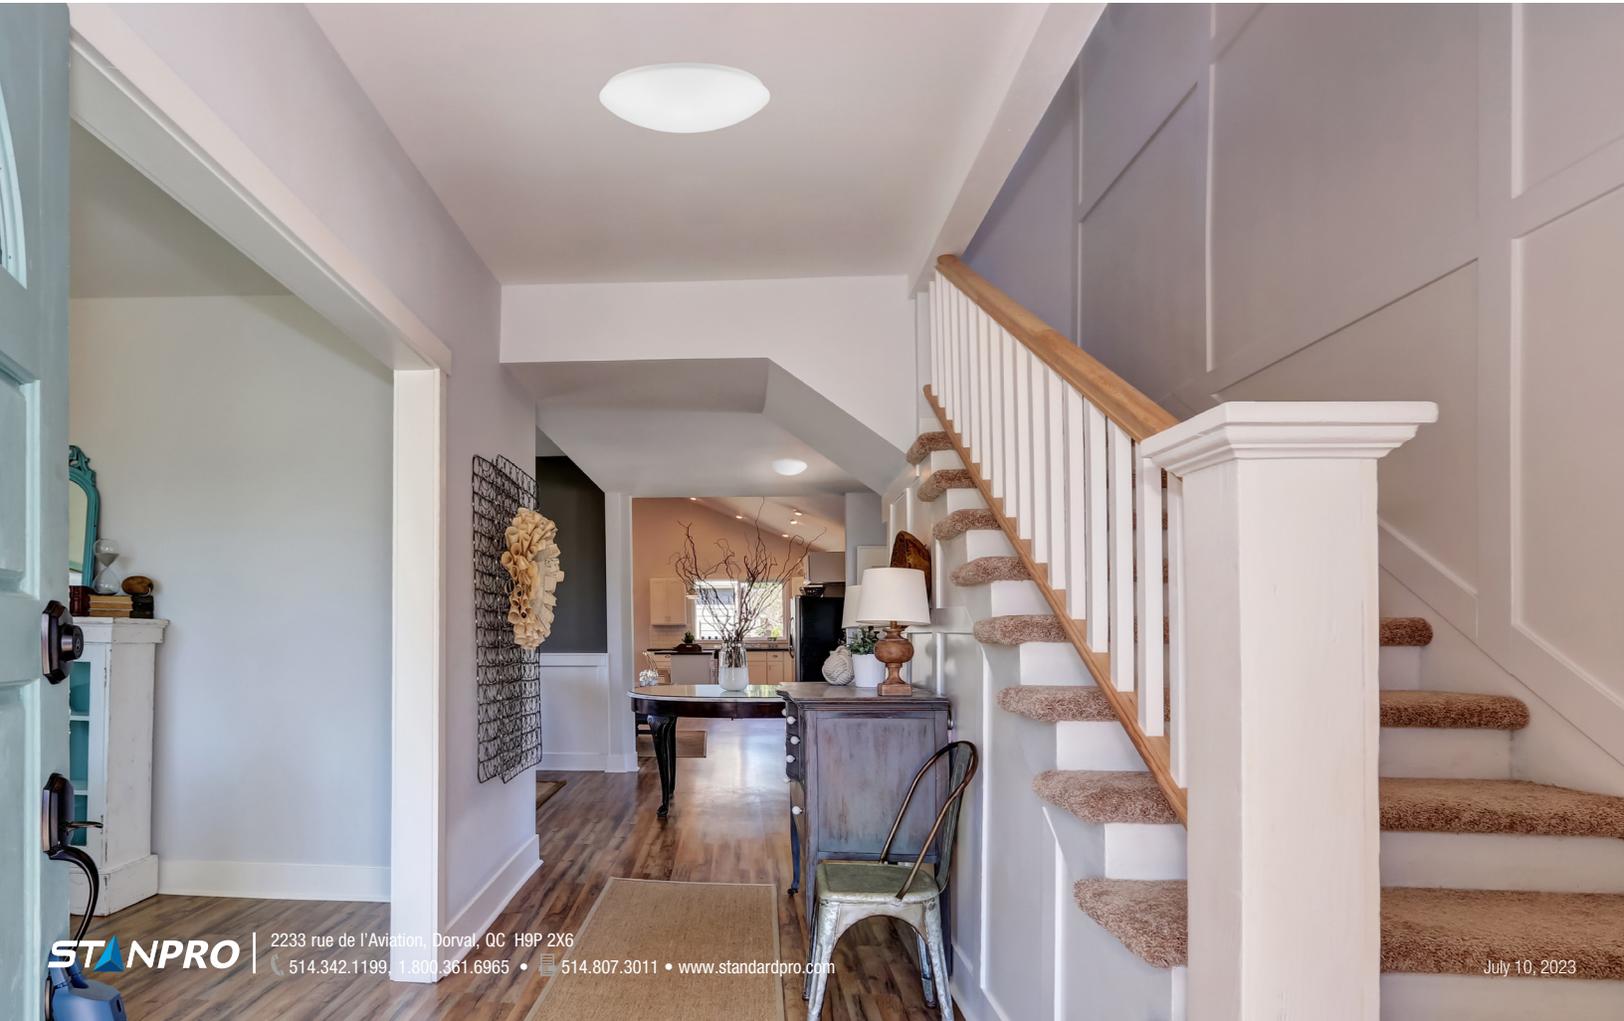

# Specification Table

Order code	Model number	Watts (W)	Volts (VAC)	Color temp. (K) <sup>1</sup>	Lumen output (lm) <sup>2</sup>	Efficiency (lm/W)	CRI	Life L70 (hrs) <sup>3</sup>	Beam angle (°)	Shape	Finish	Dimming (Yes/No)	Power factor	Master case qty
<b>3 CCT SELECTABLE</b>														
<b>8"</b>														
68971	CLTD8-R12W-A-3CWH	12	120	2 700/3 000/4 000	1 159	98	80+	50 000	120	Round	White	Yes	≥0.90	12
<b>5 CCT SELECTABLE</b>														
<b>11"</b>														
68972	CLTD11-R20W-A-5CWH	20	120	2 700/3 000/3 500/4 000/5 000	1 500	75	80	50 000	110	Round	White	Yes	≥0.70	8
<b>14"</b>														
68973	CLTD14-R24W-A-5CWH	24	120	2 700/3 000/3 500/4 000/5 000	1 800	75	80	50 000	110	Round	White	Yes	≥0.70	8

<sup>1</sup> Typical color temperature range: +/- 5 %.

<sup>2</sup> Lumen values are derived from Energy Star reported data. Initial lumens range: +/- 10 %.

<sup>3</sup> Life hours are derived from IESNA LM-80-08 testing report and projected per IESNA TM-21-11 extrapolations.

## Compatible accessories

### ACCESSORIES (order separately)

Order code	Model number	Type	Finish	Diameter (in.)	Compatible with	Case qty (master)
68974	LEN-CLTD8	Lens	Frosted	8 1/4	68971	20
68975	LEN-CLTD11	Lens	Frosted	10 7/8	68972	5
68976	LEN-CLTD14	Lens	Frosted	13 3/4	68973	5

