

WDP-L DECORATIVE WALL PACK

The WDP-L is a decorative luminaire with an oval, screwless housing, making it easy to install while preserving the integrity of the design. This luminaire is generally used in the following applications: building entry-ways, hotels/condominiums balcony lighting, ect.



quick
ship



■ Color Selectable

The WDP-L series is offering the ultimate versatility, with the ability to change the color temperature (3 000/4000/5000 K) to fulfill the need of a variety of projects and applications. It is an ideal cost-effective solution to reduce stocking inventory.

■ Photocell included

An on-off photocell is integrated inside the luminaire and can be easily disabled.

■ Dimmable Fixture

Thanks to its dimming function, this luminaire provides perfect lighting for all applications.

FEATURES

Two 1/2" conduit entries located at the top and the back of the luminaire

Includes an On/Off photocell which can easily be disabled


3 CCT Selectable
(3 000/4 000/5 000 K)

Aluminum die cast housing,
available in a black, bronze
and white finish

Prismatic
polycarbonate lens

EASY TO INSTALL

Screwless housing for easy installation

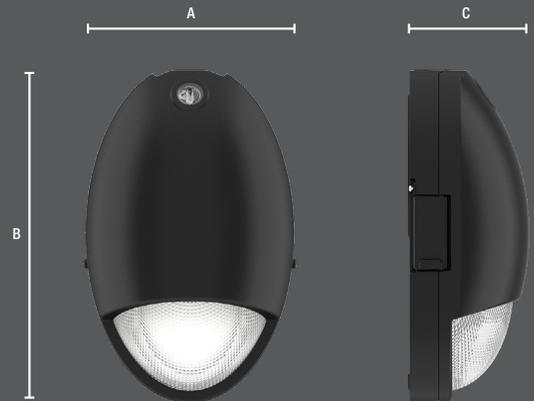

DIMENSIONS

A in. (cm)	6 5/8" (16.8)
B in. (cm)	10 3/8" (26.3)
C in. (cm)	3 3/4" (9.61)
Net weight (lbs)	3.21

Summary Specification Table

Order code	Model number	Watts (W)	Volts (VAC)	Color temp. (K) ¹	Lumen output (lm) ²	Efficacy (lm/W)	CRI	Life L70 (hrs) ³	Tested hours LM-80 (hrs) ³	Distribution Type	BUG	LED Current (mA)	Finish	Photocell (Yes/No) ⁴	Dimming (Yes/No)	Power factor	THD (%)	Traditional equivalent (W)	Master case qty
CCT Selectable with Integrated Photocell																			
69726	WDP-LS1-W-3C-BR	15	120-277	3 000/4 000/5 000	1 884	132	80+	163 000	9 000	III	B0 U2 G1	0,21-0,057	Bronze	Yes	Yes	0.931	7.4	70	17
69727	WDP-LS1-W-3C-BK	15	120-277	3 000/4 000/5 000	1 884	132	80+	163 000	9 000	III	B0 U2 G1	0,21-0,057	Black	Yes	Yes	0.931	7.4	70	17
69728	WDP-LS1-W-3C-WH	15	120-277	3 000/4 000/5 000	1 884	132	80+	163 000	9 000	III	B0 U2 G1	0,21-0,057	White	Yes	Yes	0.931	7.4	70	17

¹ Typical color temperature range: +/- 5 %.

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

³ Life hours are derived from IESNA LM-80-08 testing report and projected per IESNA TM-21-11 extrapolations.

⁴ Integrated ON/OFF photocell that can be easily disabled.