

WSL CHOICE LED SLIM WALL PACK

The WSL includes all the options required for a wall-mounted luminaire. With its slimmer profile, this series is equipped with a photocell and benefits from the latest LED technology, allowing the user to control color temperature and wattage via integrated switches. Typical applications are security lighting over entrances, stairwells and pedestrian areas. This modern-style series is an excellent choice for any industrial or commercial application.



■ Color and Power Selectable

An all-in-one LED wall pack solution offering ultimate versatility, with the ability to change the color temperature (3 000/4 000/5 000 K) as well as the lumen packages to meet the needs of a variety of projects and applications. An ideal solution for reducing stocking inventory.

■ Photocell included

An on-off photocell is integrated on both models which can be easily disabled.

■ Easy Maintenance

They offer safe and simple installation which also allows for years of little to no maintenance with an extremely cost efficient operation.

WSL CHOICE: FEATURES

- Four 1/2" conduit entries located on each sides of the luminaire


- Includes an On/Off photocell which can easily be disabled



- Prismatic tempered glass lens

3 CCT and Power Selectable switches, discretely placed inside the housing

- Die-cast aluminum housing, available in a black or bronze finish

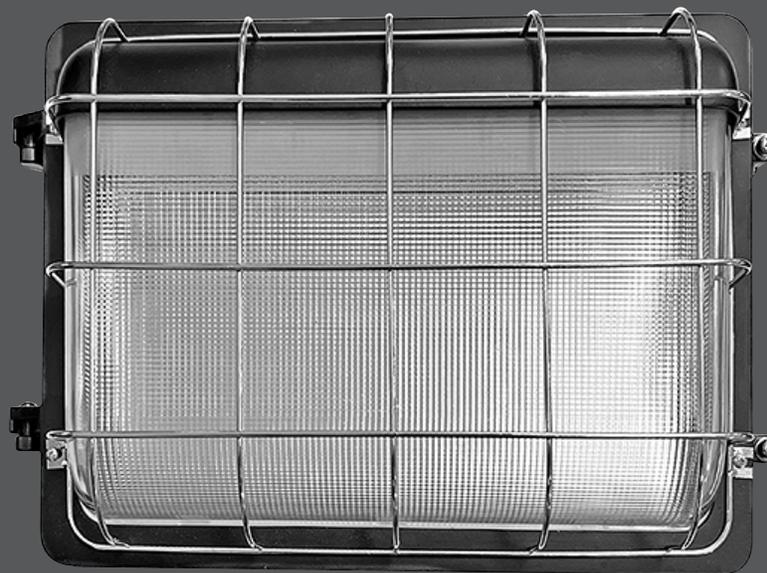

ACCESSORY (order separately)
69725: Wireguard

Summary Specification Table

Order code	Model number	Watts (W)	Volts (VAC)	Color temp. (K) ¹	Lumen output (lm) ^{2,3}	Efficiency (lm/W)	CRI	Life L70 (hrs) ⁴	BUG	Finish	Photocell (Yes/No)	Dimming (Yes/No)	Power factor	THD (%)	Master case qty
69721	WSL-PS60-Q-3C-BK/CHOICE	30/40/60	120-347	30/40/50K	4 200/5 600/8 400	140	80+	50 000	133	Black	Yes	Yes	0.99	20	1
69722	WSL-PS80-Q-3C-BK/CHOICE	40/60/80	120-347	30/40/50K	5 600/8 400/11 200	140	80+	50 000	134	Black	Yes	Yes	0.91	20	1
69723	WSL-PS60-Q-3C-BR/CHOICE	30/40/60	120-347	30/40/50K	4 200/5 600/8 400	140	80+	50 000	133	Bronze	Yes	Yes	0.99	20	1
69724	WSL-PS80-Q-3C-BR/CHOICE	40/60/80	120-347	30/40/50K	5 600/8 400/11 200	140	80+	50 000	134	Bronze	Yes	Yes	0.91	20	1

QUICK SHIP: Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

¹ Typical color temperature range: +/- 5 %.

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

³ Lumen values are based on 4 000 K default programming. Please refer to the LUMEN SPECIFICATION TABLE for more details on other color temperatures.

⁴ Life hours are derived from IESNA LM-80-08 testing report and projected per IESNA TM-21-11 extrapolations