



360° High Output LED CCT and Power Selectable

Convert metal-halide (MH) and other high-intensity discharge (HID) fixtures into long-lasting, energy-efficient LED fixtures with Standard's new CCT and Power Selectable 360° High Intensity LED lamps.

These high energy efficient and performant LED lamps are a simple and economic retrofit solution for applications such as high-bays, post tops and bollards. They can replace up to 600 W HID!

The 18/27/36 W lamp is also compatible with a plug-and-play external photocell or motion sensor available for additional lighting control.



LED chips mounted on top
for a 360° light output

18 W

Order code	Description	Watts (W)	Base	Volts (VAC)	Color temp. (K)	CRI	Life L70 (hrs)	Lumen output (lm)	Operating position	Case qty (master)
360° 120-277 V										
69547	CRN/S3/18W/40K/BYP/120-277/E26/STD	18	E26	120-277	4 000	80	50 000	2 600	Vertical	24
69548	CRN/S3/18W/50K/BYP/120-277/E26/STD	18	E26	120-277	5 000	80	50 000	2 715	Vertical	24

Lumen values are derived from photometric testing


damp
location

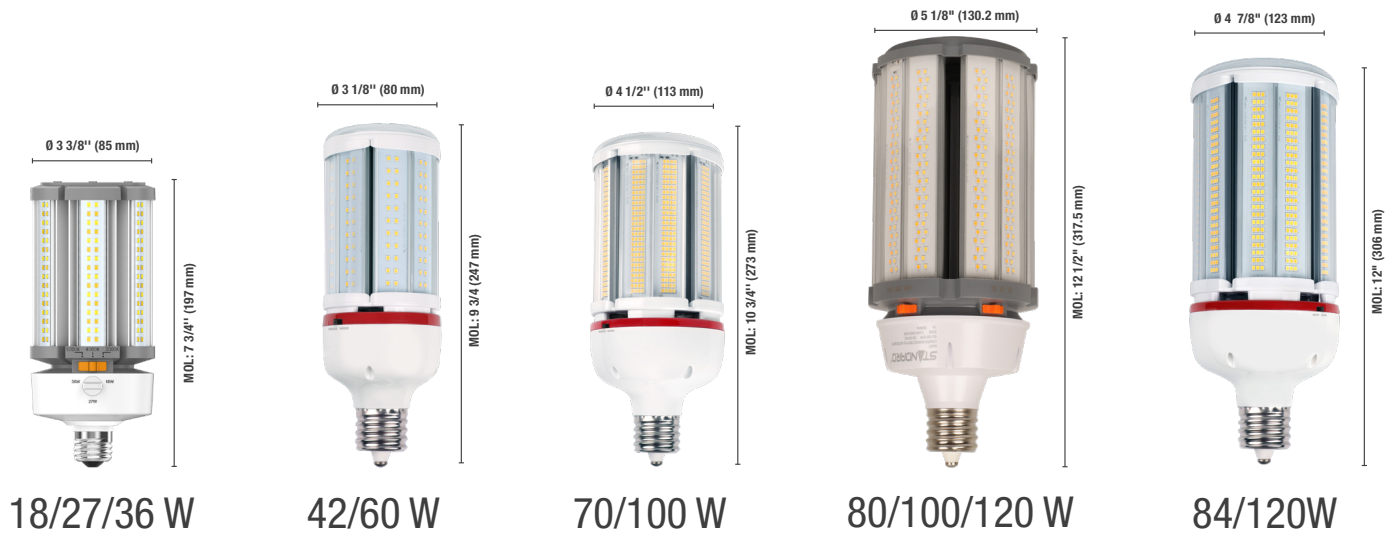

enclosed
fixture


non
dimmable

5 yrs
warranty


CERTIFIED





Order code	Description	Watts (W)	Base	Volts (VAC)	Color temp. (K)	CRI	Life L70 (hrs)	Lumen output (lm)	Bare lamp lumen (lm)	Operating position	Case qty (master)
360° 120-347 V CCT & Power Select											
69421	CRN/PS120W/3CCT/BYP/120-347/EX39/STD	80/100/120	EX39	120-347	3 000/4 000/5 000	80	50 000	8 565 - 12 545	12 000- 18 000	Vertical	9
360° 120-277 V CCT & Power Select											
69124	CRN/PS36W/3CCT/BYP/120-277/E26/STD	18/27/36	E26	120-277	3 000/4 000/5 000	80	50 000	-	5 220	Vertical/Horizontal	12
69125 ¹	CRN/PS60W/2CCT/BYP/120-277/EX39/STD	42/60	EX39	120-277	4 000/5 000	80	50 000	5 376/7 659	9 300	Vertical/Horizontal	12
69127 ¹	CRN/PS100W/2CCT/BYP/120-277/EX39/STD	70/100	EX39	120-277	4 000/5 000	80	50 000	8 400/11 746	15 500	Vertical	6
69128 ¹	CRN/PS120W/2CCT/BYP/120-277/EX39/STD	84/120	EX39	120-277	4 000/5 000	80	50 000	10 248/14 404	18 600	Vertical	6

Accessories

Order code	Description	Compatible with
69167	Accessory photocell PIR sensor	69124



Lumen values are derived from photometric testing

6
damp
location

enclosed
fixture

non
dimmable

5
yrs
warranty

UL
CERTIFIED

DLC
LISTED

STANDARD