



# LED Filament

The LED filament lamps distinguish themselves by their sparkling white light, blending perfectly with crystal chandeliers and modern style fixtures.

The LED filament victorian style lamps, they have an amber coating which provides a warm light that resembles the ambiance created by incandescent lamps.

This line also includes a long life lamps series, which bring style to any decor while offering an exceptional long life of 25 000 hours.



Order code	Description	Filament type	Watts (W)	Base	Volts (VAC)	Color temp. (K)	CRI	Life L70 (hrs)	Lumen output (lm)	Traditional equivalent (W)	Case qty (inner/master)
<b>Soft White</b>											
<b>A19</b>											
70317	A19/S4/7W/27K/SW/FIL/STD	N/A	7	E26	120	2 700	80	15 000	800	60	50
70318	A19/S4/7W/30K/SW/FIL/STD	N/A	7	E26	120	3 000	80	15 000	800	60	50
<b>B11</b>											
70326	B11/S4/3.5W/27K/SW/E12/FIL/STD	N/A	3.5	E12	120	2 700	80	15 000	350	25	50
70327	B11/S4/3.5W/30K/SW/E12/FIL/STD	N/A	3.5	E12	120	3 000	80	15 000	350	25	50
<b>G16.5</b>											
68939	G16.5/S4/5W/27K/E12/SW/FIL/STD	NA	5	E12	120	2 700	80	15 000	450	40	10/100
68940	G16.5/S4/5W/30K/E12/SW/FIL/STD	NA	5	E12	120	3 000	80	15 000	450	40	10/100
68941	G16.5/S4/5W/40K/E12/SW/FIL/STD	NA	5	E12	120	4 000	80	15 000	450	60	10/100
<b>G25</b>											
67662	G25/S3/4.5W/27K/SW/FIL/STD	N/A	4.5	E26	120	2 700	80	15 000	380	40	10/40
68946	G25/S3/7W/30K/SW/FIL/STD	NA	7	E26	120	3 000	80	15 000	750	100	10/40
68947	G25/S3/7W/40K/SW/FIL/STD	NA	7	E26	120	4 000	80	15 000	750	100	10/40
<b>G30</b>											
68951	G30/7W/30K/SW/FIL/STD	NA	7	E26	120	3 000	80	15 000	800	100	10/40
<b>G40</b>											
67667	G40/S3/8.5W/27K/SW/FIL/STD	N/A	8.5	E26	120	2 700	80	15 000	800	60	5/20
<b>T9</b>											
67783	T9/S3/5W/27K/SW/FIL/STD	N/A	5	E26	120	2 700	80	15 000	500	60	1/100
68961	T9/S3/5W/30K/SW/FIL/STD	NA	5	E26	120	3 000	80	15 000	500	60	10/100

Lumen values are derived from photometric testing  
 For a complete list of compatible dimmers, please visit [www.standardpro.com](http://www.standardpro.com)







Order code	Description	Filament type	Watts (W)	Base	Volts (VAC)	Color temp. (K)	CRI	Finish	Life L70 (hrs)	Lumen output (lm)	Traditional equivalent (W)	Case qty (inner/master)
<b>A15</b>												
70310	A15/S4/4.5W/27K/V/FIL/STD	Vertical	4.5	E26	120	2 700	80	Clear	15 000	450	40	50
70311	A15/S4/4.5W/30K/V/FIL/STD	Vertical	4.5	E26	120	3 000	80	Clear	15 000	450	40	50
68935	A15/S3/5.5W/40K/V/FIL/STD	Vertical	5.5	E26	120	4 000	80	Clear	15 000	615	60	10/100
<b>A19</b>												
68936	A19/S3/4.5W/30K/O/FIL/STD	Oblique	4.5	E26	120	3 000	80	Clear	15 000	450	40	10/40
70313	A19/S4/7W/27K/S/FIL/STD	Spiral	7	E26	120	2 700	80	Clear	15 000	800	60	50
70314	A19/S4/7W/30K/S/FIL/STD	Spiral	7	E26	120	3 000	80	Clear	15 000	800	60	50
70315	A19/S4/7W/40K/S/FIL/STD	Spiral	7	E26	120	4 000	80	Clear	15 000	800	60	50
68937	A19/S3/7W/50K/S/FIL/STD	Spiral	7	E26	120	5 000	80	Clear	15 000	800	60	10/40
<b>ST17</b>												
68954	ST17/5W/27K/O/FIL/STD	Oblique	5	E26	120	2 700	80	Clear	15 000	500	60	10/40
68955	ST17/5W/30K/O/FIL/STD	Oblique	5	E26	120	3 000	80	Clear	15 000	500	60	10/40
<b>ST19</b>												
67748	ST19/S3/4.5W/27K/S/FIL/STD	Spiral	4.5	E26	120	2 700	80	Clear	15 000	450	40	10/40
67749	ST19/S3/4.5W/30K/S/FIL/STD	Spiral	4.5	E26	120	3 000	80	Clear	15 000	450	40	10/40
67750	ST19/S3/4.5W/27K/O/FIL/STD	Oblique	4.5	E26	120	2 700	80	Clear	15 000	450	40	10/40
68956	ST19/S3/4.5W/30K/O/FIL/STD	Oblique	4.5	E26	120	3 000	80	Clear	15 000	450	40	10/40
68957	ST19/S3/4.5W/40K/O/FIL/STD	Oblique	4.5	E26	120	4 000	80	Clear	15 000	450	40	10/40
70319	ST19/S4/7W/27K/V/FIL/STD	Vertical	7	E26	120	2 700	80	Clear	15 000	800	75	50
70320	ST19/S4/7W/30K/V/FIL/STD	Vertical	7	E26	120	3 000	80	Clear	15 000	800	75	50
68958	ST19/S3/7W/40K/V/FIL/STD	Vertical	7	E26	120	4 000	80	Clear	15 000	800	60	10/40
<b>ST22</b>												
68959	ST22/8.5W/30K/V/FIL/STD	Vertical	8.5	E26	120	3 000	80	Clear	15 000	1 000	150	10/40

Lumen values are derived from photometric testing  
For a complete list of compatible dimmers, please visit [www.standardpro.com](http://www.standardpro.com)



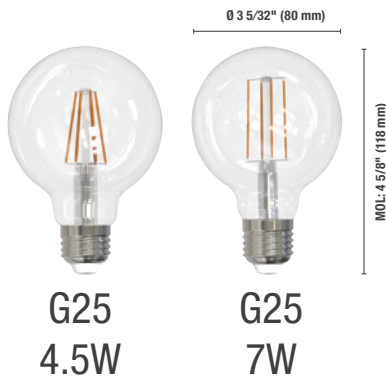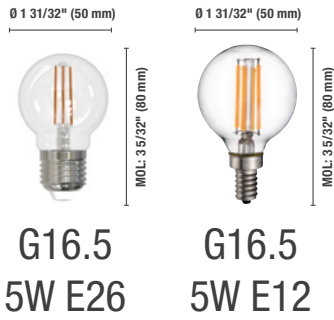

Order code	Description	Filament type	Watts (W)	Base	Volts (VAC)	Color temp. (K)	CRI	Finish	Life L70 (hrs)	Lumen output (lm)	Traditional equivalent (W)	Case qty (inner/master)
<b>G16.5</b>												
67764	G16.5/S3/5W/27K/V/FIL/STD	Vertical	5	E26	120	2 700	80	Clear	15 000	500	60	10/100
68942	G16.5/S4/5W/27K/E12/V/FIL/STD	Vertical	5	E12	120	2 700	80	Clear	15 000	500	60	10/100
68943	G16.5/S4/5W/30K/E12/V/FIL/STD	Vertical	5	E12	120	3 000	80	Clear	15 000	500	60	10/100
68944	G16.5/S4/5W/40K/E12/V/FIL/STD	Vertical	5	E12	120	4 000	80	Clear	15 000	500	60	10/100
<b>G25</b>												
67663	G25/S3/4.5W/27K/O/FIL/STD	Oblique	4.5	E26	120	2 700	80	Clear	15 000	450	40	10/40
68948	G25/S3/4.5W/30K/O/FIL/STD	Oblique	4.5	E26	120	3 000	80	Clear	15 000	450	40	10/40
67664	G25/S3/7W/27K/V/FIL/STD	Vertical	7	E26	120	2 700	80	Clear	15 000	800	100	10/40
68949	G25/S3/7W/30K/V/FIL/STD	Vertical	7	E26	120	3 000	80	Clear	15 000	800	100	10/40
68950	G25/S3/7W/40K/V/FIL/STD	Vertical	7	E26	120	4 000	80	Clear	15 000	800	100	10/40
<b>G30</b>												
68952	G30/5W/27K/O/FIL/STD	Oblique	5	E26	120	2 700	80	Clear	15 000	500	60	10/40
68953	G30/5W/30K/O/FIL/STD	Oblique	5	E26	120	3 000	80	Clear	15 000	500	60	10/40
<b>G40</b>												
67666	G40/S3/4.5W/27K/O/FIL/STD	Oblique	4.5	E26	120	2 700	80	Clear	15 000	450	40	5/20

Lumen values are derived from photometric testing  
 For a complete list of compatible dimmers, please visit [www.standardpro.com](http://www.standardpro.com)








**B11**  
**2.5W**



**B11**  
**5W**



**B11**  
**4.5W S4**



**B11**  
**4W**




**CA11**




**HX5.5**



**T6 S4**



**T9**

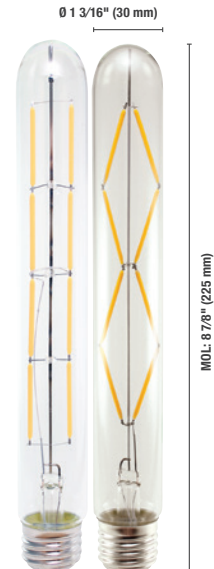

**T10**  
**Long Life**

Order code	Description	Filament type	Watts (W)	Base	Volts (VAC)	Color temp. (K)	CRI	Finish	Life L70 (hrs)	Lumen output (lm)	Traditional equivalent (W)	Case qty (inner/master)
<b>B11</b>												
70322	B11/S4/2.5W/27K/E12/V/FIL/STD	Vertical	2.5	E12	120	2 700	80	Clear	15 000	250	25	50
70323	B11/S4/2.5W/30K/E12/V/FIL/STD	Vertical	2.5	E12	120	3 000	80	Clear	15 000	250	25	50
70324	B11/S4/3.5W/27K/V/FIL/STD	Vertical	3.5	E26	120	2 700	80	Clear	15 000	350	25	50
70325	B11/S4/3.5W/30K/V/FIL/STD	Vertical	3.5	E26	120	3 000	80	Clear	15 000	350	25	50
70328	B11/S4/4.5W/27K/E12/V/FIL/STD	Vertical	4.5	E12	120	2 700	80	Clear	15 000	500	40	50
70329	B11/S4/4.5W/30K/E12/V/FIL/STD	Vertical	4.5	E12	120	3 000	80	Clear	15 000	500	40	50
70330	B11/S4/4.5W/40K/E12/V/FIL/STD	Vertical	4.5	E12	120	4 000	80	Clear	15 000	500	40	50
70331	B11/S4/4.5W/50K/E12/V/FIL/STD	Vertical	4.5	E12	120	5 000	80	Clear	15 000	500	40	50
<b>CA11</b>												
69164	LED/CA11/S3/4.5W/27K/E12/V/FIL/STD	Vertical	4.5	E12	120	2 700	80	Clear	15 000	450	40	100
<b>T6</b>												
70332	T6/S4/4.5W/27K/E12/V/FIL/STD	Vertical	4.5	E12	120	2 700	80	Clear	15 000	450	40	50
70333	T6/S4/4.5W/30K/E12/V/FIL/STD	Vertical	4.5	E12	120	3 000	80	Clear	15 000	450	40	50
68960	T6/S3/4.5W/40K/E12/V/FIL/STD	Vertical	4.5	E12	120	4 000	80	Clear	15 000	450	40	25/200
<b>T9</b>												
67782	T9/S3/5W/27K/O/FIL/STD	Oblique	5	E26	120	2 700	80	Clear	15 000	500	60	100
67784	T9/S3/5W/30K/O/FIL/STD	Oblique	5	E26	120	3 000	80	Clear	15 000	500	60	100
<b>T10</b>												
64520 <sup>2</sup>	LED/T10/6W/27K/LL/V/FIL/STD	Vertical	6	E26	120	2 700	95	Clear	25 000	600	60	50/100
64522 <sup>2</sup>	LED/T10/6W/27K/LL/Z/FIL/STD	Zig-Zag	6	E26	120	2 700	95	Clear	25 000	600	60	50/100
<b>HX5.5</b>												
68962	HX5.5/4W/27K/E12/V/FIL/STD	Vertical	4	E12	120	2 700	80	Clear	15 000	375	40	25/100
68963	HX5.5/4W/30K/E12/V/FIL/STD	Vertical	4	E12	120	3 000	80	Clear	15 000	400	40	25/100

Lumen values are derived from photometric testing  
For a complete list of compatible dimmers, please visit [www.standardpro.com](http://www.standardpro.com)







**A19**  
**7 W**



**ST19**  
**4.5 W**



**G40**

Order code	Description	Filament type	Watts (W)	Base	Volts (VAC)	Color temp. (K)	CRI	Finish	Life L70 (hrs)	Lumen output (lm)	Traditional equivalent (W)	Case qty (inner/master)
<b>Victorian Style</b>												
<b>A19</b>												
67767	A19/S3/7W/22K/A/S/FIL/STD	Spiral	7	E26	120	2 200	80	Amber	15 000	650	40	10/40
<b>ST19</b>												
67768	ST19/S3/4.5W/22K/A/O/FIL/STD	Oblique	4.5	E26	120	2 200	80	Amber	15 000	380	40	40
<b>G40</b>												
67668	G40/S3/4.5W/22K/A/O/FIL/STD	Oblique	4.5	E26	120	2 200	80	Amber	15 000	380	40	5/20


Lumen values are derived from photometric testing  
For a complete list of compatible dimmers, please visit [www.standardpro.com](http://www.standardpro.com)








B11

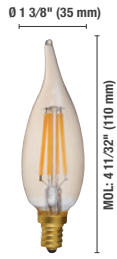

CA11



T14  
Longue vie

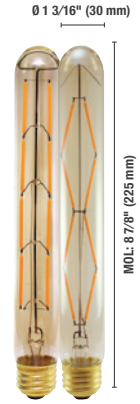


T10  
Longue vie

Order code	Description	Filament type	Watts (W)	Base	Volts (VAC)	Color temp. (K)	CRI	Finish	Life L70 (hrs)	Lumen output (lm)	Traditional equivalent (W)	Case qty (inner/master)
<b>Victorian Style</b>												
<b>B11</b>												
67758	B11/S3/3.6W/22K/A/E12/V/FIL/STD	Vertical	3.6	E12	120	2 200	80	Amber	15 000	320	40	100
<b>CA11</b>												
67761	CA11/S3/4.5W/22K/A/E12/V/FIL/STD	Vertical	4.5	E12	120	2 200	80	Amber	15 000	350	40	10/100
<b>T14</b>												
64529 <sup>2</sup>	LED/T14/6W/22K/LL/A/S/FIL/STD	Spiral	6	E26	120	2 200	95	Amber	25 000	450	40	50/100
<b>T10</b>												
64521 <sup>2</sup>	LED/T10/6W/22K/LL/AV/FIL/STD	Vertical	6	E26	120	2 200	95	Amber	25 000	450	40	50/100
64523 <sup>2</sup>	LED/T10/6W/22K/LL/A/Z/FIL/STD	Zig-Zag	6	E26	120	2 200	95	Amber	25 000	450	40	50/100

Lumen values are derived from photometric testing  
For a complete list of compatible dimmers, please visit [www.standardpro.com](http://www.standardpro.com)



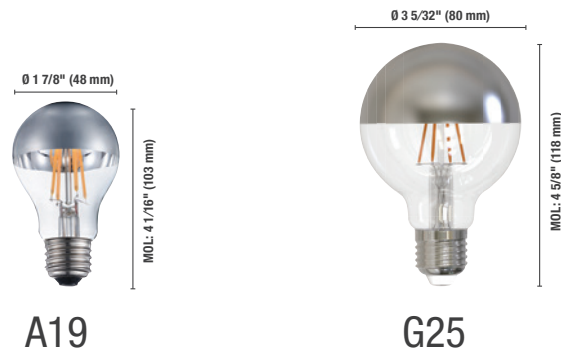

A19

G25

Order code	Description	Filament type	Watts (W)	Base	Volts (VAC)	Color temp. (K)	CRI	Life L70 (hrs)	Lumen output (lm)	Traditional equivalent (W)	Case qty (inner/master)
<b>Half Mirror</b>											
<b>A19</b>											
65821	LED/A19/S2/4W/27K/HM/O/FIL/STD	Oblique	4	E26	120	2 700	80	15 000	360	40	10/50
<b>G25</b>											
67661	G25/S3/4.5W/27K//HM/O/FIL/STD	Vertical	4.5	E26	120	2 700	80	15 000	380	40	10/40

Lumen values are derived from photometric testing  
For a complete list of compatible dimmers, please visit [www.standardpro.com](http://www.standardpro.com)


6  
damp  
location

dimnable


enclosed  
fixture

3  
yrs  
warranty



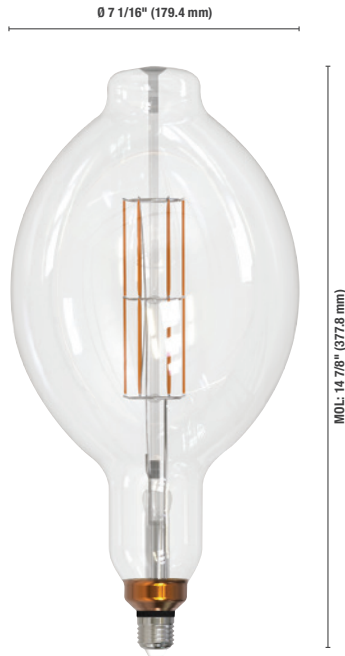

BT56

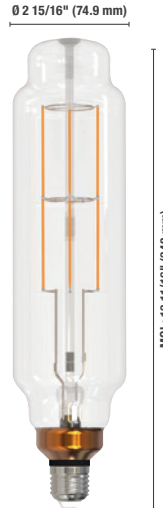

TT24

Order code	Description	Filament type	Watts (W)	Base	Volts (VAC)	Color temp. (K)	CRI	Life L70 (hrs)	Lumen output (lm)	Traditional equivalent (W)	Case qty (master)
<b>Large Filament</b>											
<b>BT56</b>											
67321	BT56/8W/27K/V/FIL/STD	Vertical	8	E26	120	2 700	80	15 000	900	60	4
<b>TT24</b>											
67323	TT24/8W/27K/V/FIL/STD	Vertical	8	E26	120	2 700	80	15 000	900	60	4

Lumen values are derived from photometric testing  
 For a complete list of compatible dimmers, please visit [www.standardpro.com](http://www.standardpro.com)

6  
damp  
location

dim<sup>able</sup>

2<sup>yrs</sup>  
warranty

