




# LED HIGH BAY LUMINAIRES



**STANPRO**

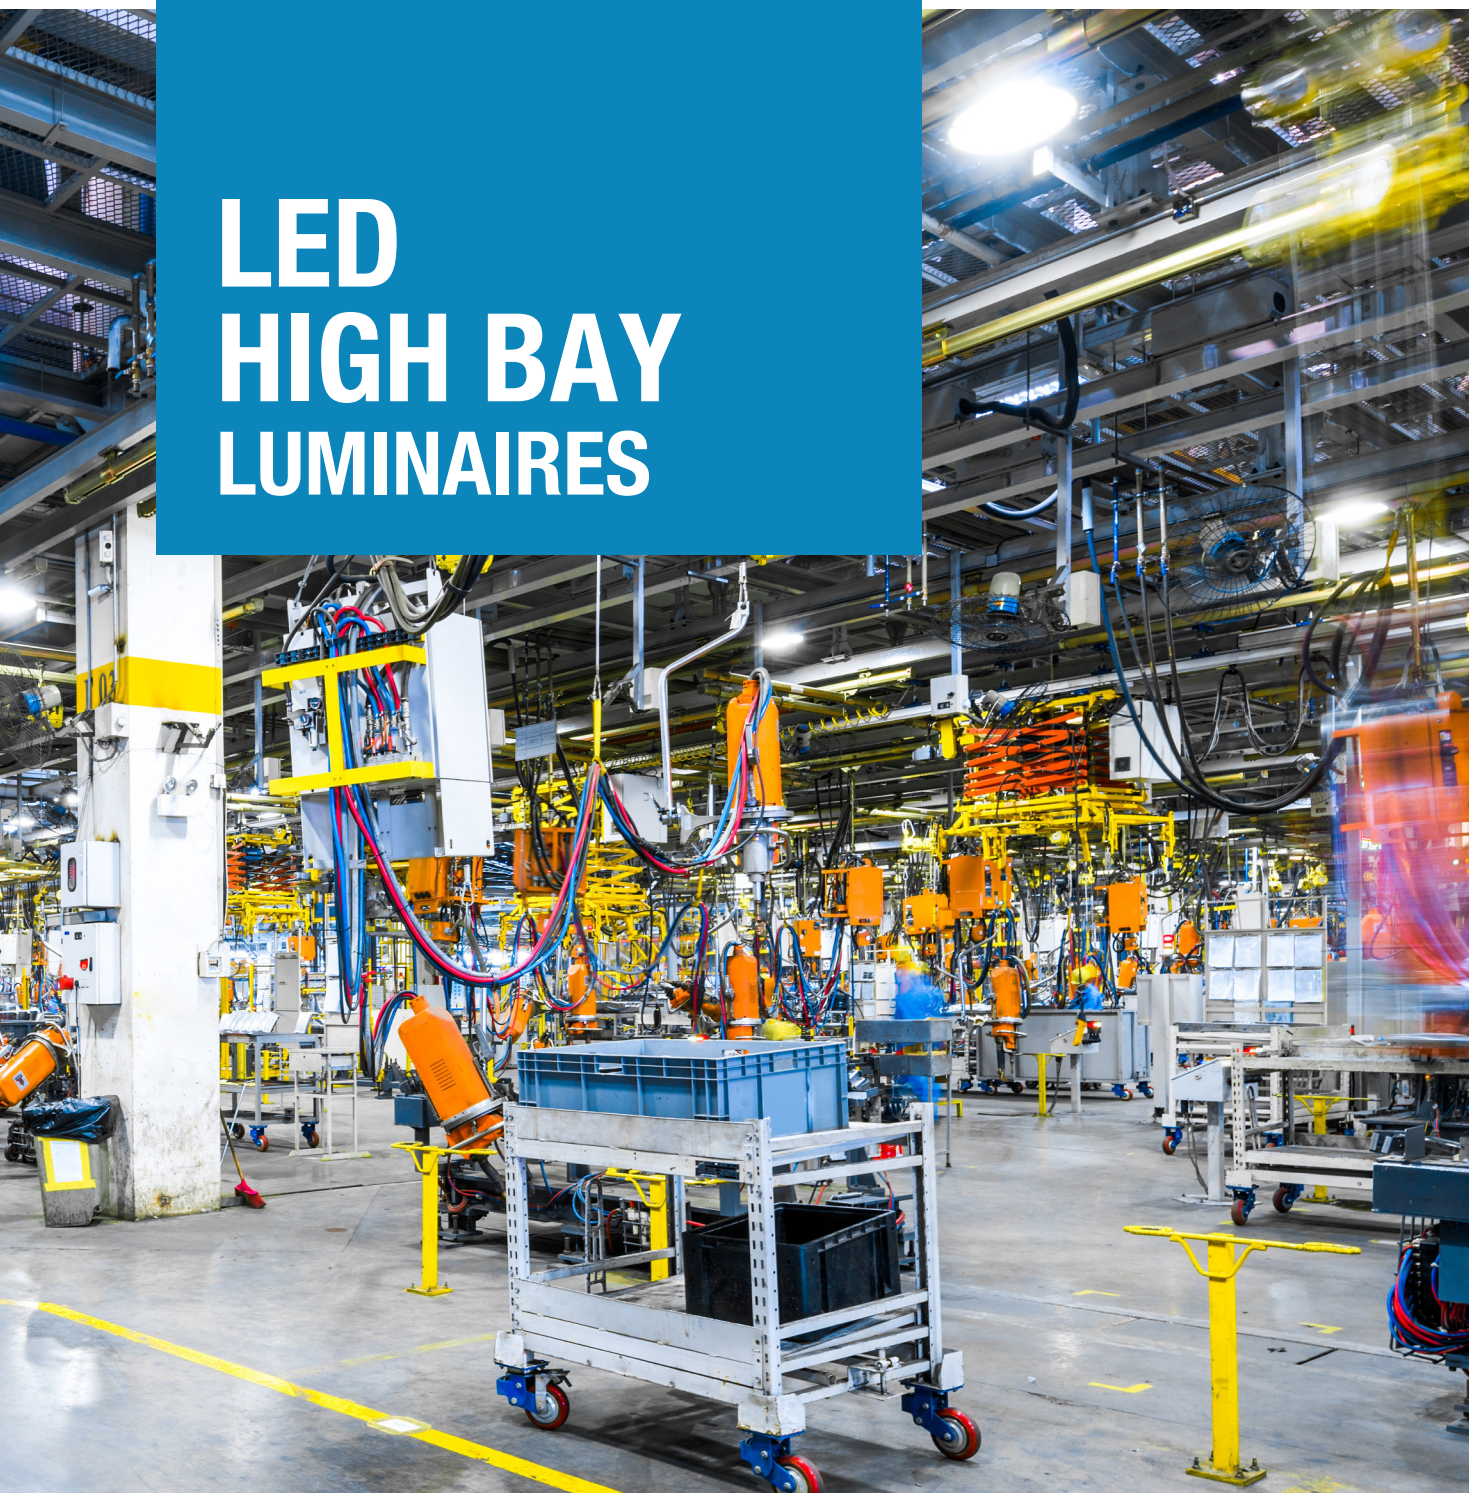





# TABLE OF CONTENTS

	<b>HRV CHOICE</b> ROUND ECONOMIC AND HIGH PERFORMING LUMINAIRE	Quick Ship ⌚	<i>04</i>
	<b>L1RVH CHOICE</b> ROUND ECONOMIC AND HIGH PERFORMING LUMINAIRE	Quick Ship ⌚	<i>08</i>
<b>ROUND LED HIGH BAY</b>	<b>L1RUH</b> ROUND ECONOMIC AND HIGH PERFORMING LUMINAIRE	Quick Ship ⌚	<i>12</i>
	<b>L1RSH</b> ROUND ECONOMIC AND HIGH PERFORMING LUMINAIRE	Quick Ship ⌚	<i>16</i>
	<b>L1LEH GEN. 2</b> ECONOMICAL AND HIGH-PERFORMING LED LINEAR HIGH BAY LUMINAIRE	Quick Ship ⌚	<i>21</i>
<b>LINEAR LED HIGH BAY</b>	<b>L1LEH GEN. 1</b> ECONO LED LINEAR HIGH BAY LUMINAIRE	Quick Ship ⌚	<i>25</i>




# HRV CHOICE

## ROUND ECONOMIC AND HIGH PERFORMING LUMINAIRE

3 CCT AND 3 POWER SELECTABLE FEATURES

### DESCRIPTION

An economical and energy efficient LED High Bay series with a simple, yet refined design. This type of luminaire is ideal for any application such as warehouses, manufacturing facilities, sports arenas, and other large high ceiling indoor applications. The IP65 rating allows this fixture to be installed where dust and water spray may be present.

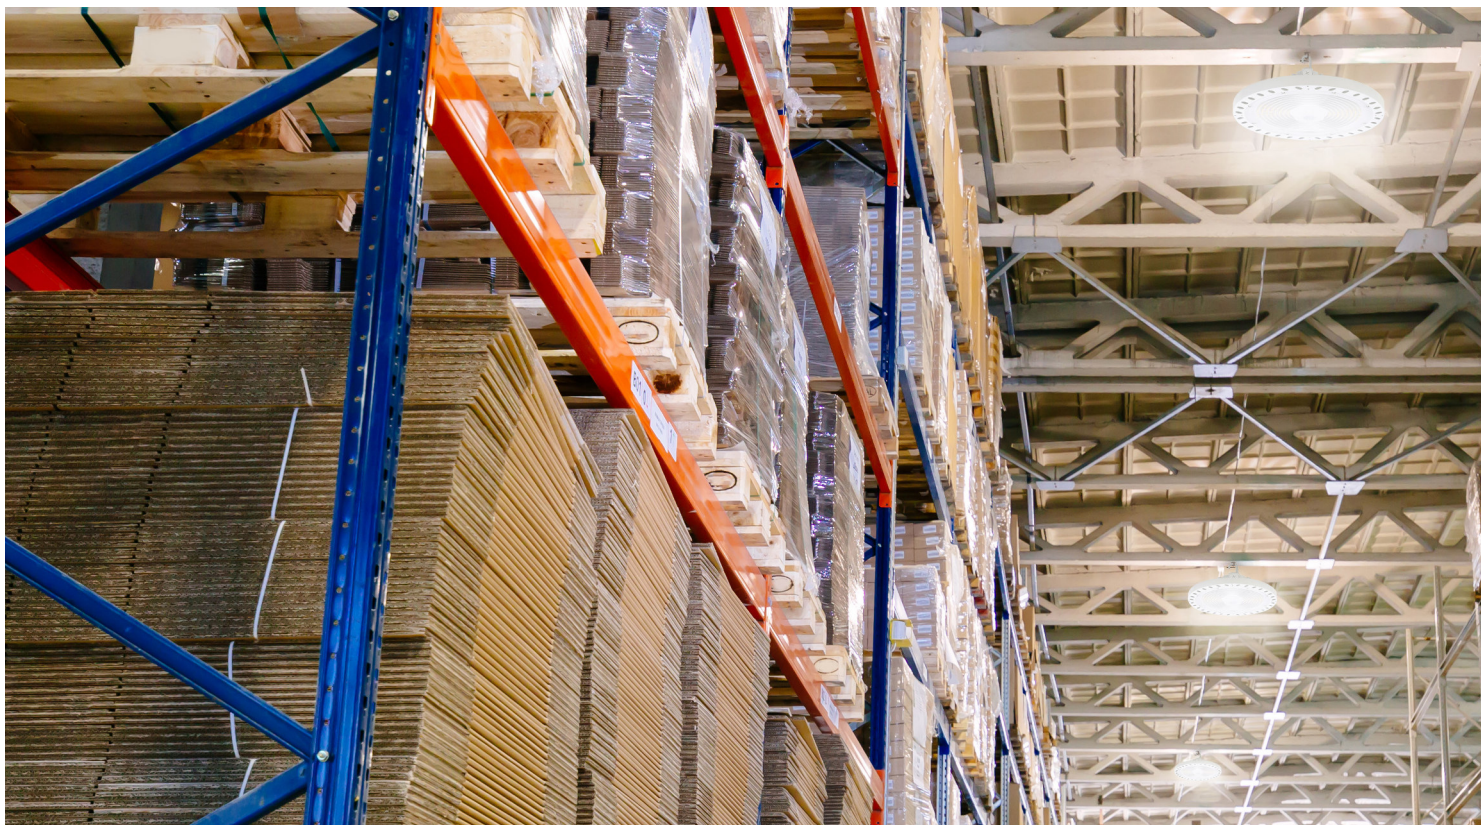




## FEATURES

- 10' power and dimming cables included with all configurations
- Pure light aluminum housing
- 11"-15.4" diameter
- Clear PC lens over LEDs
- 15 333 – 45 316 lm
- 138 - 178 lm/W
- CCT and Power Selectable
- 120-347 V
- 80+ CRI
- 0-10 V dimming driver (dimming cables included with this luminaire)
- 6 kV surge protection
- Operating temperature: -40°C to +50°C
- Estimated lifespan of over 102 000 hours to L70
- NEMA 4X and NSF certified



## COLOR TEMPERATURE



## FIXTURE COLOR

- ☒ Black
 ☐ White

## ACCESSORIES AND OPTIONS

Aluminum reflector and clear polycarbonate reflector, polycarbonate reflector cover, junction box adapter, trunnion, wireguards, external Bluetooth Mesh PIR sensor, external high frequency sensor kit, external PIR sensor kit, remote control for motion sensors, Emergency back-up, EM back-up remote control

## MOUNTING OPTIONS

Hook mount standard. The hook is removable for 1/2' NPT conduit mounting. For additional security, use the safety cable accessory. A trunnion ( $\pm 90^\circ$ ) is also available for yoke bracket surface mounting




Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at [www.designlights.org/search](http://www.designlights.org/search).



# HRV CHOICE

## ROUND ECONOMIC AND HIGH PERFORMING LUMINAIRE

3 CCT AND 3 POWER SELECTABLE FEATURES

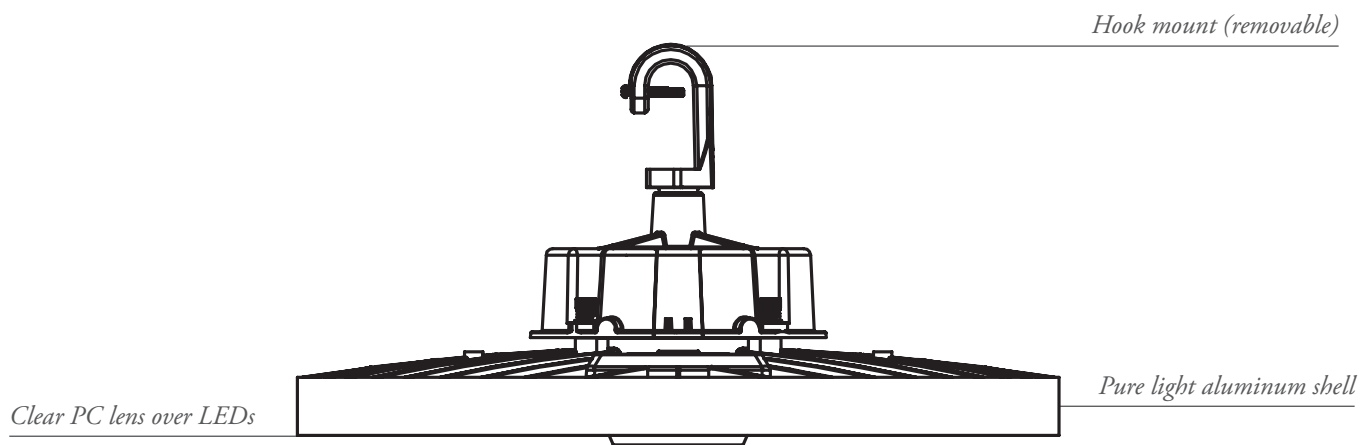


### ACCESSORIES (sold separately)






## DIMENSIONS


*100/120/150 W*

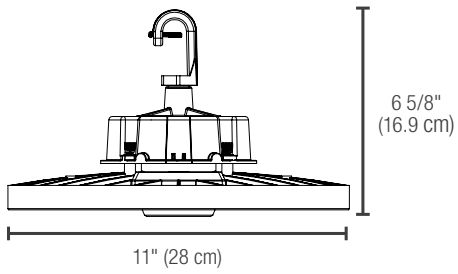

*150/180/200 W*  
*150/200/240 W*

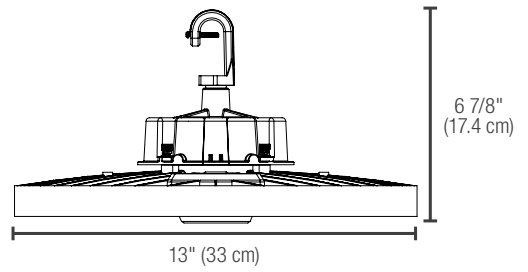

*240/270/300 W*

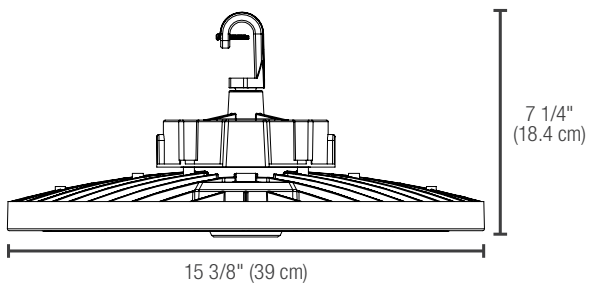



# L1RVH CHOICE

## ROUND ECONOMIC AND HIGH PERFORMING LUMINAIRE

3 CCT AND POWER SELECTABLE FEATURES

### DESCRIPTION

An economical and energy efficient LED High Bay series with a simple, yet refined design. This type of luminaire is ideal for any application such as warehouses, manufacturing facilities, sports arenas, and other large high ceiling indoor applications. The IP65 rating allows this fixture to be installed where dust and water spray may be present.



69428 / 69746



69560



69429






## FEATURES

- 10' power and dimming cables included with all configurations
- Pure light aluminum housing
- 11.75" – 13.75" diameter
- Clear PC lens over LEDs
- 13 663 – 38 345 lm
- 149 lm/W - 170 lm/W
- CCT and Power Selectable
- 120-347 V
- 80+ CRI
- 0-10 V dimming driver (dimming cables included with this luminaire)
- 6 kV surge protection
- Operating temperature: -40°C to +50°C
- Estimated lifespan of over 100 000 hours to L70
- NEMA 4X and NSF certified

## COLOR TEMPERATURE



## FIXTURE COLOR

- ☒ Black
 ☐ White

## ACCESSORIES AND OPTIONS

Aluminum reflector and clear polycarbonate reflector, polycarbonate reflector cover, junction box adapter, 120° beam angle lens, trunnion, wireguards, external Bluetooth® Mesh PIR sensor, external high frequency sensor kit, external PIR sensor kit, remote control for motion sensors, Emergency back-up, EM back-up remote control

## MOUNTING OPTIONS

Hook mount standard. The hook is removable for 1/2' NPT conduit mounting. For additional security, use the safety cable accessory. A trunnion ( $\pm 90^\circ$ ) is also available for yoke bracket surface mounting




Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at [www.designlights.org/search](http://www.designlights.org/search).


# L1RVH CHOICE

ROUND ECONOMIC AND HIGH  
PERFORMING LUMINAIRE

3 CCT AND POWER SELECTABLE  
FEATURES

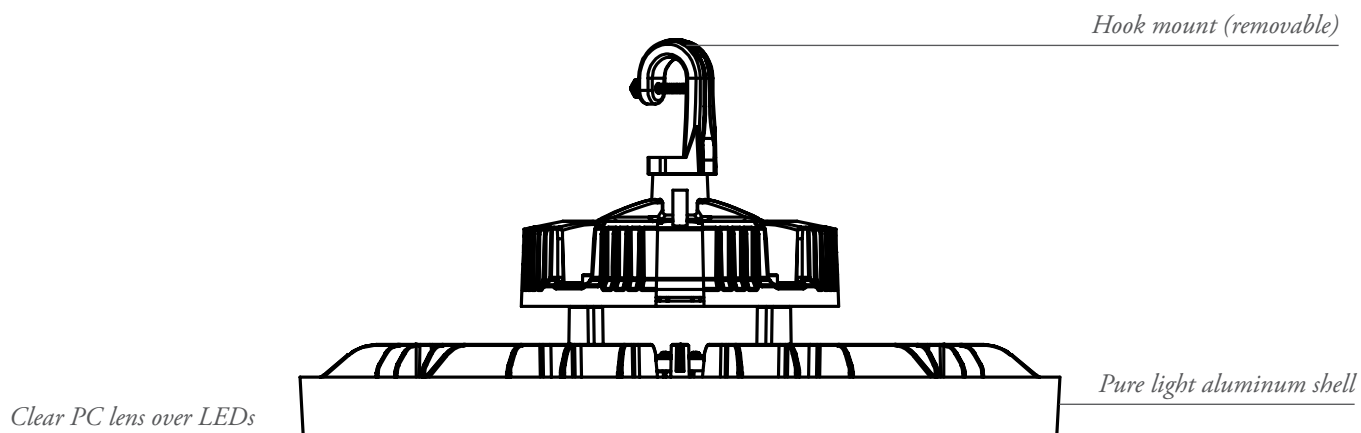


## ACCESSORIES (sold separately)

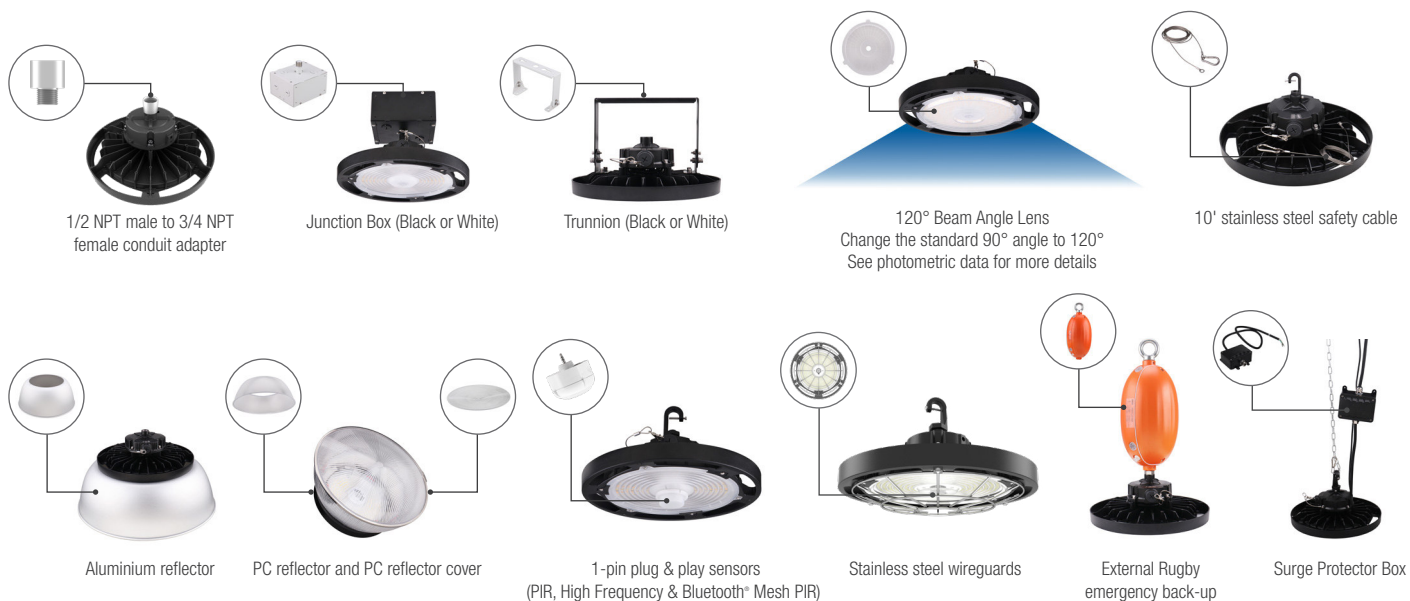




## DIMENSIONS

*100/120/150 W*  
*130/150/180 W*

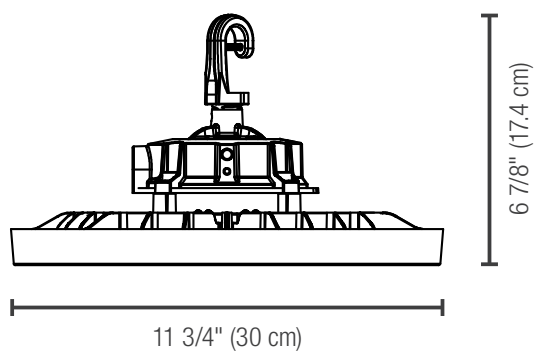

*200/240 W*

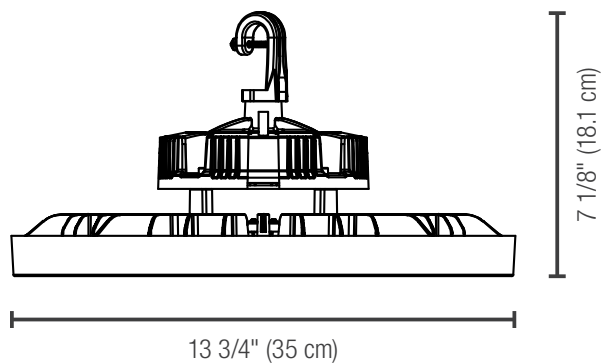



# L1RUH

## ROUND ECONOMIC AND HIGH PERFORMING LUMINAIRE INTEGRATED SENSOR

### DESCRIPTION


Our economic series of LED High Bays are an energy efficient solution with a simple design. This type of luminaire is ideal for any application such as warehouses, manufacturing facilities, sports arenas, and other large high ceiling indoor applications. The IP65 rating allows this fixture to be installed where dust and water spray may be present. Meets NEMA 4X and NSF.



100-150 W



200-240 W

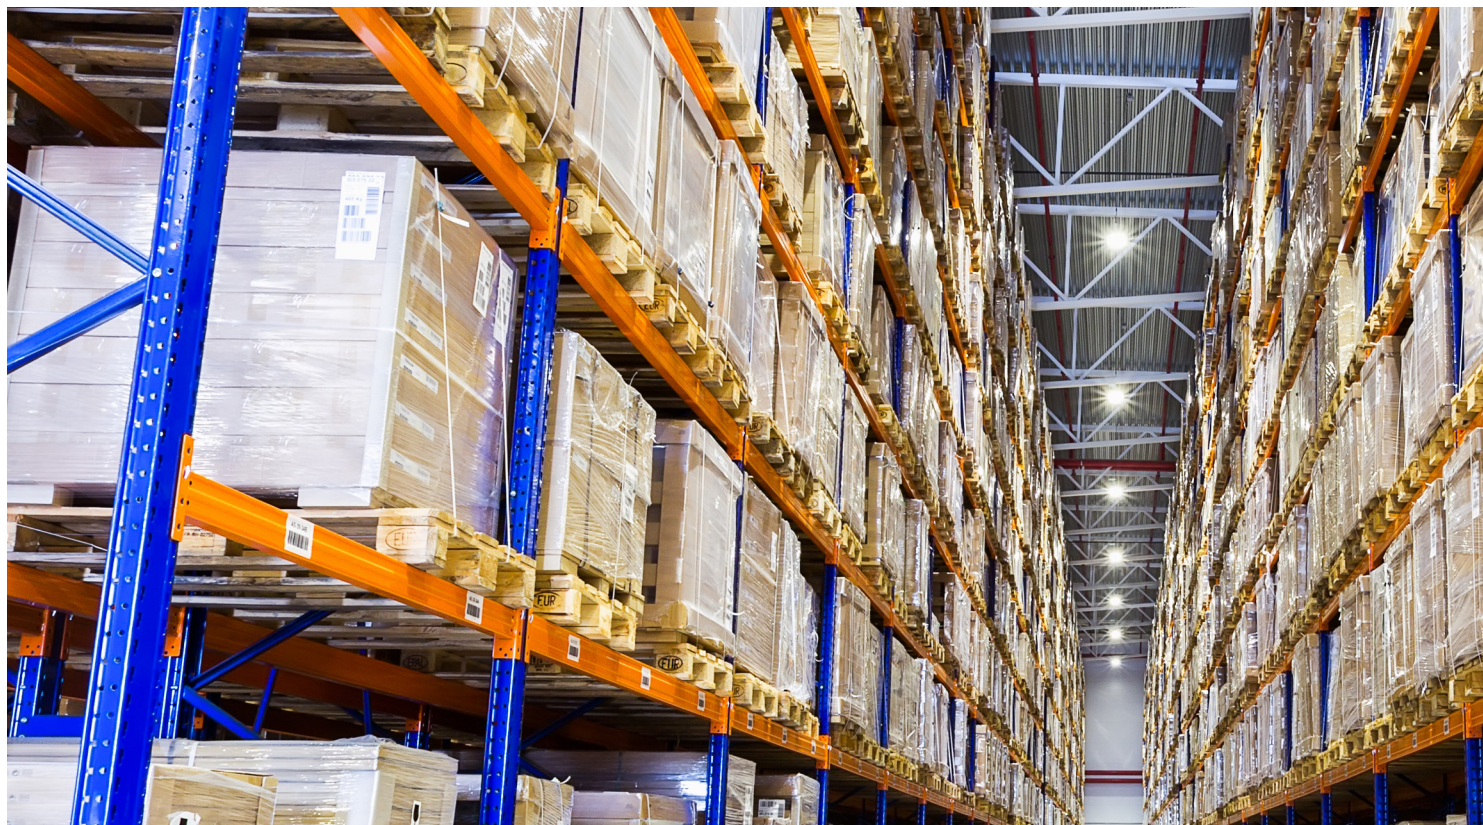




## FEATURES

- 10' power and dimming cables included with all configurations
- Pure light aluminum housing
- 12.6" - 14.76" diameter
- Clear PC lens over LEDs
- 13 465 - 37 376 lm
- 133 - 154 lm/W
- 120-277V
- 80+ CRI
- 0-10 V dimming standard
- 4 kV surge protection
- Ambient temperature from -40°C to +50°C
- Estimated lifespan of over 54 000 hours to L70
- Meets NSF / NEMA 4X

## COLOR TEMPERATURE



## FIXTURE COLOR

■ Black

## ACCESSORIES AND OPTIONS

Aluminum reflector and Clear polycarbonate reflector, Junction box adapter, trunnion, external high frequency sensor kit, external pir sensor kit, Remote control for motion sensors, Emergency back-up, EM back-up remote control

## MOUNTING OPTIONS


Hook mount standard. The hook is removable for 1/2" NPT conduit mounting. For additional security, use the safety cable accessory. A trunnion ( $\pm 90^\circ$ ) is also available for yoke bracket surface mounting.



Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at [www.designlights.org/search](http://www.designlights.org/search).

# L1RUH

ROUND ECONOMIC AND  
HIGH PERFORMING LUMINAIRE  
INTEGRATED SENSOR

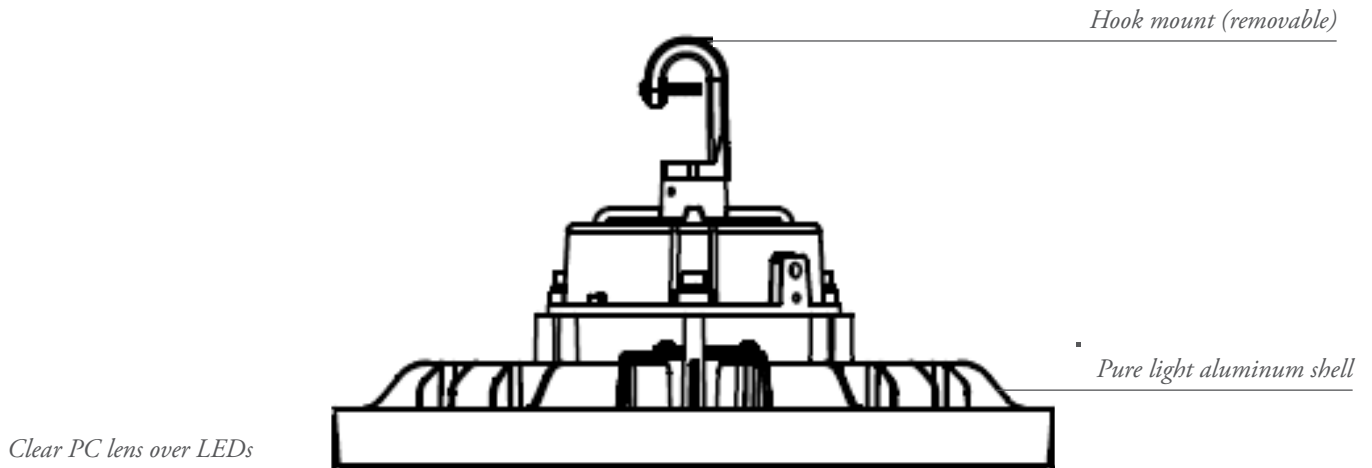

- 10' power and dimming cables included with all configurations
- Rated IP65 to prevent it from dust, wet or damp factors
- Surge protection 4 kV


## AVAILABLE REFLECTORS






## DIMENSIONS

*100-150 W*

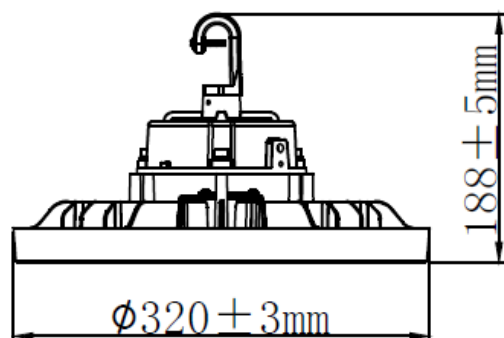

*200-240 W*

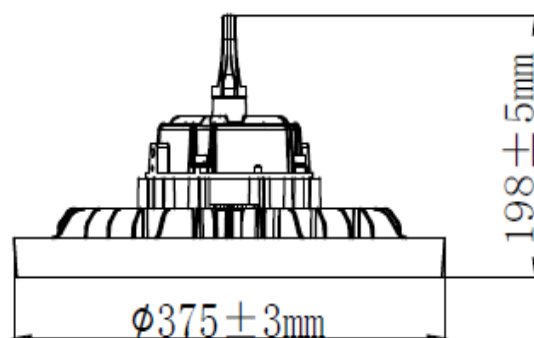


---

# L1RSH

## ROUND ECONOMIC AND HIGH PERFORMING LUMINAIRE

### DESCRIPTION

Our economic series of LED High Bays are an energy efficient solution with a simple design. This type of luminaire is ideal for any application such as stockrooms, manufacturing, sports arenas, and other large high ceiling indoor applications. The IP65 rating allows this fixture to be installed where dust and water spray may be present.

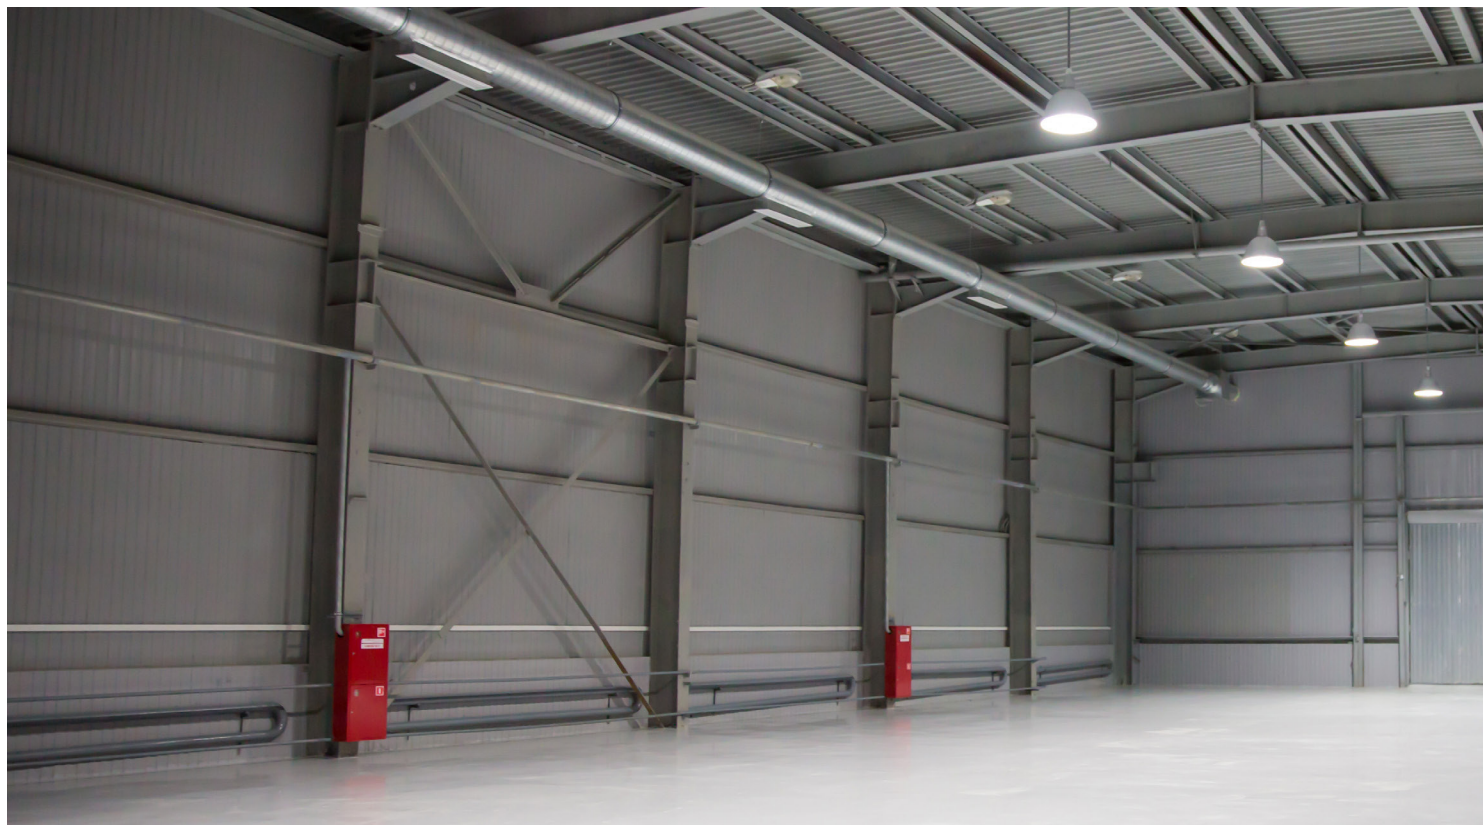




## FEATURES

- 10' power and dimming cables included with all configurations
- Pure light aluminum shell
- 9.4" - 12.0" diameter
- Clear polycarbonate lens over LEDs
- 15 147 lm - 37 911 lm
- Efficacy from 133lm/W - 163lm/W
- 120-277 V, 347 V
- 80+ CRI
- Ambient temperature: 40°C TO +45°C
- Life L70: 151 000 hours
- Color temperatures: 4 000 K, 5 000 K

## COLOR TEMPERATURE



## FIXTURE COLOR

- Black

## ACCESSORIES AND OPTIONS

Aluminum reflector, clear polycarbonate reflector, high frequency sensor, trunnion ( $\pm 90^\circ$ ), safety cable.


## MOUNTING OPTIONS

Hook mount standard. The hook is removable for  $\frac{1}{2}$ " NPT conduit mounting. For additional security, use the safety cable accessory. A trunnion ( $\pm 90^\circ$ ) is also available for yoke bracket surface mounting.



# L1RSH

## ROUND ECONOMIC AND HIGH PERFORMING LED HIGH BAY

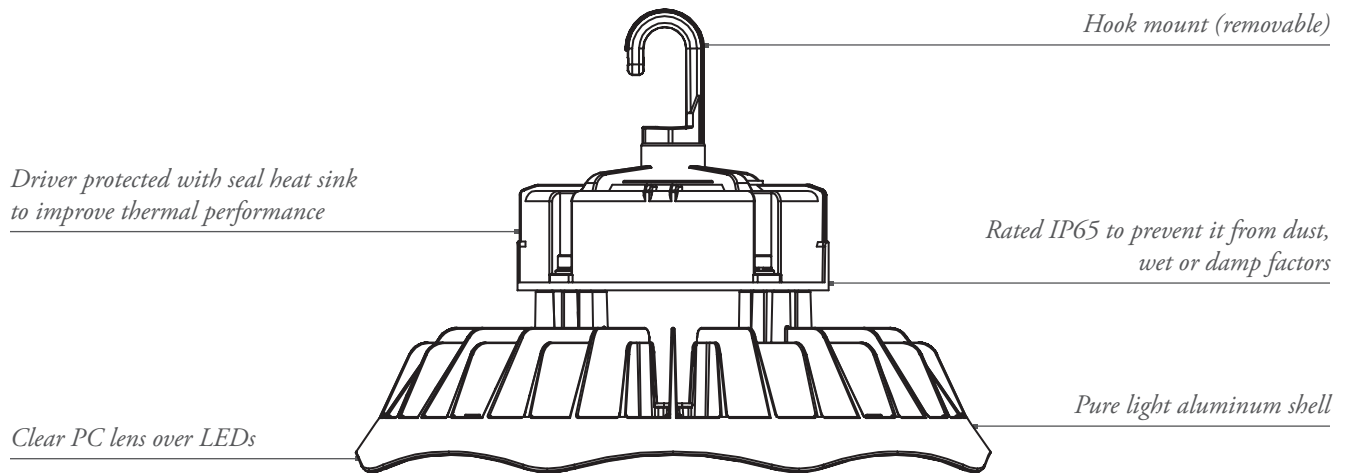



- 10' power and dimming cables included with all configurations
- Standard 110° beam angle







## DIMENSIONS




*S1 – 120-277 V et 347 V*



*S2-S3 – 120-277 V et 347 V*




*S4 – 120-277 V et 347 V*

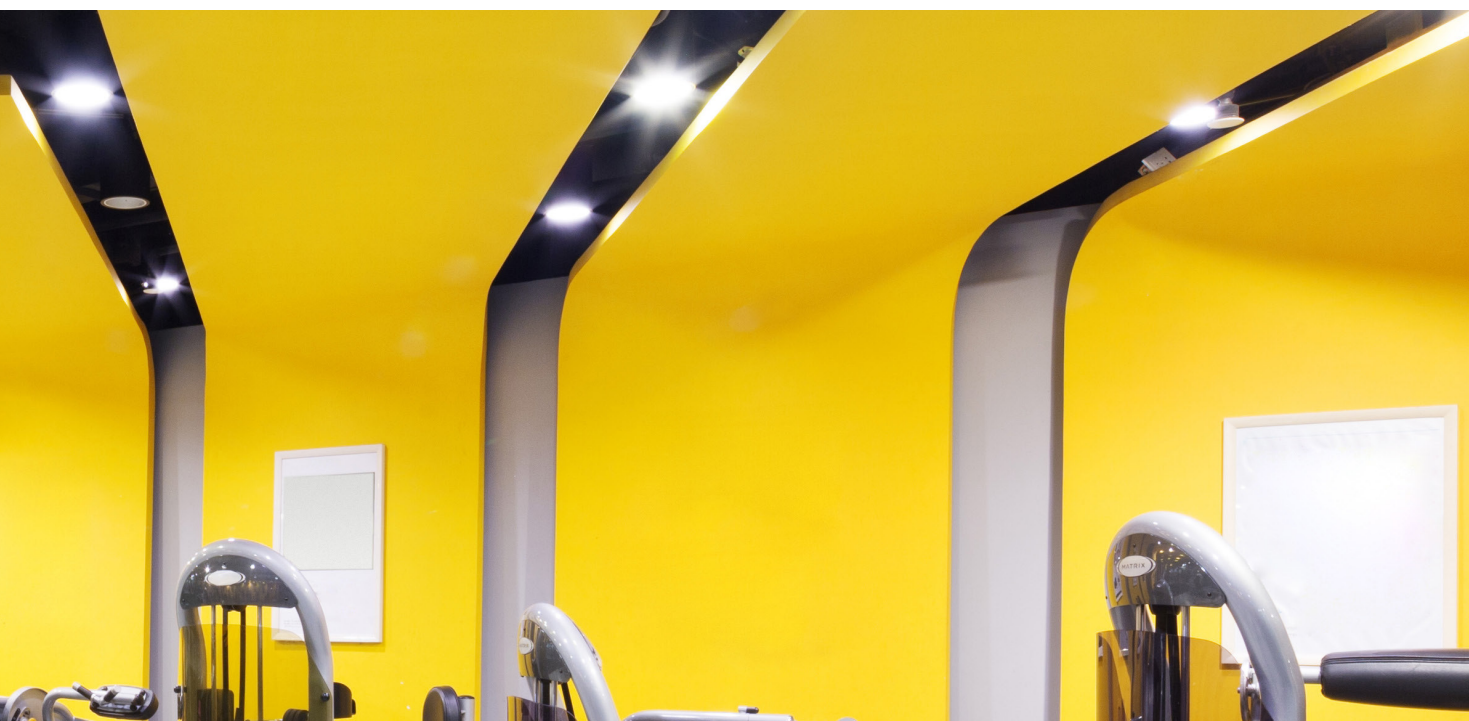







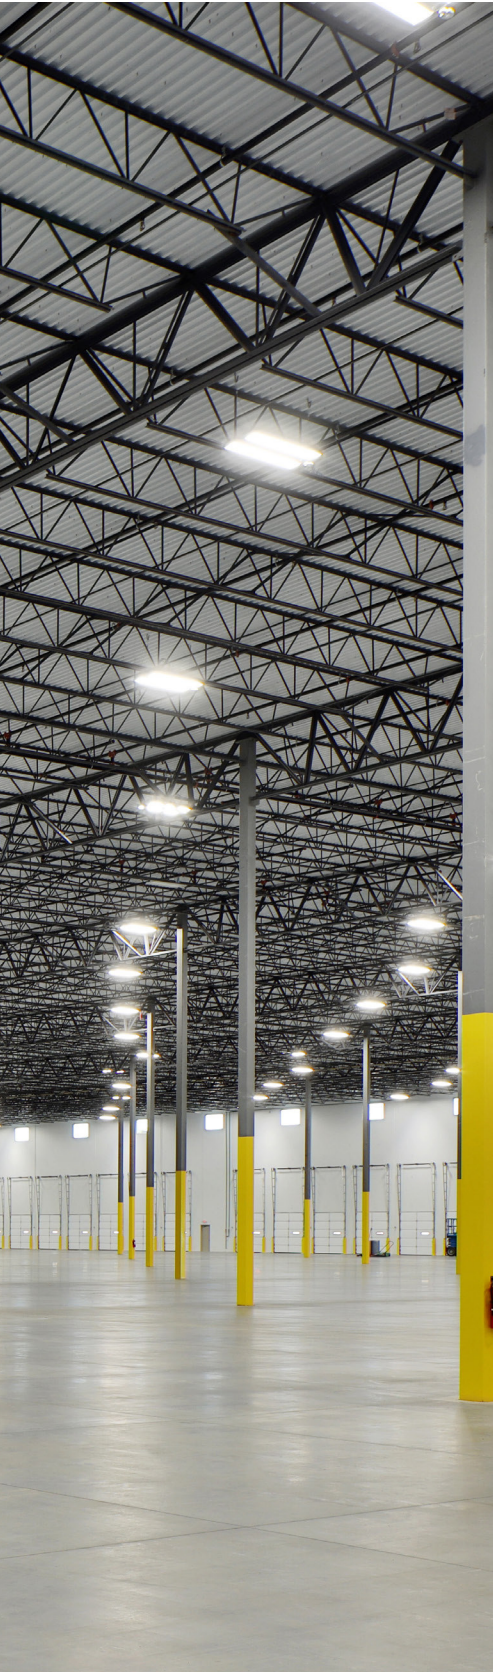

# L1LEH GEN. 2

## ECONOMICAL AND HIGH-PERFORMING LED LINEAR HIGH BAY LUMINAIRE

3 CCT AND 3 POWER  
SELECTABLE FEATURES WITH  
SENSOR RECEPTACLE

### DESCRIPTION

Stanpro's economic L1LEH Linear High Bay with integrated receptacle for smart and non smart sensors, is ideally suited for high ceiling warehouses as well as arenas where uniform and efficient lighting is required.



24"



48"

# L1LEH GEN. 2


## ECONOMICAL AND HIGH-PERFORMING LED LINEAR HIGH BAY LUMINAIRE

### 3 CCT AND 3 POWER SELECTABLE FEATURES WITH SENSOR RECEPTACLE

#### FEATURES

- White powder coated 22 gauge slim, lightweight steel housing
- Frosted polycarbonate lens
- 6' power cord and dimming cables included with all configurations
- 0-10 V dimming driver
- 12 800 - 100 000 lm
- up to 170 lm/W
- 120-347 V
- 80+ CRI
- 6 kV surge protection
- Operating temperature: From -20°C (-4°F) and up to 65°C (149°F) on certain wattages. Consult Lumen and Operating Temperature Specification Table for more details
- Estimated lifespan of over 54 000 hours to L70

#### COLOR TEMPERATURE



#### FIXTURE COLOR

☐ White

#### ACCESSORIES AND OPTIONS

V-Hooks, Chain kits, Surface mount brackets, Conduit mount kit, Wireguard, external Bluetooth® Mesh PIR sensor, external High Frequency sensor kit, external PIR sensor kit, remote control for non-smart sensors

#### MOUNTING OPTIONS

Surface, suspended or pendant. Set of 2 V-Hooks and chains are provided with all configurations. Other mounting options are available, please consult accessory table.



To view our DLC qualified products, please consult the DLC Qualified Products List at [www.designlights.org/search](http://www.designlights.org/search).



# L1LEH GEN. 2


## ECONOMICAL AND HIGH-PERFORMING LED LINEAR HIGH BAY LUMINAIRE

3 CCT AND 3 POWER  
SELECTABLE FEATURES WITH  
SENSOR RECEPTACLE

*Well ventilated driver compartment for optimal thermal management.*

*White powder coated 22 gauge slim, lightweight steel housing.*

*Frosted polycarbonate lens*

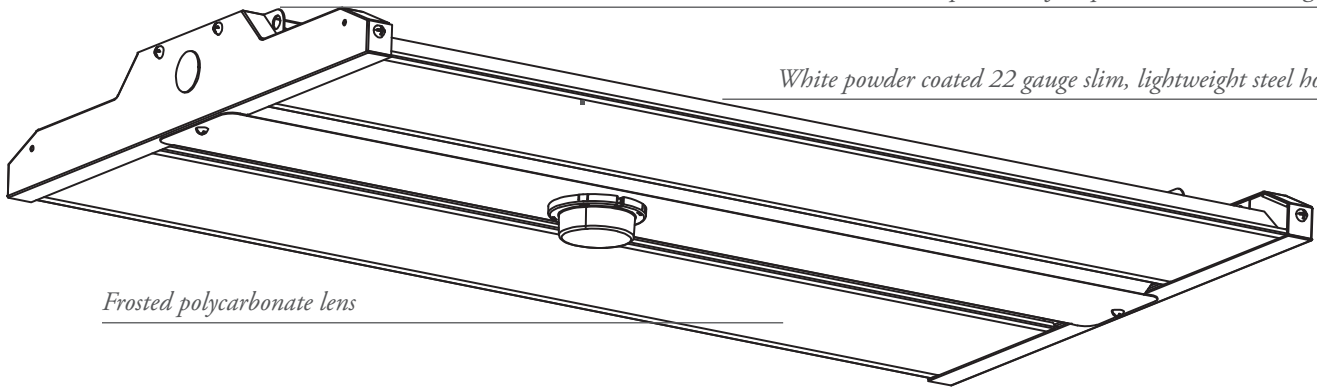


- 6' power cord and dimming cables included with all configurations
- Surge protection 6 kV

### ACCESSORIES (sold separately)




Surface mount bracket




Conduit mount kit



Wireguards







1-pin plug & play sensors  
(PIR, High Frequency & Bluetooth® Mesh PIR)



Surge Protector Box

### DIMENSIONS

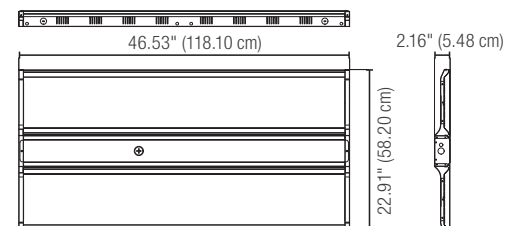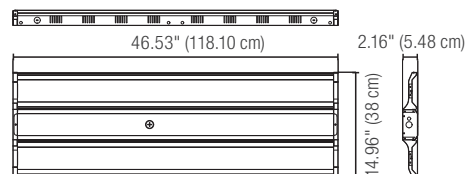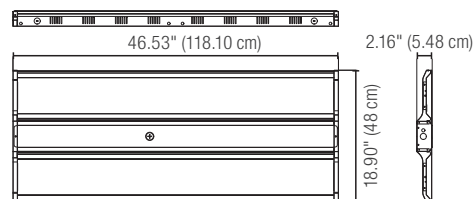







---

# L1LEH GEN. 1

**ECONO LED LINEAR HIGH  
BAY LUMINAIRE**  
MULTI-VOLTAGE  
(120-347 V)

## DESCRIPTION

Stanpro's economic L1LEH Linear High Bay with optional integrated sensor, is ideally suited for high ceiling warehouses as well as arenas where uniform and efficient lighting is required.



# L1LEH GEN. 1

## ECONO LED LINEAR HIGH BAY LUMINAIRE

MULTI-VOLTAGE  
(120-347 V)


### FEATURES

- White powder coated 22 gauge slim, lightweight steel housing.
- Well ventilated driver compartment for optimal thermal management.
- Frosted PMMA lens over LEDs provides a diffused light distribution.
- 6' power cable included with all configurations
- 11 475 - 54 000 lm
- 135 lm/W
- 120-347 V
- 80+ CRI
- 2.0 kV surge protection
- Ambient temperature from -20°C to +50°C
- Estimated lifespan of over 54 000 hours to L70
- 0-10V dimming driver included. Dimming cables sold separately





## COLOR TEMPERATURE



## FIXTURE COLOR

☐ White

## ACCESSORIES AND OPTIONS

V-Hooks, Chain Kits, Surface mount bracket, Conduit mount kit, Wireguard, External high frequency sensor kit, External PIR sensor kit, Remote control RM51 for motion sensors

## MOUNTING OPTIONS

Surface, suspended or pendant. Set of 2 V-Hooks and chains are provided with all configurations. Other mounting options are available, please consult accessory table.




Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at [www.designlights.org/search](http://www.designlights.org/search).



# L1LEH GEN. 1


## ECONO LED LINEAR HIGH BAY LUMINAIRE

### MULTI-VOLTAGE (120-347 V)

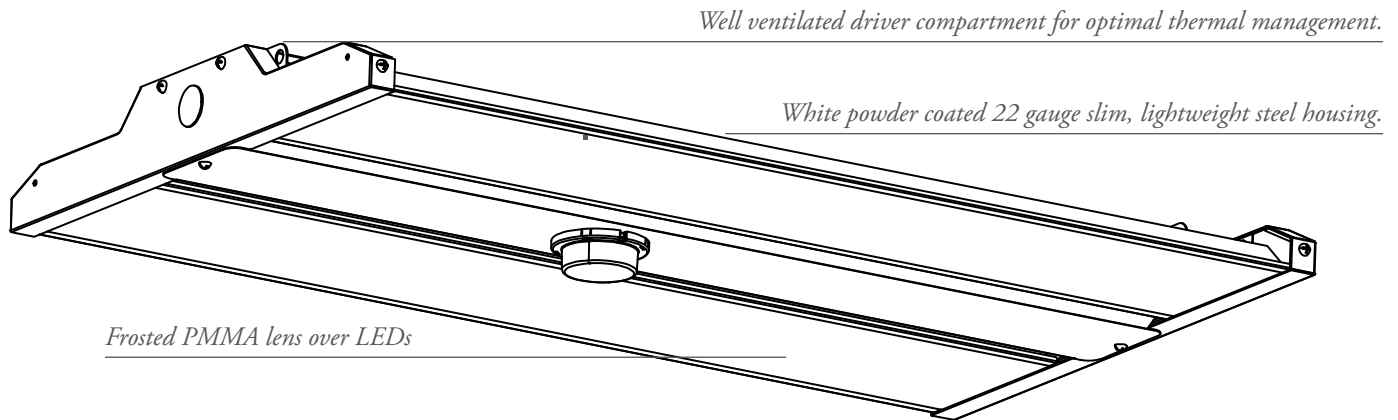

- 6' power cable included with all configurations
- Surge protection 2 kV

## DIMENSIONS

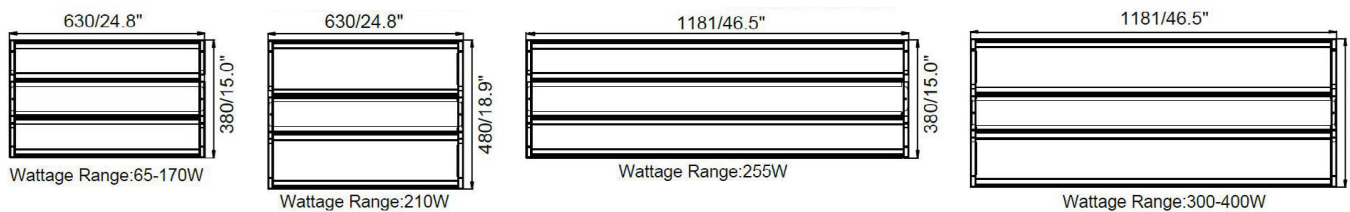













# NOTES



# NOTES

# NOTES





Printed in Canada.

© 2022 STANDARD Products Inc. All Rights Reserved.

Data is based upon tests performed in a controlled environment.  
Actual performance can vary depending on operating conditions.  
All products are subject to change or may be discontinued any time without notice.

For the latest version, please refer to our website.

[www.standardpro.com](http://www.standardpro.com)



**STANPRO**



**STANPRO**

[www.standardpro.com](http://www.standardpro.com)