

TRACK SYSTEMS



STANPRO





Projectors are used for accent lighting in just about any setting. Its purpose is to make a particular element, such as an architectural detail, a work of art or a showcased product stand out from everything around it.

The versatility of being able to remove, relocate and redirect these luminaires, allow for the flexibility to adjust your lighting needs as required.

TL & TLL SERIES

LED TRACK HEADS








TL22



TL94

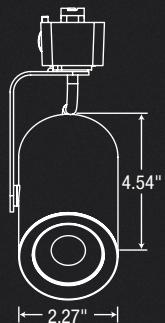


9 W

(920 lm - 1 008 lm)
Spot 16°, Narrow Flood 20°, Flood 35°

13 W

(1 343 lm - 1 544 lm)
Spot 20°, Narrow Flood 23°, Flood 36°

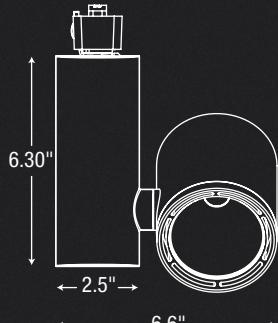


20 W

(1 961 lm - 2 160 lm)
Spot 20°, Narrow Flood 30°, Flood 38°

30 W

(2 868 lm - 3 683 lm)
Spot 21°, Narrow Flood 31°, Flood 38°

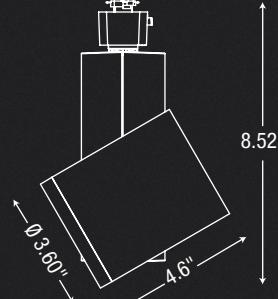

FOR ALL TL

Fixture Colors

Black

White

Color Temperatures

3 000 K

3 500 K



4 000 K

Features

- Die cast aluminum housing with integrated heat sink and driver
- Voltage: 120 V
- 80+ and 90+ CRI
- Compatible with "J" track ("H" track adaptor upon request)
- Luminous efficacy: over 100 lm/W for all wattages and color temperatures



TL96

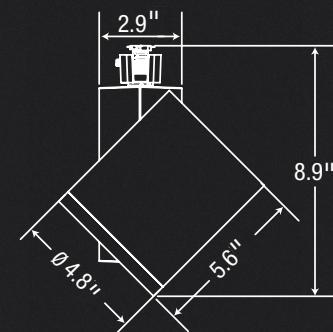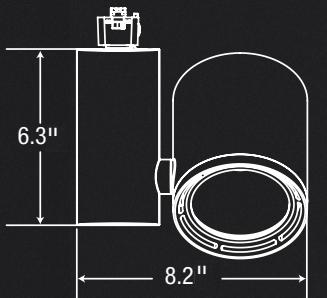

42 W


(4 507 lm - 4 567 lm)
Narrow Flood 22°, Flood 44°, Wide Flood 58°

Narrow
Flood

Flood

Wide
Flood

TLL

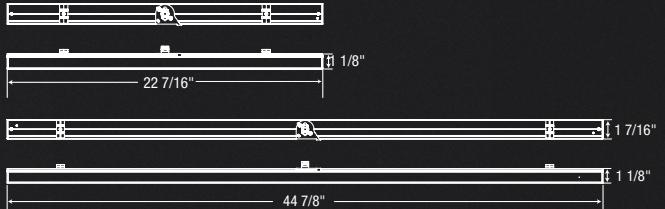

Diffused
Beam

18 W

(1 612 lm - 1 702 lm)
Diffused Beam 110°

36 W

(3 246 lm - 3 440 lm)
Diffused Beam 110°

FOR ALL TLL

Fixture Colors

Black

White

Color Temperatures

3 500 K

4 000 K

Features

- Aluminum housing with integrated driver
- Voltage: 120 V
- 80+ CRI
- Compatible with "J" track

5
yrs
warranty



LED
fixture



ICES
005

Ideal for accent and display lighting applications, the TL22 series features die cast aluminum construction with integrated heat sink in a sleek design. Available in multiple color temperature options and beam distributions, these luminaires are perfect for those applications where simplicity and high performance are required.

TL22 SERIES



TL22

LED TRACK HEAD



Housing

Die cast aluminum housing with integrated heat sink.

Heavy duty scratch resistant powder coated.

Optics/Lens

Standard lens that allows for desired beam angles. Lens constructed with plastic material.

Beams

9 W: Spot 16°, Narrow Flood 20°, Flood 35°
13 W: Spot 20°, Narrow Flood 23°, Flood 36°

LED

Color consistency (SDCM) is 3 step MacAdam ellipse.

Lumens & Efficacy

9 W: 863 lm - 972 lm
13 W: 1 320 lm - 1 499 lm
9 W: 3 000 K, 863 lm - 93 lm/W
13 W: 3 000 K, 1 371 lm - 100 lm/W

Driver

9 W and 13 W, 120 V Line voltage LE + TE Dimmable.

with "H" adapter are classified to be used Cooper Lighting L641/2/3 track series.

Adapter

Track heads with "J" adapter are classified to be used with Stanpro STJ track series, Juno T or TU track series. Easily switch the track head to two-circuit by pulling up contact. See instruction sheet for details. Track heads

ORDERING GUIDE

| TL22 — | | — | | — | | A | | — | |
|--------|--------------------|-----------------|----------|--------------------------------|---|-----------|-------------------------------|----------------------------|--|
| Series | Lumen package (lm) | Color temp. (K) | CRI | Beam distribution ¹ | Λ | Volts (V) | Adaptor | Fixture color ² | |
| TL22 | 09 - 863-972 | 30 - 3 000 | 80 - 80+ | S - Spot | | A - 120 | J - J & J2 track (standard) | BK - Black | |
| | 14 - 1 320-1 499 | 35 - 3 500 | 90 - 90+ | N - Narrow flood | | | H - H & H2 Track ¹ | WH - White | |
| | | 40 - 4 000 | | F - Flood | | | | | |

¹ Refer to Beam distribution chart for more details.

² For other options and availabilities please contact factory.


TECHNICAL SPECIFICATION TABLE

| Lumen package | Watts (W) | 3 000 K | | 3 500 K | | 4 000 K | |
|---------------|-----------|------------|-------------------|------------|-------------------|------------|-------------------|
| | | Lumen (lm) | Efficiency (lm/W) | Lumen (lm) | Efficiency (lm/W) | Lumen (lm) | Efficiency (lm/W) |
| 09 | 9 W | 863 lm | 93 lm | 888 lm | 97 lm | 944 lm | 102 lm |
| 14 | 13 W | 1 371 lm | 100 lm | 1 411 lm | 105 lm | 1 499 lm | 113 lm |


Note: All lumen information is based on Narrow flood beam reflector and 80+ CRI.

BEAM DISTRIBUTION CHART



TL22-09

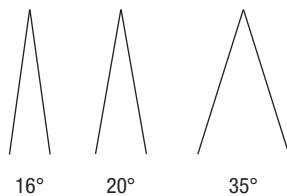

TL22-14

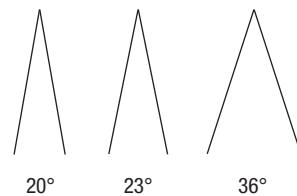

DIMENSIONS

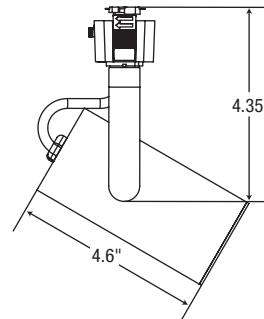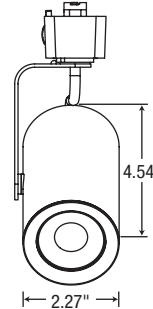

COMPATIBLE DIMMERS

| Brand | Leading edge model number | |
|---------|---------------------------|-----------|
| Lutron | SLV-600X | NFTU-5A |
| | S2-LX | DVLV-600P |
| Leviton | GL-600H | |
| | | 705-X |
| | | 6681-X |
| | | 6683-X |
| | | 6684-X |
| | | 700-X |
| Cooper | 9530XXX | |

| Brand | Trailing edge model number | |
|---------|----------------------------|---------------|
| Lutron | NTELV-600-XX | DVELV-300P-XX |
| | SELV-303P | SEIV-300P-XX |
| Leviton | MAELV-600-XX | |
| | | IPE04-1LZ |
| | | VZE06-1LX |
| | | 6674 |
| | | 6615-POT |
| Philips | SR400RPC120 | |

The fixture dimmer compatibility table shown above is for dimming functionality only. The dimmers listed in this chart may not comply to ICES 005 class A or B standards. To confirm ICES 005 compliance please contact the dimmer manufacturer.

TM21 TABLE • TL22 - (9W)

| | |
|---|---------|
| Time (t) at which to estimate lumen maintenance (hours) | 50 000 |
| Lumen maintenance at time (t) (%) | 94.88% |
| Calculated L70 (hours) | 693 500 |
| Reported L70 (hours) | 60 000 |

Note: Lumens are based on 30K color temperature.

TM21 TABLE • TL22 - (13W)

| | |
|---|---------|
| Time (t) at which to estimate lumen maintenance (hours) | 50 000 |
| Lumen maintenance at time (t) (%) | 93.07% |
| Calculated L70 (hours) | 299 700 |
| Reported L70 (hours) | >61 000 |

Note: Lumens are based on 30K color temperature.

5
yrs
warranty



LED
fixture



ICES
005

Highly versatile adjustable side-mounted luminaire. Featuring die-cast housing with an integrated heat sink, our TL94 series is ideal for applications that demand outstanding performance at no compromise to energy efficiency.

TL94 SERIES



TL94

LED TRACK HEAD



• Construction

Housing

Heavy duty die cast aluminum housing and integrated heat sink.

Finishes

Heavy duty scratch resistant powder coated.

Optics/ Reflectors

Reflector made of plastic material.

Beams

20 W: Spot 20°, Narrow Flood 30°, Flood 38°.

30 W: Spot 21°, Narrow Flood 31°, Flood 38°.

LED

Color consistency (SDCM) is 3 step McAdam ellipse.

Lumens & Efficacy

20 W: 1 961 lm - 2 267 lm
30 W: 2 655 lm - 2 825 lm
20 W: 3 000 K, 2 045 lm - 106 lm/W
30 W: 3 000 K, 2 689 lm - 98 lm/W

Driver

20 W and 30 W, 120 V Line voltage LE + TE Dimmable.

Adapter

Track heads with "J" adapter comes standard for single or two circuit to be used with Stanpro STJ track series, Juno T or TU track series and Prescolite TS or TT track series. Track heads with "H"

adapter are classified to be used with Stanpro STH track series and Cooper Lighting L641/2/3 track series.

ORDERING GUIDE

| TL94 — | | — A | | | | | | |
|--------|--------------------|-----------------|----------|--------------------------------|-----------|-------------------------------|----------------------------|--|
| Series | Lumen package | Color temp. (K) | CRI | Beam distribution ¹ | Volts (V) | Adaptor | Fixture color ² | |
| TL94 | 20 - 1 961 - 2 267 | 30 - 3 000 | 80 - 80+ | S - Spot | A - 120 | J - J & J2 track (standard) | BK - Black | |
| | 30 - 2 655 - 2 825 | 35 - 3 500 | 90 - 90+ | N - Narrow flood | | H - H & H2 Track ¹ | WH - White | |
| | | 40 - 4 000 | | F - Flood | | | | |

¹ Refer to Beam distribution chart for more details.

² For other options and availabilities please contact factory.


LUMEN CHART TABLE

| Lumen package | Watts (W) | 3 000 K | | 3 500 K | | 4 000 K | |
|---------------|-----------|------------|-------------------|------------|-------------------|------------|-------------------|
| | | Lumen (lm) | Efficiency (lm/W) | Lumen (lm) | Efficiency (lm/W) | Lumen (lm) | Efficiency (lm/W) |
| 20 | 20 W | 2 045 lm | 106 lm/W | 2 113 lm | 110 lm/W | 2 267 lm | 117 lm/W |
| 30 | 30 W | 2 689 lm | 98 lm/W | 2 732 lm | 96 lm/W | 2 784 lm | 109 lm/W |


Note: All lumen information is based on Narrow flood beam reflector and 80+ CRI.

BEAM DISTRIBUTION CHART


TL94-20

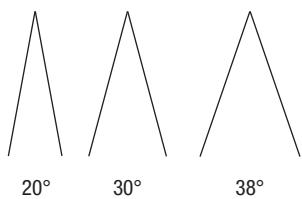

TL94-30

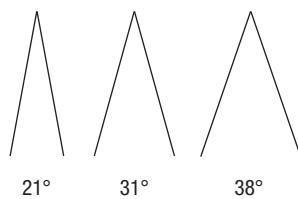

DIMENSIONS

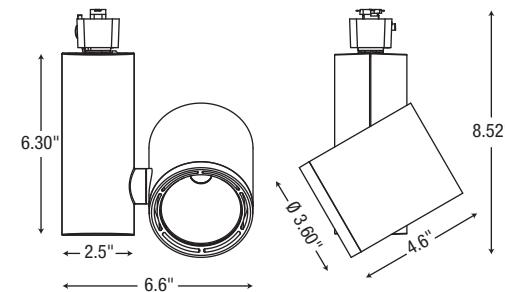

COMPATIBLE DIMMERS

| Brand | Leading edge model number | |
|---------|--|--|
| Lutron | DV-600P DVLV-600P SELV-300P NFTU-5A | CTCL-153P GL-600H S-600P SR150LED |
| Philips | SR150LED | |

| Brand | Trailing edge model number |
|--------|--------------------------------------|
| Lutron | DVELV-303P NTELV-600 MAELV-600 |

The fixture dimmer compatibility table shown beside is for dimming functionality only. The dimmers listed in this chart may not comply to ICES 005 class A or B standards. To confirm ICES 005 compliance please contact the dimmer manufacturer.

TM21 TABLE • TL94 - (20W)

| | |
|---|---------|
| Time (t) at which to estimate lumen maintenance (hours) | 10 080 |
| Lumen maintenance at time (t) (%) | 71.17% |
| Calculated L70 (hours) | 133 000 |
| Reported L70 (hours) | >60 500 |

Note: Lumens are based on 30K color temperature.

TM21 TABLE • TL94 - (30W)

| | |
|---|---------|
| Time (t) at which to estimate lumen maintenance (hours) | 11 088 |
| Lumen maintenance at time (t) (%) | 71.17% |
| Calculated L70 (hours) | 182 000 |
| Reported L70 (hours) | >61 000 |

Note: Lumens are based on 30K color temperature.

5
yrs
warranty



LED
fixture



ICES
005

Clean lines and aesthetic design fit easily into all applications and become part of the design concept. TL96 series offers excellent beam control while providing high performance accent lighting for retail and commercial applications.

TL96 SERIES



TL96

LED TRACK HEAD



Housing

Heavy duty die cast aluminum housing and integrated heat sink.

Finishes

Heavy duty scratch resistant powder coated.

Optics/ Reflectors

Reflector made of plastic material.

Beams

Narrow Flood 22°, Flood 44°, Wide Flood 58°

Lumens

3 800 lm - 4 042 lm
41 W: 3 000 K, 92.3 lm/W

Driver

41 W, 120V Line voltage LE + TE Dimmable.

Adapter

Track heads with "J" adapter comes standard for single or two circuit to be used with Stanpro STJ track series, Juno T or

TU track series and Prescolite TS or TT track series. Track heads with "H" adapter are classified to be used with Stanpro STH track series and Cooper Lighting L641/2/3 track series.

ORDERING GUIDE

| | | | | | | | | | |
|--------|--------------------|--|----------------------|---|---------|--|--------------------------|----------------------------|--|
| TL96 | — | 40 | — | | | | A | | |
| Series | Lumen package | Color temp. (K) | CRI | Beam distribution ¹ | ▲ | Volts (V) | Adaptor | Fixture color ² | |
| TL96 | 40 - 3 800 - 4 042 | 30 - 3 000 35 - 3 500 40 - 4 000 | 80 - 80+ 90 - 90+ | N - Narrow flood F - Flood W - Wide flood | A - 120 | J - J & J2 track (standard) H - H & H2 Track ¹ | BK - Black WH - White | | |

¹ Refer to Beam distribution chart for more details.

² For other options and availabilities please contact factory.


LUMEN CHART TABLE

| Lumen package | Watts (W) | 3 000 K | | 3 500 K | | 4 000 K | |
|---------------|-----------|------------|-------------------|------------|-------------------|------------|-------------------|
| | | Lumen (lm) | Efficiency (lm/W) | Lumen (lm) | Efficiency (lm/W) | Lumen (lm) | Efficiency (lm/W) |
| 40 | 41 W | 3 756 | 92.3 | 3 808 | 93.9 | 3 872 | 94.6 |

Note: All lumen information is based on Narrow flood beam reflector and 80+ CRI.

BEAM DISTRIBUTION CHART


TL96-40

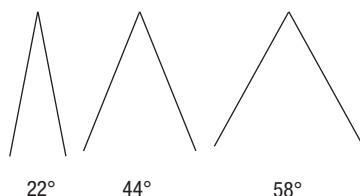

COMPATIBLE DIMMERS

| Brand | Model number | |
|------------|---|---|
| Lutron | S-603PG DVELV-303P CT-130P DVCL-153P DV-600P TGCL-153P | S-600P SELV-300P TG-600P LG-600P MAELV-600 FAELV-500 |
| Leviton | IPI06-1LZ 6631-2 VPE06 6683-IW | 6161 6633-P IPE04 |
| Lightolier | ZP260QEW | |
| Cooper | DAL06P DLC03P SLC03P | |

DIMENSIONS

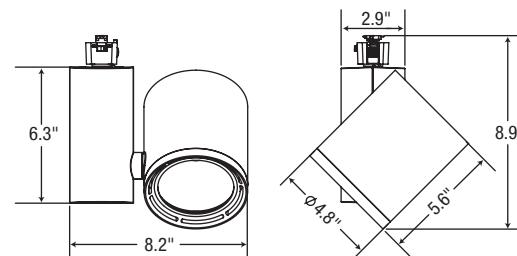

TM21 TABLE • TL96

| | |
|---|---------|
| Time (t) at which to estimate lumen maintenance (hours) | 50 000 |
| Lumen maintenance at time (t) (%) | 95.01% |
| Calculated L70 (hours) | 451 000 |
| Reported L70 (hours) | >33 000 |

Note: Lumens are based on 30K color temperature.

The fixture dimmer compatibility table shown beside is for dimming functionality only. The dimmers listed in this chart may not comply to ICES 005 class A or B standards. To confirm ICES 005 compliance please contact the dimmer manufacturer.

5
yrs
warranty



LED
fixture



ICES
005

The TLL is a newly developed linear LED track mounted luminaire. It provides highly efficient illumination and it comes with J & J2 style track adaptor. The TLL can be used to add general lighting along with regular track heads. Its slim housing allows it to be installed in restricted areas such as coves and also display application. Available in 2 foot and 4 foot comes with a diffused lens.

TLL SERIES



Housing
Extruded aluminum lightweight LED linear track

Finished
Heavy duty scratch resistant powder coated.
Available in textured white and black.

Optics
Comes standard with a polycarbonate frosted lens.

Lumens
1 612 lm - 3 440 lm

Efficacy
18W: 3000K, 89.6 lm/W
36W: 3000K, 90.2 lm/W

Adapter
Track linear with "J" adapter are classified to be used with Stanpro STJ track series, Juno T or TU track series and Prescolite TS or TT track series.

QUICK SHIP ORDERING GUIDE WITH FROSTED LENS DIFFUSED ¹

| Part number | Watts | Volts | Color temp. (K) ² | Lumen | Efficiency (lm/W) | Lens finish | CRI | Life L70 (hrs) ³ | Finish | Power factor | THD (%) | Case qty (master) |
|--------------------|-------|-------|------------------------------|-------|-------------------|-----------------------|-----|-----------------------------|--------|--------------|---------|-------------------|
| 2' | | | | | | | | | | | | |
| TLL2-183080DU-AJWH | 18 | 120 | 3 000 | 1 612 | 90 | Frosted lens diffused | 80+ | 50 000 | White | >0.9 | <20 | 20 |
| TLL2-183580DU-AJWH | 18 | 120 | 3 500 | 1 612 | 90 | Frosted lens diffused | 80+ | 50 000 | White | >0.9 | <20 | 20 |
| TLL2-184080DU-AJBK | 18 | 120 | 4 000 | 1 708 | 95 | Frosted lens diffused | 80+ | 50 000 | Black | >0.9 | <20 | 20 |
| TLL2-184080DU-AJWH | 18 | 120 | 4 000 | 1 708 | 95 | Frosted lens diffused | 80+ | 50 000 | White | >0.9 | <20 | 20 |
| 4' | | | | | | | | | | | | |
| TLL4-363080DU-AJWH | 36 | 120 | 3 000 | 3 246 | 90 | Frosted lens diffused | 80+ | 50 000 | White | >0.9 | <20 | 20 |
| TLL4-363580DU-AJBK | 36 | 120 | 3 500 | 3 246 | 90 | Frosted lens diffused | 80+ | 50 000 | Black | >0.9 | <20 | 20 |
| TLL4-363580DU-AJWH | 36 | 120 | 3 500 | 3 246 | 90 | Frosted lens diffused | 80+ | 50 000 | White | >0.9 | <20 | 20 |
| TLL4-364080DU-AJWH | 36 | 120 | 4 000 | 3 440 | 96 | Frosted lens diffused | 80+ | 50 000 | White | >0.9 | <20 | 20 |

¹ **QUICK SHIP:** Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

² Typical color temperature range: +/- 5 %.


³ Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

⁴ Life hours are derived from IESNA LM-80-08 testing report and projected per IESNA TM-21-11 extrapolations.

LUMEN CHART
TM21 TABLE – TLL (20W and 36W)

| Lumen package | Watts (W) | 3 000 K | | 3 500 K | | 4 000 K | |
|---------------|-----------|------------|-------------------|------------|-------------------|------------|-------------------|
| | | Lumen (lm) | Efficiency (lm/W) | Lumen (lm) | Efficiency (lm/W) | Lumen (lm) | Efficiency (lm/W) |
| 18 | 18 | 1 612 | 89.6 | 1 612 | 89.6 | 1 708 | 94.9 |
| 36 | 36 | 3 246 | 90.2 | 3 246 | 90.2 | 3 440 | 95.6 |

| | |
|---|--------|
| Time (t) at which to estimate lumen maintenance (hours) | 50 000 |
| Lumen maintenance at time (t) (%) | 83.12% |
| Calculated L70 (hours) | 95 240 |
| Reported L70 (hours) | 36 000 |

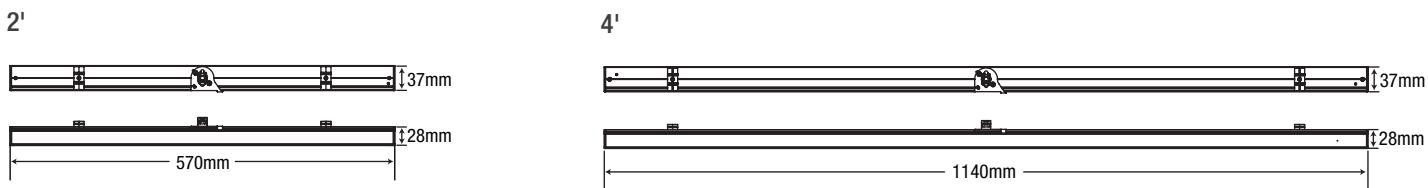DIMENSIONS




5
yrs
warranty



**LED
fixture**



**ICES
005**

The Stanpro single or double LED wall washer is made of an extruded aluminum housing which provides durability, clean lines and optimal thermal dissipation. The TWL02S (30W) and TWL02D (50W) come complete with J & J2 style track adaptor. H & H2 style adaptor available upon request. Suitable for ceiling-mounted tracks.

TWL02 SERIES

TWL02S/TWL02D

LED WALL WASHER

30 W OR 50 W



Housing

Extruded aluminum lightweight LED linear track

Material

Die-cast aluminum driver housing.

Aiming

Precision aiming adjustment with a pivot that allows for rotations up to 350° vertically in both directions. Each side of the double fixture can be independently adjusted for more flexibility.

LED

Single

30 W LED: 3 000 K (2 580 lm) (4 000 K upon request)

Double

50: 50 W LED : 3 000 K (4 737 lm) (4 000 K upon request)

Estimated lifespan of over 54 000 hours to L70.

Drivers

Integral electronic driver, dimmable with standard dimmers.

Finishes

Heavy duty scratch resistant powder coated. Available in textured white and black (glossy silver upon request).

Lens and Louvers

The fixture comes with frosted lens in

polycarbonate. Optional louvers available as accessories.

Adapter

Track heads with "J" adapter are classified to be used with Stanpro STJ track series, Juno T or TU track series and Prescolite TS or TT track series. Track heads with "H" adapter are classified to be used with Stanpro STH track series and Cooper Lighting L641/2/3 track series.



ORDERING GUIDE



| Series | Watts (W) | Color temp. (K) | Volts (V) | Adapter | Finish ² |
|--------|-----------|---|-----------|---|--------------------------|
| TWL02S | 30 - 30 | 30K - 3 000 40K - 4 000 ¹ | A 120 | J - J & J2 Track H - H & H2 track ¹ | BK - Black WH - White |
| TWL02D | 50 - 50 | | | | |


¹ Please contact factory for availability.

² For other options and availabilities please contact factory.

ACCESSORIES (order separately)

| Part number | Type |
|-------------|--------|
| LEN325-WH | Louver |
| LEN325-BK | Louver |

DIMENSIONS

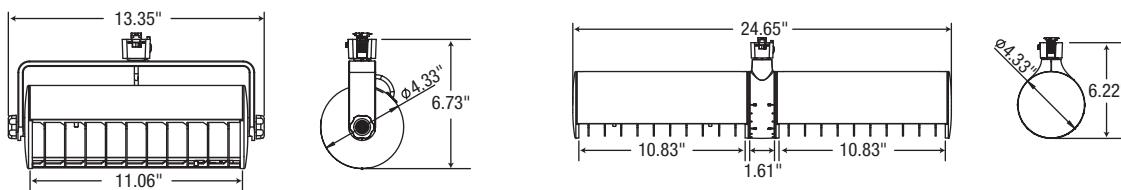

TG & TL SERIES

COMMODITY TRACK HEADS





1
yr
warranty



Front loaded economical PAR38 Gimbal style track head. Integral on/off switch and track polarity indicator come standard. The TG05N comes complete with J & J2 style track adaptor. H & H2 style adaptor available upon request.

TG05N SERIES



TG05N

PAR38 – FRONT LOAD

250W MAX.

SPECIFICATIONS

Material

Heavy duty housing designed for commercial use.

Aiming

The secure yoke provides precision aiming without the need for tools.

Lamps

Incandescent or LED (**lamp not included**)

Max 250W-E26 medium base PAR38 style lamps.

Finishes

Heavy duty scratch resistant powder coated. Available in glossy white, black and silver.

Accessories

Line voltage extensions (12", 18", 24", 36") are available. Please refer to the "tracks and accessories" pages for ordering guide.

Adaptor

Track heads with "J" adaptor are classified to be used with Stanpro STJ track series, Juno T or TU track series and Prescolite TS or TT track series. Track heads with "H" adaptor are classified to be used with Stanpro STH track series and Cooper Lighting L641/2/3 track series.

ORDERING GUIDE

| TG05N | | N | 0250 | A | | | |
|--------|------------------|---------------|-----------|--|--|--|--|
| Series | Lamp type | Watts (W) | Volts (V) | Adaptor | | Fixture color | |
| TG05N | N - Incandescent | 250 - 250 max | A - 120 | J - J & J2 track (standard) H ² - H & H2 Track | | BK - Black WH - White SI ² - Silver | |

¹ **QUICK SHIP:** Not all products are Quick Ship. To view our Quick Ship qualified products, please consult our Quick Ship Product Guide at stanpros.com/quick-ship-product-guide. Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

² Available on request, please contact factory.


COMPATIBLE LAMPS SUGGESTED

Traditional look with an LED lamp!

| Order code | Description | Watts (W) | Base | Volts (VAC) | Color temp. (K) | CRI | Life L70 (hrs) | Lumen output (lm) | Beam angle (°) | CBCP (cd) | Traditional equivalent (W) | Case qty (inner/master) |
|--------------|------------------------------|-----------|------|-------------|-----------------|-----|----------------|-------------------|----------------|-----------|----------------------------|-------------------------|
| PAR38 | | | | | | | | | | | | |
| 67613 | P38/15W/30K/45/DESIGN/STD | 15 | E26 | 120 | 3 000 | 80 | 25 000 | 1 200 | 45 | 1 150 | 100 | 1/10 |
| 67614 | P38/15W/40K/45/DESIGN/STD | 15 | E26 | 120 | 4 000 | 80 | 25 000 | 1 200 | 45 | 1 500 | 100 | 1/10 |
| 66297 | P38/16.5W/27K/25/CHOICE/STD | 16.5 | E26 | 120 | 2 700 | ≥90 | 15 000 | 1 360 | 25 | 6 067 | 100 | 1/6 |
| 66298 | P38/16.5W/27K/40/CHOICE/STD | 16.5 | E26 | 120 | 2 700 | ≥90 | 15 000 | 1 398 | 40 | 2 527 | 100 | 1/6 |
| 69226 | P38/S2/13W/30K/25/CHOICE/STD | 13 | E26 | 120 | 3 000 | ≥90 | 25 000 | 1 450 | 25 | 6 067 | 100 | 1/6 |
| 69227 | P38/S2/13W/30K/40/CHOICE/STD | 13 | E26 | 120 | 3 000 | ≥90 | 25 000 | 1 450 | 40 | 2 527 | 100 | 1/6 |
| 69228 | P38/S2/13W/40K/25/CHOICE/STD | 13 | E26 | 120 | 4 000 | ≥90 | 25 000 | 1 490 | 25 | 6 067 | 100 | 1/6 |
| 66302 | P38/16.5W/40K/40/CHOICE/STD | 16.5 | E26 | 120 | 4 000 | ≥90 | 15 000 | 1 510 | 40 | 2 527 | 100 | 1/6 |
| 67914 | P38HO/27W/30K/25/120-277/STD | 27 | E26 | 120-277 | 3 000 | - | 25 000 | 3 000 | 25 | - | 250 | 1/6 |



DIMENSIONS

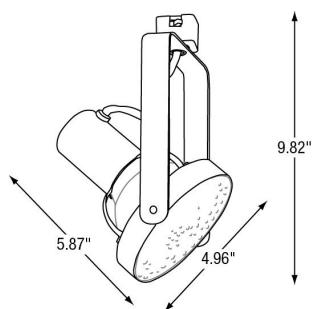

1
yr
warranty



**quick
ship**

Front loaded economical PAR30 Gimbal style track head. Integral on/off switch and track polarity indicator come standard. The TG07N comes complete with J & J2 style track adaptor. H & H2 style adaptor available upon request.

TG07N SERIES



TG07N

PAR30S – FRONT LOAD

75W MAX.

SPECIFICATIONS

Material

Heavy duty housing designed for commercial use.

Aiming

The secure yoke provides precision aiming without the need for tools.

Lamps

Incandescent or LED (**lamp not included**)

Max 75W-E26 medium base PAR30S style lamps.

Finishes

Heavy duty scratch resistant powder coated. Available in glossy white, black and silver.

Accessories

Line voltage extensions (12", 18", 24", 36") are available. Please refer to the "tracks and accessories" pages for ordering guide.

Adaptor

Track heads with "J" adaptor are classified to be used with Stanpro STJ track series, Juno T or TU track series and Prescolite TS or TT track series. Track heads with "H" adaptor are classified to be used with Stanpro STH track series and Cooper Lighting L641/2/3 track series.

ORDERING GUIDE

| TG07N | | N | 0075 | A | | |
|--------|------------------|---|---------------|-----------|--|---|
| Series | Lamp type | | Watts (W) | Volts (V) | Adaptor | Fixture color |
| TG07N | N - Incandescent | | 0075 - 75 max | A - 120 | J - J & J2 track (standard) H 2- H & H2 Track | BK - Black WH - White SI 2 - Silver |

1 **QUICK SHIP:** Not all products are Quick Ship. To view our Quick Ship qualified products, please consult our Quick Ship Product Guide at stanpros.com/quick-ship-product-guide. Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

2 Available on request, please contact factory.


COMPATIBLE LAMPS SUGGESTED

Traditional look with an LED lamp!

| Order code | Description | Watts (W) | Base | Volts (VAC) | Color temp. (K) | CRI | Life L70 (hrs) | Lumen output (lm) | Beam angle (°) | CBCP (cd) | Traditional equivalent (W) | Case qty (inner/master) |
|----------------|------------------------------|-----------|------|-------------|-----------------|-----|----------------|-------------------|----------------|-----------|----------------------------|-------------------------|
| PAR30SN | | | | | | | | | | | | |
| 67609 | P30S/10W/30K/45/DESIGN/STD | 10 | E26 | 120 | 3 000 | 80 | 25 000 | 750 | 45 | 810 | 60 | 1/20 |
| 67610 | P30S/10W/40K/45/DESIGN/STD | 10 | E26 | 120 | 4 000 | 80 | 25 000 | 750 | 45 | 810 | 60 | 1/20 |
| 69218 | P30S/S2/8W/27K/25/CHOICE/STD | 8 | E26 | 120 | 2 700 | ≥90 | 25 000 | 887 | 25 | 3 843 | 75 | 1/6 |
| 66292 | P30S/12W/27K/40/CHOICE/STD | 12 | E26 | 120 | 2 700 | ≥90 | 15 000 | 929 | 40 | 1 740 | 75 | 1/6 |
| 69220 | P30S/S2/8W/30K/25/CHOICE/STD | 8 | E26 | 120 | 3 000 | ≥90 | 25 000 | 935 | 25 | 3 843 | 75 | 1/6 |
| 69221 | P30S/S2/8W/30K/40/CHOICE/STD | 8 | E26 | 120 | 3 000 | ≥90 | 25 000 | 935 | 40 | 1 740 | 75 | 1/6 |
| 66295 | P30S/12W/40K/25/CHOICE/STD | 12 | E26 | 120 | 4 000 | ≥90 | 15 000 | 1 006 | 25 | 3 843 | 75 | 1/6 |
| 69223 | P30S/S2/8W/40K/40/CHOICE/STD | 8 | E26 | 120 | 4 000 | ≥90 | 25 000 | 985 | 40 | 1 740 | 75 | 1/6 |



DIMENSIONS

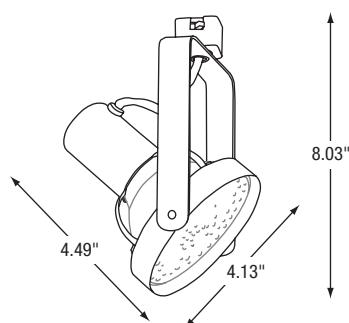


1
yr
warranty



**quick
ship**

Front loaded economical PAR20 Gimbal style track head. Integral on/off switch and track polarity indicator come standard. The TG08N comes complete with J & J2 style track adaptor. H & H2 style adaptor available upon request.

TG08N SERIES

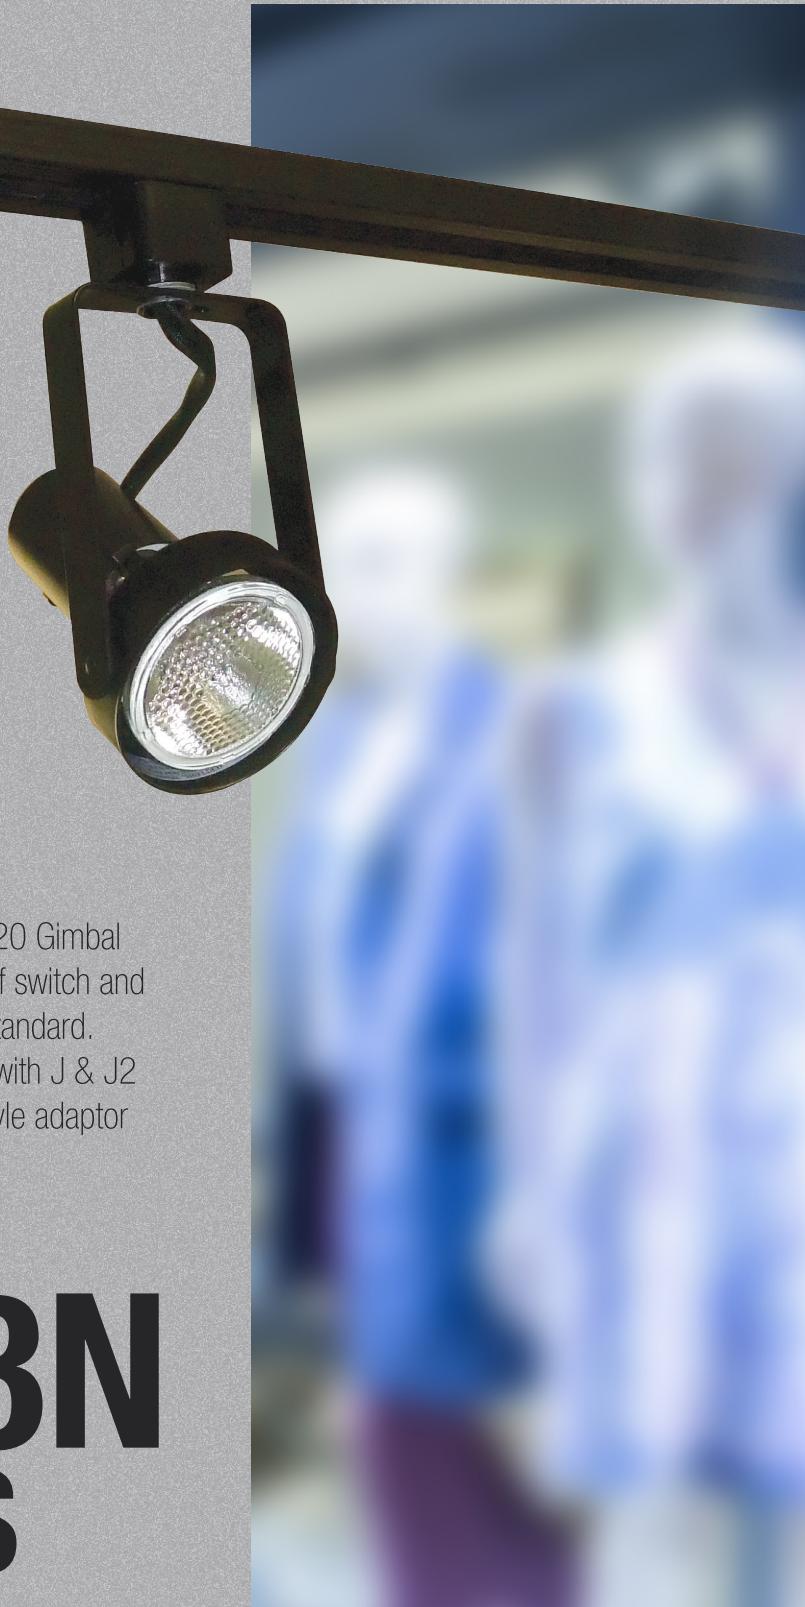

TG08N

PAR20 – FRONT LOAD 50W MAX.

SPECIFICATIONS

Material

Heavy duty housing designed for commercial use.

Aiming

The secure yoke provides precision aiming without the need for tools.

Lamps

Incandescent or LED (**lamp not included**)

Max 50W-E26 medium base PAR20 style lamps.

Finishes

Heavy duty scratch resistant powder coated. Available in glossy white, black and silver.

Accessories

Line voltage extensions (12", 18", 24", 36") are available. Please refer to the "tracks and accessories" pages for ordering guide.

Adaptor

Track heads with "J" adaptor are classified to be used with Stanpro STJ track series, Juno T or TU track series and Prescolite TS or TT track series. Track heads with "H" adaptor are classified to be used with Stanpro STH track series and Cooper Lighting L641/2/3 track series.

ORDERING GUIDE

| TG08N | | N | 0050 | A | | |
|--------|------------------|---|---------------|-----------|--|---|
| Series | Lamp type | | Watts (W) | Volts (V) | Adaptor | Fixture color |
| TG08N | N - Incandescent | | 0050 - 50 max | A - 120 | J - J & J2 track (standard) H ² - H & H2 Track | BK - Black WH - White SI - Silver |

¹ **QUICK SHIP:** Not all products are Quick Ship. To view our Quick Ship qualified products, please consult our Quick Ship Product Guide at stanpros.com/quick-ship-product-guide. Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

² Available on request, please contact factory.


COMPATIBLE LAMPS SUGGESTED

Traditional look with an LED lamp!

| Order code | Description | Watts (W) | Base | Volts (VAC) | Color temp. (K) | CRI | Life L70 (hrs) | Lumen output (lm) | Beam angle (°) | CBCP (cd) | Traditional equivalent (W) | Case qty (inner/master) |
|--------------|-------------------------------|-----------|------|-------------|-----------------|-----|----------------|-------------------|----------------|-----------|----------------------------|-------------------------|
| PAR20 | | | | | | | | | | | | |
| 67609 | P20/7W/30K/45/DESIGN/STD | 7 | E26 | 120 | 2 700 | 80 | 25 000 | 500 | 45 | 520 | 50 | 10/60 |
| 67608 | P20/7W/40K/45/DESIGN/STD | 7 | E26 | 120 | 3 000 | 80 | 25 000 | 500 | 45 | 520 | 50 | 10/60 |
| 69206 | P20/S2/6.5W/27K/25/CHOICE/STD | 6.5 | E26 | 120 | 2 700 | ≥90 | 25 000 | 514 | 25 | 1 708 | 50 | 1/12 |
| 69207 | P20/S2/6.5W/27K/40/CHOICE/STD | 6.5 | E26 | 120 | 2 700 | ≥90 | 25 000 | 514 | 40 | 914 | 50 | 1/12 |
| 69208 | P20/S2/6.5W/30K/25/CHOICE/STD | 6.5 | E26 | 120 | 3 000 | ≥90 | 25 000 | 554 | 25 | 1 708 | 50 | 1/12 |
| 69209 | P20/S2/6.5W/30K/40/CHOICE/STD | 6.5 | E26 | 120 | 3 000 | ≥90 | 25 000 | 554 | 40 | 914 | 50 | 1/12 |
| 66283 | P20/8W/40K/25/CHOICE/STD | 8 | E26 | 120 | 4 000 | ≥90 | 15 000 | 616 | 25 | 1 708 | 50 | 1/12 |
| 69211 | P20/S2/6.5W/40K/40/CHOICE/STD | 6.5 | E26 | 120 | 4 000 | ≥90 | 25 000 | 575 | 40 | 914 | 50 | 1/12 |



DIMENSIONS

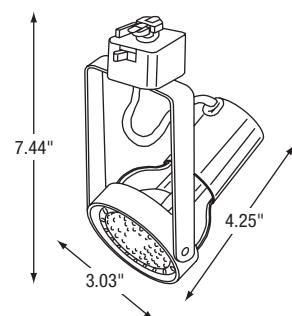

1
yr
warranty



quick
ship

The economical adjustable socket style track head allows for the proper seating of various lamps. Integral on/off switch and track polarity indicator come standard. The TL10 comes complete with J & J2 style track adaptor. H & H2 style adaptor available upon request.

TL10 SERIES



TL10

ADJUSTABLE SOCKET

250W MAX.

SPECIFICATIONS

Material

Heavy duty housing designed for commercial use.

Aiming

The secure yoke provides precision aiming without the need for tools.

Lamps

Incandescent or LED (**lamp not included**)

E26 medium base style lamps:


Max 75W PAR16

Max 50W PAR20

Max 75W PAR30LN

Max 250W PAR38

DIMENSIONS

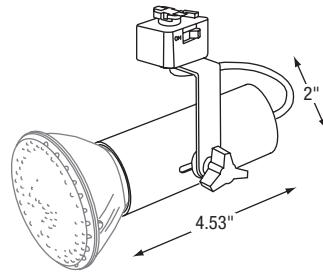

Finishes

Heavy duty scratch resistant powder coated. Available in glossy white, black and silver.

Adaptor

Track heads with "J" adaptor are classified to be used with Stanpro STJ track series, Juno T or TU track series and Prescolite TS or TT track series. Track heads with "H" adaptor are classified to be used with Stanpro STH track series and Cooper Lighting L641/2/3 track series.

ORDERING GUIDE

| TL10 | N | 0250 | A | | |
|--------|------------------|----------------|-----------|--|--|
| Series | Lamp type | Watts (W) | Volts (V) | Adaptor | Fixture color |
| TL10 | N - Incandescent | 0250 - 250 max | A - 120 | J - J & J2 track (standard) H ² - H & H2 Track | BK - Black WH - White SI ² - Silver |

¹ **QUICK SHIP:** Not all products are Quick Ship. To view our Quick Ship qualified products, please consult our Quick Ship Product Guide at stanpros.com/quick-ship-product-guide. Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

² Available on request, please contact factory.

COMPATIBLE LAMPS SUGGESTED *Traditional look with an LED lamp!*

| Order code | Description | Watts (W) | Base | Volts (VAC) | Color temp. (K) | CRI | Life L70 (hrs) | Lumen output (lm) | Beam angle (°) | CBCP (cd) | Traditional equivalent (W) | Case qty (inner/master) |
|------------|-------------|-----------|------|-------------|-----------------|-----|----------------|-------------------|----------------|-----------|----------------------------|-------------------------|
|------------|-------------|-----------|------|-------------|-----------------|-----|----------------|-------------------|----------------|-----------|----------------------------|-------------------------|

PAR20

| | | | | | | | | | | | | |
|-------|-------------------------------|-----|-----|-----|-------|-----|--------|-----|----|-------|----|-------|
| 67607 | P20/7W/30K/45/DESIGN/STD | 7 | E26 | 120 | 2 700 | 80 | 25 000 | 500 | 45 | 520 | 50 | 10/60 |
| 67608 | P20/7W/40K/45/DESIGN/STD | 7 | E26 | 120 | 3 000 | 80 | 25 000 | 500 | 45 | 520 | 50 | 10/60 |
| 69206 | P20/S2/6.5W/27K/25/CHOICE/STD | 6.5 | E26 | 120 | 2 700 | ≥90 | 25 000 | 514 | 25 | 1 708 | 50 | 1/12 |
| 69207 | P20/S2/6.5W/27K/40/CHOICE/STD | 6.5 | E26 | 120 | 2 700 | ≥90 | 25 000 | 514 | 40 | 914 | 50 | 1/12 |
| 69208 | P20/S2/6.5W/30K/25/CHOICE/STD | 6.5 | E26 | 120 | 3 000 | ≥90 | 25 000 | 554 | 25 | 1 708 | 50 | 1/12 |
| 69209 | P20/S2/6.5W/30K/40/CHOICE/STD | 6.5 | E26 | 120 | 3 000 | ≥90 | 25 000 | 554 | 40 | 914 | 50 | 1/12 |
| 66283 | P20/8W/40K/25/CHOICE/STD | 8 | E26 | 120 | 4 000 | ≥90 | 15 000 | 616 | 25 | 1 708 | 50 | 1/12 |
| 69211 | P20/S2/6.5W/40K/40/CHOICE/STD | 6.5 | E26 | 120 | 4 000 | ≥90 | 25 000 | 575 | 40 | 914 | 50 | 1/12 |



PAR30LN

| | | | | | | | | | | | | |
|-------|------------------------------|----|-----|-----|-------|-----|--------|-------|----|-------|----|------|
| 67611 | P30L/13W/30K/45/DESIGN/STD | 13 | E26 | 120 | 3 000 | 80 | 25 000 | 950 | 45 | 1 100 | 75 | 1/20 |
| 67612 | P30L/13W/40K/45/DESIGN/STD | 13 | E26 | 120 | 4 000 | 80 | 25 000 | 950 | 45 | 1 150 | 75 | 1/20 |
| 66285 | P30L/12W/27K/25/CHOICE/STD | 12 | E26 | 120 | 2 700 | ≥90 | 15 000 | 942 | 25 | 4 178 | 75 | 1/6 |
| 66286 | P30L/12W/27K/40/CHOICE/STD | 12 | E26 | 120 | 2 700 | ≥90 | 15 000 | 935 | 40 | 1 813 | 75 | 1/6 |
| 69214 | P30L/S2/8W/30K/25/CHOICE/STD | 8 | E26 | 120 | 3 000 | ≥90 | 15 000 | 901 | 25 | 4 178 | 75 | 1/6 |
| 69215 | P30L/S2/8W/30K/40/CHOICE/STD | 8 | E26 | 120 | 3 000 | ≥90 | 25 000 | 901 | 40 | 1 813 | 75 | 1/6 |
| 66289 | P30L/12W/40K/25/CHOICE/STD | 12 | E26 | 120 | 4 000 | ≥90 | 15 000 | 1 024 | 25 | 4 178 | 75 | 1/6 |
| 69217 | P30L/S2/8W/40K/40/CHOICE/STD | 8 | E26 | 120 | 4 000 | ≥90 | 25 000 | 999 | 40 | 1 813 | 75 | 1/6 |



PAR38

| | | | | | | | | | | | | |
|-------|------------------------------|------|-----|---------|-------|-----|--------|-------|----|-------|-----|------|
| 67613 | P38/15W/30K/45/DESIGN/STD | 15 | E26 | 120 | 3 000 | 80 | 25 000 | 1 200 | 45 | 1 150 | 100 | 1/10 |
| 67614 | P38/15W/40K/45/DESIGN/STD | 15 | E26 | 120 | 4 000 | 80 | 25 000 | 1 200 | 45 | 1 500 | 100 | 1/10 |
| 66297 | P38/16.5W/27K/25/CHOICE/STD | 16.5 | E26 | 120 | 2 700 | ≥90 | 15 000 | 1 360 | 25 | 6 067 | 100 | 1/6 |
| 66298 | P38/16.5W/27K/40/CHOICE/STD | 16.5 | E26 | 120 | 2 700 | ≥90 | 15 000 | 1 398 | 40 | 2 527 | 100 | 1/6 |
| 69226 | P38/S2/13W/30K/25/CHOICE/STD | 13 | E26 | 120 | 3 000 | ≥90 | 25 000 | 1 450 | 25 | 6 067 | 100 | 1/6 |
| 69227 | P38/S2/13W/30K/40/CHOICE/STD | 13 | E26 | 120 | 3 000 | ≥90 | 25 000 | 1 450 | 40 | 2 527 | 100 | 1/6 |
| 69228 | P38/S2/13W/40K/25/CHOICE/STD | 13 | E26 | 120 | 4 000 | ≥90 | 25 000 | 1 490 | 25 | 6 067 | 100 | 1/6 |
| 66302 | P38/16.5W/40K/40/CHOICE/STD | 16.5 | E26 | 120 | 4 000 | ≥90 | 15 000 | 1 510 | 40 | 2 527 | 100 | 1/6 |
| 67914 | P38H0/27W/30K/25/120-277/STD | 27 | E26 | 120-277 | 3 000 | - | 25 000 | 3 000 | 25 | - | 250 | 1/6 |



1
yr
warranty



quick
ship

The economical adjustable side swivel track head allows for the proper seating of various lamps including PAR30 long neck. It features a half yoke design with slide adjustment slot to maximize the fixture height options. Integral on/off switch and track polarity indicator come standard. The TL95 comes complete with J & J2 style track adaptor. H & H2 style adaptor available upon request.

TL95 SERIES



TL95

MINI ADJUSTABLE SIDE SWIVEL

250W MAX.

SPECIFICATIONS

Material

Heavy duty housing designed for commercial use.

Aiming

The secure yoke provides precision aiming without the need for tools.

Lamps

Incandescent or LED (**lamp not included**)

E26 medium base style lamps:


Max 75W PAR16

Max 50W PAR20

Max 75W PAR30

Max 250W PAR38

DIMENSIONS

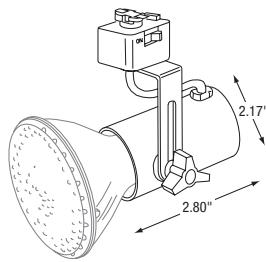

Finishes

Heavy duty scratch resistant powder coated. Available in glossy white, black and silver.

Adaptor

Track heads with "J" adaptor are classified to be used with Stanpro STJ track series, Juno T or TU track series and Prescolite TS or TT track series. Track heads with "H" adaptor are classified to be used with Stanpro STH track series and Cooper Lighting L641/2/3 track series.

ORDERING GUIDE

| TL95 | — | N | 0250 | — | A | — | — | — |
|--------|------------------|----------------|-----------|-----------------------------|-------------------------------|---|---------------|---|
| Series | Lamp type | Watts (W) | Volts (V) | Adaptor | | | Fixture color | |
| TL95 | N - Incandescent | 0250 - 250 max | A - 120 | J - J & J2 track (standard) | H ² - H & H2 Track | | BK - Black | |

¹ **QUICK SHIP:** Not all products are Quick Ship. To view our Quick Ship qualified products, please consult our Quick Ship Product Guide at stanpros.com/quick-ship-product-guide. Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

² Available on request, please contact factory.

COMPATIBLE LAMPS SUGGESTED

Traditional look with an LED lamp!

| Order code | Description | Watts (W) | Base | Volts (VAC) | Color temp. (K) | CRI | Life L70 (hrs) | Lumen output (lm) | Beam angle (°) | CBCP (cd) | Traditional equivalent (W) | Case qty (inner/master) |
|------------|-------------|-----------|------|-------------|-----------------|-----|----------------|-------------------|----------------|-----------|----------------------------|-------------------------|
|------------|-------------|-----------|------|-------------|-----------------|-----|----------------|-------------------|----------------|-----------|----------------------------|-------------------------|

PAR20

| | | | | | | | | | | | | |
|-------|-------------------------------|-----|-----|-----|-------|-----|--------|-----|----|-------|----|-------|
| 67607 | P20/7W/30K/45/DESIGN/STD | 7 | E26 | 120 | 2 700 | 80 | 25 000 | 500 | 45 | 520 | 50 | 10/60 |
| 67608 | P20/7W/40K/45/DESIGN/STD | 7 | E26 | 120 | 3 000 | 80 | 25 000 | 500 | 45 | 520 | 50 | 10/60 |
| 69206 | P20/S2/6.5W/27K/25/CHOICE/STD | 6.5 | E26 | 120 | 2 700 | ≥90 | 25 000 | 514 | 25 | 1 708 | 50 | 1/12 |
| 69207 | P20/S2/6.5W/27K/40/CHOICE/STD | 6.5 | E26 | 120 | 2 700 | ≥90 | 25 000 | 514 | 40 | 914 | 50 | 1/12 |
| 69208 | P20/S2/6.5W/30K/25/CHOICE/STD | 6.5 | E26 | 120 | 3 000 | ≥90 | 25 000 | 554 | 25 | 1 708 | 50 | 1/12 |
| 69209 | P20/S2/6.5W/30K/40/CHOICE/STD | 6.5 | E26 | 120 | 3 000 | ≥90 | 25 000 | 554 | 40 | 914 | 50 | 1/12 |
| 66283 | P20/8W/40K/25/CHOICE/STD | 8 | E26 | 120 | 4 000 | ≥90 | 15 000 | 616 | 25 | 1 708 | 50 | 1/12 |
| 69211 | P20/S2/6.5W/40K/40/CHOICE/STD | 6.5 | E26 | 120 | 4 000 | ≥90 | 25 000 | 575 | 40 | 914 | 50 | 1/12 |



PAR30SN

| | | | | | | | | | | | | |
|-------|-----------------------------|----|-----|-----|-------|-----|--------|-------|----|-------|----|------|
| 67609 | P30S/10W/30K/45/DESIGN/STD | 10 | E26 | 120 | 3 000 | 80 | 25 000 | 750 | 45 | 810 | 60 | 1/20 |
| 67610 | P30S/10W/40K/45/DESIGN/STD | 10 | E26 | 120 | 4 000 | 80 | 25 000 | 750 | 45 | 810 | 60 | 1/20 |
| 69218 | P30S/2/8W/27K/25/CHOICE/STD | 8 | E26 | 120 | 2 700 | ≥90 | 25 000 | 887 | 25 | 3 843 | 75 | 1/6 |
| 66292 | P30S/12W/27K/40/CHOICE/STD | 12 | E26 | 120 | 2 700 | ≥90 | 15 000 | 929 | 40 | 1 740 | 75 | 1/6 |
| 69220 | P30S/2/8W/30K/25/CHOICE/STD | 8 | E26 | 120 | 3 000 | ≥90 | 25 000 | 935 | 25 | 3 843 | 75 | 1/6 |
| 69221 | P30S/2/8W/30K/40/CHOICE/STD | 8 | E26 | 120 | 3 000 | ≥90 | 25 000 | 935 | 40 | 1 740 | 75 | 1/6 |
| 66295 | P30S/12W/40K/25/CHOICE/STD | 12 | E26 | 120 | 4 000 | ≥90 | 15 000 | 1 006 | 25 | 3 843 | 75 | 1/6 |
| 69223 | P30S/2/8W/40K/40/CHOICE/STD | 8 | E26 | 120 | 4 000 | ≥90 | 25 000 | 985 | 40 | 1 740 | 75 | 1/6 |



PAR38

| | | | | | | | | | | | | |
|-------|------------------------------|------|-----|---------|-------|-----|--------|-------|----|-------|-----|------|
| 67613 | P38/15W/30K/45/DESIGN/STD | 15 | E26 | 120 | 3 000 | 80 | 25 000 | 1 200 | 45 | 1 150 | 100 | 1/10 |
| 67614 | P38/15W/40K/45/DESIGN/STD | 15 | E26 | 120 | 4 000 | 80 | 25 000 | 1 200 | 45 | 1 500 | 100 | 1/10 |
| 66297 | P38/16.5W/27K/25/CHOICE/STD | 16.5 | E26 | 120 | 2 700 | ≥90 | 15 000 | 1 360 | 25 | 6 067 | 100 | 1/6 |
| 66298 | P38/16.5W/27K/40/CHOICE/STD | 16.5 | E26 | 120 | 2 700 | ≥90 | 15 000 | 1 398 | 40 | 2 527 | 100 | 1/6 |
| 69226 | P38/S2/13W/30K/25/CHOICE/STD | 13 | E26 | 120 | 3 000 | ≥90 | 25 000 | 1 450 | 25 | 6 067 | 100 | 1/6 |
| 69227 | P38/S2/13W/30K/40/CHOICE/STD | 13 | E26 | 120 | 3 000 | ≥90 | 25 000 | 1 450 | 40 | 2 527 | 100 | 1/6 |
| 69228 | P38/S2/13W/40K/25/CHOICE/STD | 13 | E26 | 120 | 4 000 | ≥90 | 25 000 | 1 490 | 25 | 6 067 | 100 | 1/6 |
| 66302 | P38/16.5W/40K/40/CHOICE/STD | 16.5 | E26 | 120 | 4 000 | ≥90 | 15 000 | 1 510 | 40 | 2 527 | 100 | 1/6 |
| 67914 | P38H0/27W/30K/25/120-277/STD | 27 | E26 | 120-277 | 3 000 | - | 25 000 | 3 000 | 25 | - | 250 | 1/6 |





A MYRIAD OF
CONFIGURATIONS
ARE POSSIBLE




TRACK ACCESSORIES


Track accessories are available in black and in white

TRACK SECTIONS


STJ2-BK: 2' (24") length; 20-1/8" actual length
STJ2-WH: 2' (24") length; 20-1/8" actual length
STJ4-BK: 4' (48") length; 44-1/8" actual length
STJ4-WH: 4' (48") length; 44-1/8" actual length
STJ6-BK: 6' (72") length; 68-1/8" actual length
STJ6-WH: 6' (72") length; 68-1/8" actual length
STJ8-BK: 8' (96") length; 92-1/8" actual length
STJ8-WH: 8' (96") length; 92-1/8" actual length
STJ12-BK: 12' (144") length; 140-1/8" actual length
STJ12-WH: 12' (144") length; 140-1/8" actual length

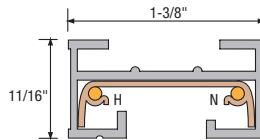

Track J – Track Section View

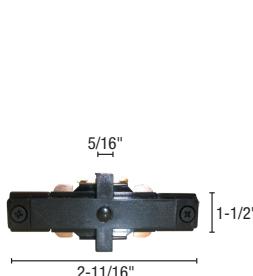

MINI-CONNECTOR
CONDUCTIVE
 ST22-BK
 ST22-WH
 ST22-SI

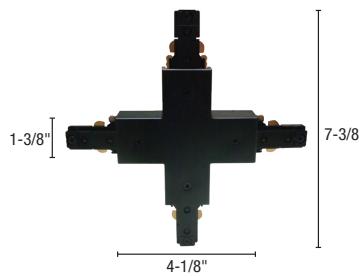


*** X-CONNECTOR**
 ST25-BK
 ST25-WH
 ST25-SI



END FEED
(TOP ACCESS)
 ST38-BK
 ST38-WH
 ST38-SI




FLEXIBLE CONNECTOR
35° to 325° SINGLE CIRCUIT
 ST28-BK
 ST28-WH
 ST28-SI




SURFACE **REVERSE**
CONDUIT **POLARITY**
END FEED ST27A-BK
 ST27-BK ST27A-WH
 ST27-WH ST27A-SI
 ST27-SI

FLOATING FEED
 ST26-BK
 ST26-WH
 ST26-SI

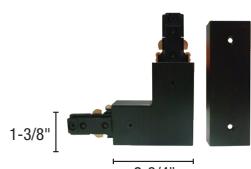

*** THREE WAY «L» JOINER**
 ST23-BK
 ST23-WH
 ST23-SI

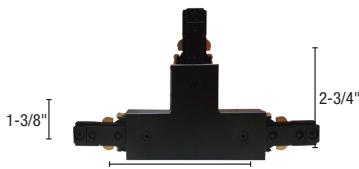


*** T-CONNECTOR** **REVERSE POLARITY**
 ST24-BK ST24B-BK
 ST24-WH ST24B-WH
 ST24-SI ST24B-SI



MONOPPOINT
 ST40-BK
 ST40-WH
 ST40-SI



GROUNDED OUTLET
 ST33-BK
 ST33-WH
 ST33-SI
 Not UL listed



UTILITY HOOK
 ST34-BK
 ST34-WH
 ST34-SI
 (10 lbs capacity)
 Not UL listed
 Non electrical



LINE VOLTAGE EXTENSION
 JLVE-18-WH
 JLVE-24-WH
 JLVE-36-WH

For complete information, refer to www.standardpro.com
 * Can also be used as inline feed.

WE WORK WITH YOU

National account chains have been an important and continued growing part of our business.

For many years, we have integrated our Architectural lighting in projects from small boutiques to large retail chains store and high end car dealerships.

We are able to supply or design custom fixtures to meet these applications needs and now with the merge of the two companies we can add to our current offering accent lighting, LED lamps, and deco fixtures.

Our ever growing architectural lighting offering is the perfect fit for any National and Retail lighting solutions.

