

■ Color Selectable

A versatile LED tube solution that allows you to switch between 5 color temperatures (3 000/3 500/4 000/5 000/6 500 K), making it suitable for a wide range of projects and applications. It's the perfect choice for simplifying inventory management.


■ Full range

Offered in three lengths (2', 3', and 4'), Stanpro provides a complete selection of color-selectable LED T8 A+B lamps, making it the ideal choice for your next project or bulk order.

■ Safety Max[™] and NSF

It is also available with an optional PTFE coating that contains broken glass, making it shatter-resistant and NSF certified. Standard's Safety Max^{TM} coating is the ideal solution for commercial kitchens, art galleries, museums, and schools.

Features

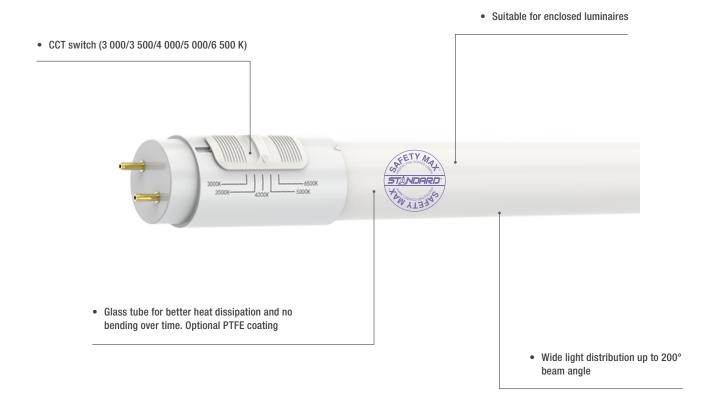


Compatible with a wide range of ballasts under type A installations.

Standard's LED T8 lamps are compatible with a variety of 120-277V and 347V instant start, rapid start and program start ballast. They can also be dimmable depending on the ballast inside the existing fluorescent luminaire.

Consult our ballast compatibility list for more details and a list of ballasts.





Summary Specification Table

Order code	Description	Watts	Volts	Color temp.	Lumen ouput	CRI	Life	Case qty
		(W)	(V)	(K)	(lm)		(hours)	(master)
70581	T8/8W/80/5CCT/24/AB/120-347/STD/SMX	8	120-347	3 000/3 500/4 000/5 000/6 500	1 160	>80	50 000	25
70582	T8/12W/80/5CCT/36/AB/120-347/STD/SMX	12	120-347	3 000/3 500/4 000/5 000/6 500	1 560	>80	50 000	25
70583	T8/14W/80/5CCT/48/AB/120-347/STD/SMX	14	120-347	3 000/3 500/4 000/5 000/6 500	1 900	>80	50 000	25