

PROJECT:
DISTRIBUTOR:
DRAWN BY:

CATALOGUE #:
CONTRACTOR:

DATE:
TYPE:
PO:



STANPRO

SPEC SHEET

FEATURES AND SPECIFICATIONS

CIRCUITRY

- LED ultra bright light source
- 120-347 VAC input
- Maintenance free, 3.6V Ni-cad battery
- Wet location
- IP65
- Operating temperature: 0°C to +40°C




MECHANICAL

- High impact thermoplastic construction
- Test switch and battery charging indicator
- Complete battery recharge in 24 hours
- Ceiling mount, Wall mount
- Fully adjustable, LED heads are standard

APPROVALS

- CSA 22.2 No. 141

TECHNICAL DRAWINGS

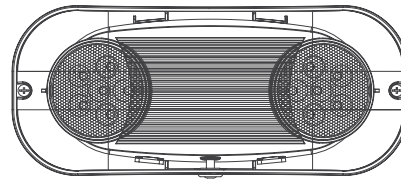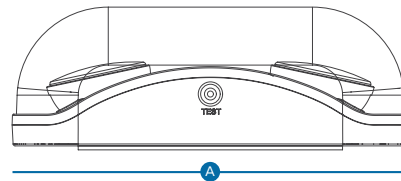

A

B

C

11 3/4"
(30 cm)

4 1/4"
(10.80 cm)

5"
(12.85 cm)

* Please refer to the product web page to view detailed drawings by size.



WET
LOCATION



IP 65



TECHNICAL SPECIFICATION TABLE

Type	Order Code	Series	Number of Heads	Lamp (W)	Light Source	Input Volts (V AC)	Colour
	70683	SLWP-WH	2	1	LED	120-347	White

SPACING GUIDE

Mounting Height (ft)	Spacing Center to Center (ft)
8	26.5
10	24
15	19.5