

PROJECT:  
DISTRIBUTOR:  
DRAWN BY:

CATALOGUE #:  
CONTRACTOR:

DATE:  
TYPE:  
PO:



L2CUB  
LED CUBE LIGHT

**STANPRO**

SPEC SHEET

### 3 CCT AND 3 POWER SELECTABLE

## FEATURES AND SPECIFICATIONS

### CONSTRUCTION

#### Physical Characteristics

- White powder coated painted steel
- Frosted PMMA ribbed lens
- CCT and power select switches are placed discreetly inside the housing

#### Mounting

- Surface


### PERFORMANCE DATA

- Available in 3 000/4 000/5 000 K selectable color temperature
- 80+ CRI
- Electrical ratings: 120-347 V
- Estimated life of over 154 000 hours to L70
- 0-10 V dimming standard (10% - 100%)
- 2 kV surge protection
- Operating temperature: -20 °C to 40 °C (-4 °F to 104 °F)

### COMPLIANCES

- cETLus listed for Canada and USA for damp locations
- DLC Premium and Standard
- Meets requirements of ICES-005 issue 5

## TECHNICAL DRAWINGS

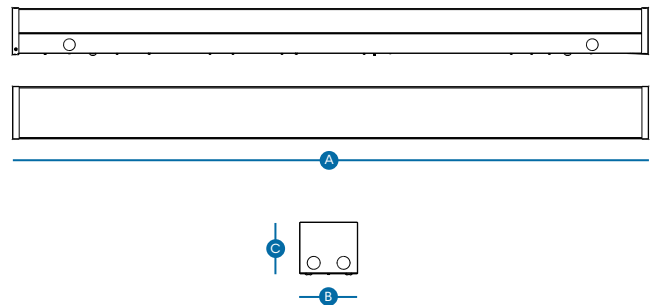

A	B	C	Net Weight (lbs)
48" (121.90 cm)	4" (10.12 cm)	3 1/2" (9.02 cm)	5



3 CCT



POWER  
SELECTABLE



5 YEARS  
WARRANTY



Intertek



DLC  
LISTED  
PREMIUM



DLC  
LISTED

Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products. List at [www.designlights.org/search](http://www.designlights.org/search).

## QUICK SHIP AND TECHNICAL SPECIFICATION TABLE

Type	Order Code	Model Number	Watts (W)	Volts (V AC)	Color Temp. (K) <sup>1</sup>	Lumen Output (lm) <sup>2</sup>	Efficacy (lm/W)	CRI	Life L70 (hrs) <sup>3</sup>	Tested Hours LM-80 (hrs) <sup>3</sup>	Dimming (Yes/No)	PF	THD (%)	Master Case QTY
	70127	L2CUB-48LPS40-Q/3C	22/30/40	120-347	3 000/4 000/5 000	3 274/4 302/5 374	130	80+	154 000	9 000	Yes	0.90	20	6

<sup>1</sup> Typical color temperature range: +/- 5 %.

<sup>2</sup> Lumen values are based on 4 000 K default programming. Please refer to the LUMEN SPECIFICATION TABLE for more details on other color temperatures.

<sup>3</sup> Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

## DLC UNIQUE ID TABLE

Order Code	Model Number	DLC Premium Unique ID		DLC Standard Unique ID	
		Stairwell		Linear Ambient	
<b>70127</b>	L2CUB-48LPS40-Q/3C	S-2H9JW9		S-2MM0QZ	

## LUMEN SPECIFICATION TABLE

Order Code	Model Number	Watts (W)	3 000 K		4 000 K		5 000 K		Default Programming
			Lumen Output (lm)	Efficacy (lm/W)	Lumen Output (lm)	Efficacy (lm/W)	Lumen Output (lm)	Efficacy (lm/W)	
<b>70127</b>	L2CUB-48LPS40-Q/3C	22	3 170	144	3 274	149	3 248	148	40 W / 4 000 K
		30	4 082	136	4 302	143	4 190	140	
		40	5 065	127	5 374	134	5 259	131	