



Project:		Type:	
		7)64.	
Drawn hy:	Catalogue # ·	Date:	

Series Spec Sheet

PRMW

WEATHERPROOF COMBO RUNNING MAN

The PRMW weatherproof Combo is a compact, durable solution designed for dependable performance in wet location environments. Its flame-retardant enclosure features smooth, modern lines, with flexible universal face configurations to suit any installation.

FEATURES AND SPECIFICATIONS

• Circuitry

- LED ultra bright light source
- 120/347 VAC input
- Maintenance free, 3.6V Ni-MH battery
- Wet location
- IP65
- Cold Weather temperature: -25°C to +50°C

Mechanical

- High impact thermoplastic construction
- Universal faces
- Ceiling mount, Wall mount, End mount
- Fully adjustable, LED heads are standard

• Approvals

- CSA 22.2 No. 141

OVERVIEW

Light source	LED
Input voltage (V AC)	120/347
Duration	120 mins
Lumens	260 lumens total
















TECHNICAL SPECIFICATION TABLE

Order Code	Series	Nbr of Face	Nbr of Heads	Lamp (W)	Light Source	Input Volts (V AC)	Colour	Option
70678	PRMW0WH-CW	Universal	2	1	LED	120/347	White	Cold Weather

SPACING GUIDE

Mounting height (ft)	Spacing center to center (ft)
8	32
10	31
15	25

DIMENSIONS

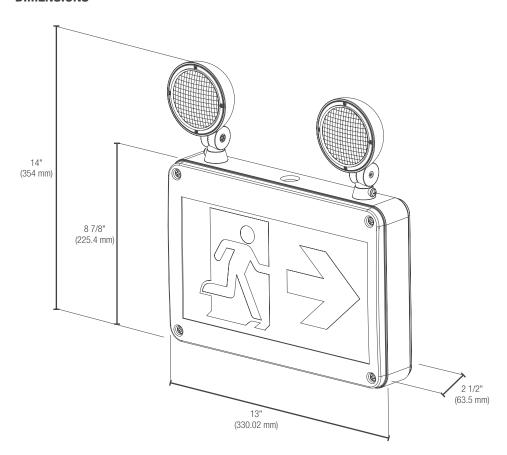

CONFIGURATIONS



Comes standard with three pictogram legends for direction selection.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.



