

PROJECT:
DISTRIBUTOR:
DRAWN BY:

CATALOGUE #:
CONTRACTOR:

DATE:
TYPE:
PO:



STANPRO

SPEC SHEET

DURABLE AND LIGHTWEIGHT DESIGN

FEATURES AND SPECIFICATIONS

CIRCUITRY - AC & AC/DC

- 120-347 V AC Input
- Self-Powered or Universal DC
- Universal DC backup voltage from 6 to 24 V DC
- UDC Signs: +5 to +50°C

CIRCUITRY - SELF-POWERED

- 120-347 V AC Input
- 120 minutes emergency duration
- High-performance, lithium iron phosphate
- Solid state transfer and battery charger
- Self-powered Sign: +5 to +50°C


MECHANICAL

- 10" height pictogram for great visibility
- 16 gauge steel construction
- Single and Double faces
- Universal mounting : ceiling mount, wall mount
- K5 compatible
- White colour standard

APPROVALS

- CSA 22.2 No. 141-15, C860

TECHNICAL DRAWINGS

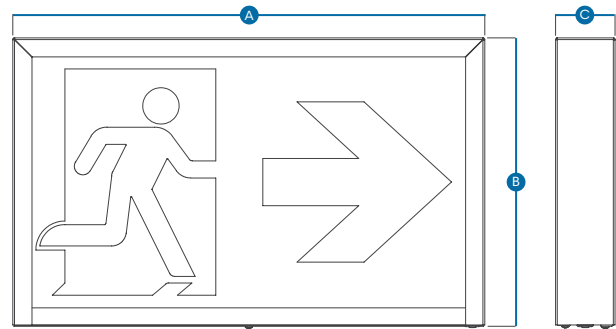

A	B	C
20 7/8" (53.1 cm)	12 3/4" (32.47 cm)	2 5/8" (6.7 cm)

* Please refer to the product web page to view detailed drawings by size.



TYPICAL SPECIFICATION

Supply and install Stanpro RMG Series, all steel 10” Running Man Exit Signs. The sign shall operate with AC/DC 120-347 V AC Input, Emergency DC voltage as follows 6 V to 24 V. The Self powered configuration shall be AC 120-347 V and consist of a long-lasting lithium iron phosphate battery and shall stay illuminated for a minimum of 120 minutes upon AC failure. The face shall be illuminated by using Bridgelux LED ultra-bright light source. The sign shall be suitable for wall or ceiling mount and come complete with 3 Running Man fibers for universal direction. The Exit Running Man Sign shall be CSA 22.2 No. 141-15, C860 certified, ICES 005 compliant and be Stanpro model number RMG_____.

TECHNICAL SPECIFICATION TABLE

Type	Model Number	DC volts (V DC)	Number of Face	Light Source	Input Volts (V AC)	Color
<input type="checkbox"/>	RMGOWH-UDC	UDC	Universal	LED	120-347	White
<input type="checkbox"/>	RMGOWH-IB1	IB1	Universal	LED	120-347	White

FIBERS

Model Number	Description
FIBER-G-B-0	RUNNING MAN 10 INCH NO ARROW
FIBER-G-B-L	RUNNING MAN 10 INCH ARROW LEFT
FIBER-G-B-R	RUNNING MAN 10 INCH ARROW RIGHT
FIBER-J-10-U	RUNNING MAN 10 INCH ARROW UP
FIBER-J-10-D	RUNNING MAN 10 INCH ARROW DOWN
FIBER-J-10-LU	RUNNING MAN 10 INCH ARROW UP LEFT
FIBER-J-10-RU	RUNNING MAN 10 INCH ARROW UP RIGHT
FIBER-J-10-LD	RUNNING MAN 10 INCH ARROW DOWN LEFT
FIBER-J-10-RD	RUNNING MAN 10 INCH ARROW DOWN RIGHT

CONFIGURATIONS



Comes standard with three pictogram legends for direction selection.