

PROJECT:

DISTRIBUTOR:

DRAWN BY:

CATALOGUE #:

CONTRACTOR:

DATE:

TYPE:

PO:



**STANPRO**

SPEC SHEET

## DURABLE AND LIGHTWEIGHT DESIGN

## FEATURES AND SPECIFICATIONS

### CIRCUITRY - AC & AC/DC

- 120/347 or 277 V AC Input
- Self-Powered or Universal DC
- Universal DC backup voltage from 6 to 24 VDC
- UDC Signs: -20 to +40°C

### CIRCUITRY - SELF-POWERED

- 120/347 or 277 V AC Input
- 120 minutes emergency duration
- High-performance, Ni-Cad battery
- Solid state transfer and battery charger
- Self-powered Sign: +10 to +40°C


### MECHANICAL

- 10" height pictogram for great visibility
- 18 gauge steel construction
- Single and Double faces
- Universal mounting : ceiling mount, wall mount, end mount
- White colour standard
- NEMA 3R rated

### APPROVALS

- CSA 22.2 No. 141-15

## TECHNICAL DRAWINGS

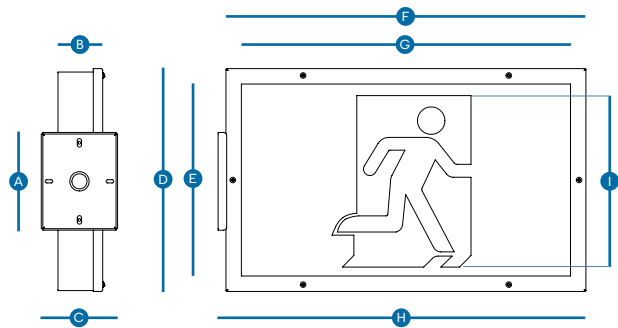

A	B	C	D	E	F	G	H	I
5 11/16"	2 5/18"	4 7/16"	13"	11 3/16"	21"	19 3/16"	21 7/16"	10"
(14.5 cm)	(6.6 cm)	(13.3 cm)	(33 cm)	(28.4 cm)	(53.3 cm)	(48.8 cm)	(54.5 cm)	(25.4 cm)

\* Please refer to the product web page to view detailed drawings by size.



## TYPICAL SPECIFICATION

Supply and install Stanpro RMJ Series, all steel 10" Running Man Exit Signs. The sign shall operate with AC/DC field selectable 120/347 or 277 V AC Input, field selectable Emergency DC voltage as follows 6 V to 24 V. The Self powered configuration shall be AC field selectable 120/347 or 277 V and consist of a long-lasting Nickel-Cadmium battery and shall stay illuminated for a minimum of 120 minutes upon AC failure. The face shall be illuminated by using Nichia LED ultra-bright light source. The sign shall be suitable for wall, end, or ceiling mount and come complete with 3 Running Man fibers for universal direction. The frame and back plate shall each be of a one-piece steel construction, be fully gasketed and come with stainless steel screws. The Exit Running Man Sign shall be CSA 22.2 No.141-15 certified, ICES 005 compliant and be Stanpro model number RMJ\_\_\_\_\_.

## ORDERING GUIDE

Dropdown selections may not display correctly in web browsers. For full functionality, please download the file to use all features.

RMJ				WH			TP
Series	No. of faces	Fiber Direction	Mounting	Colour	DC Voltage	Input Voltage	Options
RMJ	1 Single head	<b>O</b> No indicator <b>L</b> Arrow Left <b>R</b> Arrow Right <b>LRO</b> Arrow Left, Arrow Right, No Arrow <b>D</b> Arrow Down <b>U</b> Arrow Up <b>UR</b> 45° Up Right <b>DR</b> 45° Down Right <b>DL</b> 45° Down Left <b>UL</b> 45° Up Left	<b>CM</b> Ceiling mount <b>WM</b> Wall mount <b>EM</b> End mount	<b>WH</b> White	<b>UDC</b> Universal DC backup voltage from 6 to 24VDC <b>IB1</b> Self powered for 120 min	<b>Blank</b> 120/347 <b>E</b> 277	<b>TP</b> Tamper Proof Screws
	2 Double face	<b>O</b> No indicator <b>LR</b> Arrow Left, Arrow Right <b>D</b> Arrow Down <b>U</b> Arrow Up <b>UR</b> 45° Up Right <b>DR</b> 45° Down Right <b>DL</b> 45° Down Left <b>UL</b> 45° Up Left					

## EMERGENCY LIGHTING OPTIONS

Option	Description
TP	Tamper Proof Screws