

PROJECT:

DISTRIBUTOR:

DRAWN BY:

CATALOGUE #:

CONTRACTOR:

DATE:

TYPE:

PO:

SLA-2L
 SLA-3L
 SLA12-2L
 "EASY OUT"
 STEEL BATTERY UNIT



STANPRO

SPEC SHEET

FEATURES AND SPECIFICATIONS

CIRCUITRY

- 120/347V AC 60Hz input, field selectable
- High efficacy, rapid recovery, precision control charging system
- 6 V DC 36 W or 12 V DC 72 W emergency power output versions (as specified)
- Momentary push button test switch
- Diagnostic/pilot LED for AC ON and CHARGE
- Fully automatic, current limiter charger
- Line latched, low voltage protection
- Solid state design and construction
- Short circuit protection
- Brown out circuit monitors flow of AC current and will energize the battery unit with emergency power when reduction in power occurs
- Temperature compensated
- Complete battery recharge in 24 hours
- Maintenance free, sealed lead acid battery
- Wire connexions provided for remote load


MECHANICAL

- 18 gauge steel construction
- 120V AC line cord installed
- Universal spider knockout pattern and keyhole mounting slots stamped into back of cabinet
- Multiple conduit entry knockouts
- White powder coat finish
- PAR18 small style, high impact thermoplastic heads complete with high output optics
- LED heads with limited lifetime warranty


APPROVALS

- CSA Certified to C22.2 #141-15
- Meets requirements of ICES-005

TECHNICAL DRAWINGS

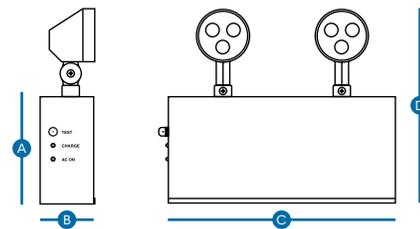

**TYPE N - PAR18
THERMOPLASTIC**



A	B	C	D	E	F
4 7/8" (12.5 cm)	2 1/2" (6.4 cm)	12 1/4" (31.1 cm)	9 3/8" (23.9 cm)	4 1/2" (11.4 cm)	2 5/8" (6.7 cm)

* Please refer to the product web page to view detailed drawings by size.



QUICK SHIP AND TECHNICAL SPECIFICATION TABLE

Type	Model Number	DC Volts (V DC)	Watts (W)	Number of heads	Heads	Lamps (W)	Light Source	Input Volts (V AC)	Color
	SLA-2L	6	36	2	N	2	LED	120/347	White
	SLA-3L	6	36	2	N	3	LED	120/347	White
	SLA12-2L	12	72	2	N	2.5	LED	120/347	White

MODEL RATINGS

Model	Volts (V)	Wattage Capacities (W) ¹			
		30 min.	60 min.	90 min.	120 min.
SLA-2L	6	36	18	12	9
SLA-3L	6	36	18	12	9
SLA12-2L	12	72	36	24	18

¹ It is recommended to load battery pack 20% under their maximum load

WIREGUARD

Model Number	Dimensions (in)
WGD590-V2	16.75 x 17.75 x 6.5

SPACING GUIDE

Mounting height	Wattage Capacities (W)		
	2 W	2.5 W	3 W
8 ft	31	41	78
10 ft	32	37	75
15 ft	23	38	66
20 ft	19	21	59