

Project: _____

Type: _____

Drawn by: _____ Catalogue #: _____

Date: _____

Series Spec Sheet

SLWP

PLASTIC WEATHERPROOF BATTERY UNIT

The SLWP battery unit features a durable plastic enclosure with 5VA flame retardant properties, secured with stainless steel screws for corrosion protection. Its slim, decorative design allows for easy installation. Two fully adjustable, glare-free, round light heads provide reliable emergency illumination.

FEATURES AND SPECIFICATIONS

• Circuitry

- LED ultra bright light source
- 120-347 VAC input
- Maintenance free, 3.6V Ni-cad battery
- Wet location
- IP65
- Operating temperature: 0°C to +40°C

• Mechanical

- High impact thermoplastic construction
- Test switch and battery charging indicator
- Complete battery recharge in 24 hours
- Ceiling mount, Wall mount
- Fully adjustable, LED heads are standard

• Approvals

- CSA 22.2 No. 141

OVERVIEW

Light source	LED
Input voltage (V AC)	120-347
Duration	120 mins
Lumens	180 lumens total



66
wet
location







TECHNICAL SPECIFICATION TABLE

Order Code	Series	Number of Heads	Lamp (W)	Light Source	Input Volts (V AC)	Colour
70683	SLWP-WH	2	1	LED	120-347	White

SPACING GUIDE

Mounting height (ft)	Spacing center to center (ft)
8	26.5
10	24
15	19.5

DIMENSIONS

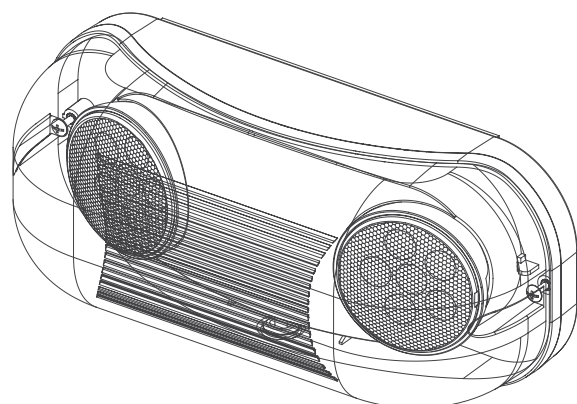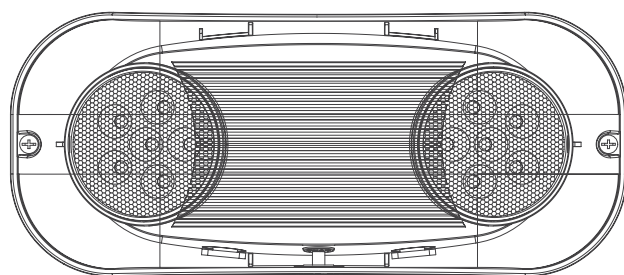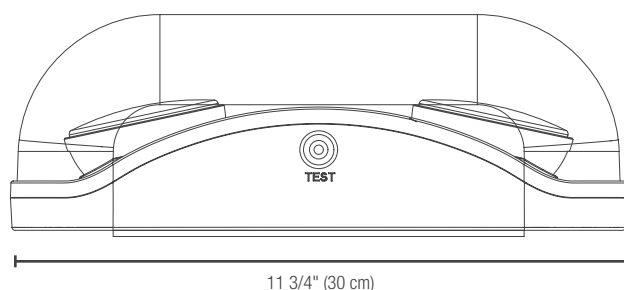

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.