

Project: _____

Type: _____

Drawn by: _____

Catalogue #: _____

Date: _____

Fiche technique de série

SRCR

RECESSED REMOTE

MR16 Recessed Ceiling
Adjustable Gimbal
6 V, 12 V, & 24 V lamps

The SRCR series of commercial recessed MR16 remotes has been designed to blend seamlessly into modern decors. The backbox can be mounted in a variety of ways above suspended or drywall ceilings, leaving only the lamp and compact trim plate visible. Trimplates snap into the housing and come in a variety of colors and finishes. The SRCR is available in 6 V, 12 V, and 24 V models, all utilizing low glare, MR16 LED lamps.

FEATURES AND SPECIFICATIONS

• Mechanical

- Remodeler housing contains self-positioning screw in mounting system that allows for secure installation. The screws are positioned at an angle to assure ease of service
- Steel housing/backbox and trim plate
- Backbox recesses completely above ceiling
- Pre-installed hangers bars adjustable with built-in spike and T-bar clips
- Adjustable gimbal mounted lamp
- White finish, other colors and finishes are optional
- Round trim comes standard, square trim is optional
- MR16 lamp designed with low glare reflector and available in 6 VDC, 12 VDC or 24 VDC

• Compliances

- CSA Certified to C22.2 #141-15
- Meets requirements of ICES-005

OVERVIEW

Light source	LED
Input voltage (VDC)	6, 12, 24



For complete warranty details, please see our terms and conditions on our website.

TYPICAL SPECIFICATION



TYPICAL SPECIFICATION

The fully recessed adjustable gimbal remote heads shall be available for IC inherently protected and remodeler construction and be mounted in a variety of ways above suspended or drywall ceilings, leaving only the lamp and compact trim plate visible. The fully recessed remote shall be designed to accept Stanpro's factory installed high performance MR16 LED lamps (0 V, 0 W, 0 lumens. The LED's, lens and circuit boards shall be designed for the intent of Emergency Lighting to ensure extended life and maximum performance. Remote fixture shall be supplied with a canopy for installation on any four-inch octagon box. The remote fixtures shall be certified to CSA 22.2 No.141-15 and be ICES005 compliant. The recessed remote unit shall be Stanpro model: SRCR_____


Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
All products are subject to change or may be discontinued any time without notice.

ORDERING GUIDE

SRCR	1	—					/		
Series	Number of heads	Volts (VDC operational)	Watts (W)	Type	Color		Options		
SRCR - Remodeler model	1 - Single head	06-24V - 6 to 24	4W - 4 watts	LR - LED	WH - White (standard)	BK - Black	SQ - Square trim ¹		
			5W - 5 watts	LA - LED					
		12-24V - 12 to 24	6W - 6 watts	LA - LED	SP - Custom color (specify)				
			7W - 7 watts						
	1 - Single head	CER - Cerebrum driver	5W - 5 watts	LA - LED					

¹ Square trim only available in White

DIMENSIONS

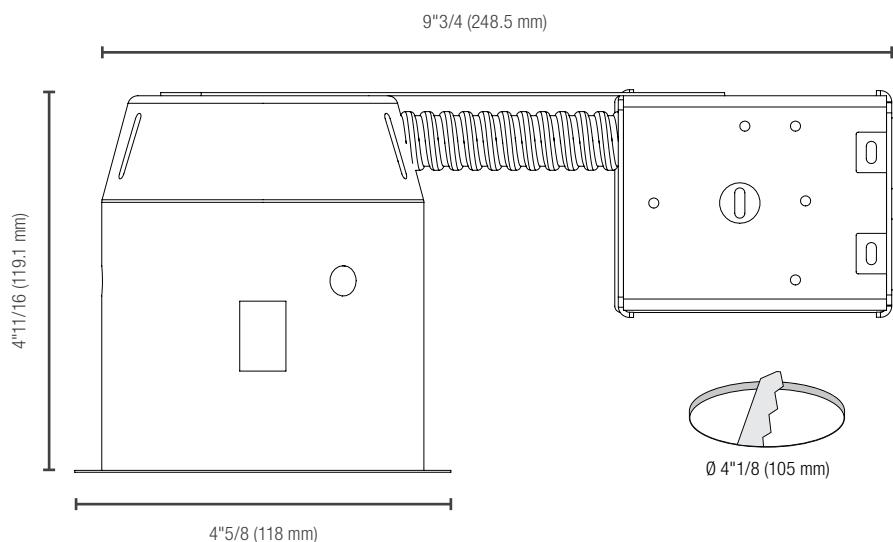

SPACING GUIDE

Mounting height	Spacing center to center (ft)			
	4WLR	5WLA	6WLA	7WLA
8 ft	76	81	94	108
10 ft	79	79	93	106
15 ft	66	62	82	96
20 ft	53	49	73	87

LUMEN TABLE

Watts	Lumens
4W LR	388
5W LA	435
6W LA	507
7W LA	652

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.