

PROJECT:  
DISTRIBUTOR:  
DRAWN BY:

CATALOGUE #:  
CONTRACTOR:

DATE:  
TYPE:  
PO:



**STANPRO**

**SPEC SHEET**

**5 CCT SELECTABLE**

**FEATURES AND SPECIFICATIONS**

**CONSTRUCTION**

**Physical Characteristics**

- White aluminum trim finish
- Available in 4" and 6" round
- 110° beam angle
- Frosted polycarbonate lens
- CCT selectable switch is placed on the back of the LED module
- FT4 cable rating

**Mounting**

- LED module with LED driver easily installs with included quick connect wire
- Torsion spring mounting clips


**PERFORMANCE DATA**

- Available in 2 700/3 000/3 500/4 000/5 000 K selectable color temperature
- 90+ CRI for true color accuracy
- Electrical ratings: 120 V
- Estimated life of over 50 000 hours to L70
- Phase cut (ELV / Triac) dimming standard
- Operating temperature: -30 °C to 45 °C (-22 °F to 113 °F)

**COMPLIANCES**

- cETLus listed for wet locations
- Energy Star
- Meets requirements of ICES-005 issue 5 class B for use in residential applications
- IC rated for direct contact with insulation
- Airtight as per ASTM E283 standard

**TECHNICAL DRAWINGS**

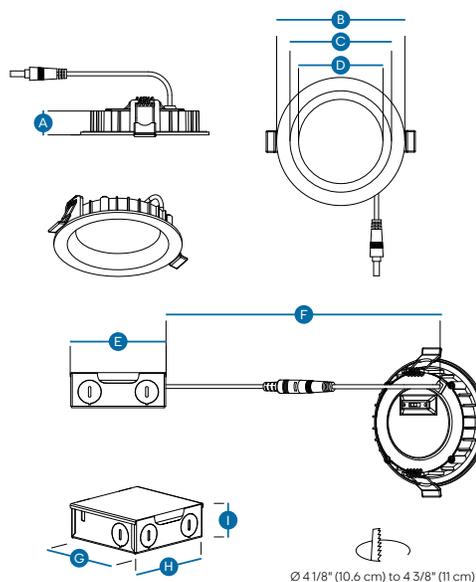

Size	A	B	C	D	E	F	G	H	I	Net Weight (lbs)
4"	7/8" (2.2 cm)	Ø 4 3/4" (12 cm)	Ø 3 3/4" (9.5 cm)	Ø 3 1/8" (7.9 cm)	3 1/2" (9 cm)	17 3/4" (45 cm)	3 3/8" (8.6 cm)	3 1/2" (9 cm)	1 1/4" (3.3 cm)	0.91
6"	1 1/8" (2.8 cm)	Ø 6 3/4" (17 cm)	Ø 5 5/8" (14.4 cm)	Ø 5" (12.7 cm)	3 1/2" (9 cm)	17 3/4" (45 cm)	3 3/8" (8.6 cm)	3 1/2" (9 cm)	1 1/4" (3.3 cm)	1.08

\* Please refer to the product web page to view detailed drawings by size.



## QUICK SHIP AND TECHNICAL SPECIFICATION TABLE

Type	Order Code	Model Number	Watts (W)	Volts (VAC)	Color Temp. (K) <sup>1</sup>	Lumen Output (lm) <sup>2</sup>	Efficacy (lm/W)	CRI	Life L70 (hrs) <sup>3</sup>	Beam Angle (°)	Power Factor	THD (%)	Master Case QTY
<b>4"</b>													
	70026	LPDL4R/RG-9A-5CWH	9	120	2 700/3 000/3 500/4 000/5 000	750	83.3	90+	50 000	110	>0.9	<20	24
<b>6"</b>													
	70027	LPDL6R/RG-12A-5CWH	12	120	2 700/3 000/3 500/4 000/5 000	1200	100	90+	50 000	110	>0.9	<20	24

<sup>1</sup> Typical color temperature range: +/- 5 %.

<sup>2</sup> Lumen values are derived from Energy Star reported data. Initial lumens range: +/- 10 %.

<sup>3</sup> Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

## LUMEN SPECIFICATION TABLE

Order Code	Model Number	Watts (W)	2 700 K		3 000 K		3 500 K		4 000 K		5 000 K		Default Programming
			Lumen Output (lm)	Efficacy (lm/W)									
<b>70026</b>	LPDL4R/RG-9A-5CWH	9	721	80	737	82	769	85	777	86	780	87	2 700K
<b>70027</b>	LPDL6R/RG-12A-5CWH	12	1032	86	1038	87	1064	89	1082	90	1093	91	2 700K

## ACCESSORIES

Order Code	Model Number	Type	Inner diameter (in)	Opening diameter (in)	Case qty (master)
<b>66821<sup>1</sup></b>	ACC/MPLATE/4.25IN/HANG.BARS/STD	Mounting plate with hanger bars	4 1/4	-	24
<b>66058</b>	ACC/MPLATE/4.25/ADJ/STD	Adjustable mounting plate	4 1/4	-	24
<b>66051</b>	ACC/MPLATE/4.25/SQR/STD	Square mounting plate	4 1/4	-	96
<b>66143</b>	ACC/4/VAPOR BARRIER/STD	Vapor barrier extender	4 1/4	-	50
<b>68986</b>	GOOF RING-4.25IN	Goof rings	4 1/4	6 1/2	120
<b>66822<sup>1</sup></b>	ACC/MPLATE/6.25IN/HANG.BARS/STD	Mounting plate with hanger bars	6 1/4	-	25
<b>64921</b>	RF/ACC/6/MOUNT.PLATE/ADJ/STD	Adjustable mounting plate	6 1/4	-	24
<b>64263</b>	ACC/MPLATE/6.25IN/SQR/STD	Square mounting plate	6 1/4	-	96
<b>66144</b>	ACC/6/VAPOR BARRIER/STD	Vapor barrier extender	6 1/4	-	50
<b>68987</b>	GOOF RING-6.25IN	Goof rings	6 1/4	7 7/8	120
<b>64264<sup>2</sup></b>	LPDL/ACC/6FT/EXTCABLE/STD	6' extension cord	-	-	96

<sup>1</sup> Includes brackets and screws.

<sup>2</sup> Up to 6 FT4 extension cords can be connected together.

## COMPATIBLE DIMMERS<sup>1</sup>

Brand	Model
<b>Legrand</b>	RH730PTUTC
<b>Cooper</b>	AAL06, DAL06P, SAL06P3
<b>Leviton</b>	6615, 6674, DDMX1, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ, IPL06
<b>Lutron</b>	AYCL-253P, CTCL-153P, DVCL-153P, DVCL-253P, DVELV-300P, HCL453P, MACL-153P, PD-6WCL, SELV-300P

**Dimming range:** 10 %-100 %

<sup>1</sup> This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.