

PROJECT:

DISTRIBUTOR:

DRAWN BY:

CATALOGUE #:

CONTRACTOR:

DATE:

TYPE:

PO:



PRMTA  
HIGH-END ACRYLIC  
RECESSED EDGELIT COMBO

**STANPRO**

SPEC SHEET

## FEATURES AND SPECIFICATIONS

### CIRCUITRY

- LED ultra bright light source
- 120-347 VAC
- 2x 1W high-output LED heads producing 260 lumens
- Maintenance free, 3.6V Ni-Cad battery
- 120 minutes emergency duration
- Damp location
- Operating temperature: +10°C to +40°C

### MECHANICAL

- Aluminum housing
- Universal faces
- Recessed mount only
- White colour is standard
- Fully adjustable, LED heads



### SPECIFICATIONS

- Trim and housing made of high grade aluminum
- Backbox made of galvanized steel
- All electronics and faceplate mounted to single chassis for rapid and simple installation
- Hanger bars for drywall ceilings or walls included. Maximum extension of 540 mm
- White powder coat finish standard

### COMPLIANCE

- Meets requirements of ICES-005
- CSA Certified to C22.2 #141-15
- CSA Certified to C860-1

## TECHNICAL DRAWINGS

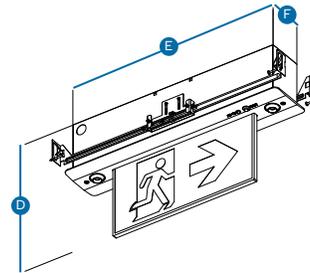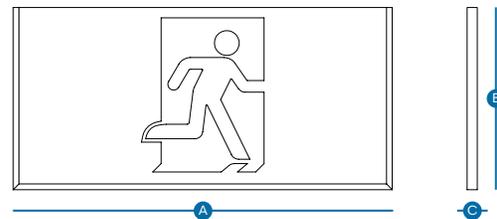

A	B	C	D	E	F
13" (33 cm)	6 1/4" (15.90 cm)	3/8" (0.90 cm)	10 5/8" (26.99 cm)	18 1/2" (47.15 cm)	3 1/8" (7.94 cm)

\* Please refer to the product web page to view detailed drawings by size.



ICES  
005



Energy Verified  
Énergie Vérifiée

## TYPICAL SPECIFICATION

Supply and install Stanpro PRMTA Series, The Running Man Edgelit Combination Exit Sign shall operate with AC/DC field selectable 120-347 V AC Input. The Self powered configuration shall be AC field selectable 120-347 V and consist of a long lasting Nickel-Cadmium battery and shall stay illuminated for a minimum of 120 minutes upon AC failure. The face shall be illuminated by using LED ultra-bright light source. The sign shall be suitable for recessed mount and come complete with acrylic Running Man fibers for universal direction. The frame shall be extruded aluminum and come complete with an acrylic face plate for maximum uniformity. The Exit Running Man Combination Sign shall be CSA 22.2 No.141-15 certified, ICES 005 compliant and be Stanpro model number PRMTA\_\_\_\_\_.

## ORDERING GUIDE

PRMTA			1W	WH
Series	Number of Faces	Fiber Direction	Lamp	Color
PRMTA	1 - Single face	<b>O</b> - No indicator <b>L</b> - Arrow left <b>R</b> - Arrow right <b>LRO</b> - Arrow left, Arrow right, No arrow <b>D</b> - Arrow down <b>U</b> - Arrow up <b>UR</b> - 45° Up right <b>DR</b> - 45° Down right <b>DL</b> - 45° Down left <b>UL</b> - 45° Up Left	1W - 1W	WH - White
	2 - Double face	<b>O</b> - No indicator <b>LR</b> - Arrow left, Arrow right, No arrow <b>D</b> - Arrow down <b>U</b> - Arrow up <b>UR</b> - 45° Up right <b>DR</b> - 45° Down right <b>DL</b> - 45° Down left <b>UL</b> - 45° Up Left		

## FIBERS

Model Number	Description
<b>FIBER-TA-1F-0</b>	Running man single face no arrow
<b>FIBER-TA-1F-L</b>	Running man single face arrow left
<b>FIBER-TA-1F-R</b>	Running man single face arrow right
<b>FIBER-TA-2F-0</b>	Running man double face no arrow
<b>FIBER-TA-2F-LR</b>	Running man double face left&right arrow

## SPACING GUIDE

Mounting Height	Spacing Center to Center (ft)
<b>8</b>	40
<b>10</b>	39
<b>15</b>	34
<b>20</b>	24