

PROJECT: _____ DATE: _____

DISTRIBUTOR: _____ CATALOGUE #: _____ TYPE: _____

DRAWN BY: _____ CONTRACTOR: _____ PO: _____



STANPRO

SPEC SHEET

FEATURES AND SPECIFICATIONS

CIRCUITRY

- 120-347 VAC input
- 6 VDC 27 W emergency power output versions
- 120 minutes emergency power duration as a standalone unit
- Momentary push button test switch
- Pilot LED for AC ON and CHARGE
- Fully automatic, current limiter charger
- Solid state design and construction
- Complete battery recharge in 24 hours
- Maintenance free, sealed lead acid battery


MECHANICAL

- 20 gauge steel construction
- Universal spider knockout pattern stamped into backplate for junction box mounting
- Universal models include ceiling or end mount, field installable canopy kit c/w spider plate

COMPLIANCES

- CSA Certified to C22.2 #141
- Meets requirements of ICES-005

TECHNICAL DRAWINGS

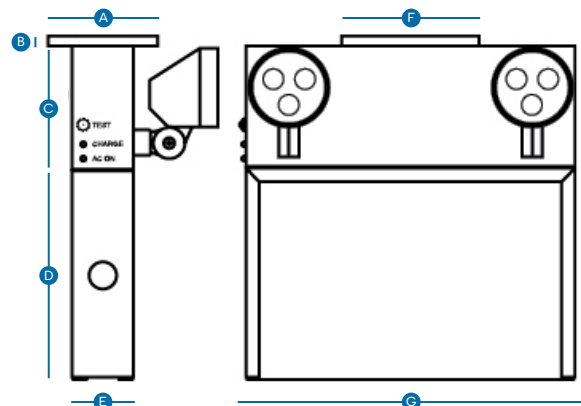

A	B	C	D	E	F	G
4 3/8" (11.13 cm)	3/8" (0.97 cm)	4 7/8" (12.40 cm)	7 3/4" (19.68 cm)	2 1/4" (5.72 cm)	5 5/8" (14.30 cm)	12" (30.48 cm)

* Please refer to the product web page to view detailed drawings by size.



TECHNICAL SPECIFICATION TABLE

Type	Order Code	Series	DC Volts (VDC)	Watts (W)	Number of Face	Number of Heads	Lamp (W)	Light Source	Input Volts (V AC)	Colour
	70625	PRS2	6	27	Universal	2	2	LED	120-347	White



Comes standard with three pictogram legends for direction selection.

INCLUDED IN THE BOX

SPACING GUIDE

Mounting Height	Spacing Center to Center (ft)
8ft	41.5
10ft	37.5
15ft	30
20ft	25.5

WIREGUARD

	Model Number	Dimensions
Wall mount	WGD510-V2	19.75" x 19.75" x 7.25"
Ceiling mount	WGD650-V2	17.75" x 17.75" x 16.50"
End mount	WGD650-V2	17.75" x 17.75" x 16.50"