

PROJECT:

DISTRIBUTOR:

DRAWN BY:

CATALOGUE #:

CONTRACTOR:

DATE:

TYPE:

PO:



STANPRO

SPEC SHEET

120/277/347 VAC

FEATURES AND SPECIFICATIONS

ELECTRICAL CIRCUITRY - AC & AC/DC

- LED ultra bright light source
- Transformer driven sign
- 120/277/347 VAC Input, field selectable
- Power consumption: **120 V** = 0.032 A/2.1 W;
277 V = 0.008 A/1.5 W; **347 V** = 0.012 A/2.0 W
- Power consumption in Emergency mode: **6 VDC** = 0.9 W;
12 VDC = 0.8 W; **24 VDC** = 1.2 W

CIRCUITRY - CEREBRUM

- Emergency DC wattage as follow:
24 VDC = 0.10 A/2.4 W
- This unit can be connected to Cerebrum's smart battery unit. Please view the Cerebrum brochure for more details on this technology

ELECTRICAL SELF-POWERED

- LED ultra bright light source
- 90 or 120 minutes emergency duration
- 120/277/347 VAC Input, field selectable
- Power consumption: **120 V** = 0.030 A/2.70 W;
277 V = 0.010 A/2.18 W; **347 V** = 0.012 A/2.64 W
- High-performance Ni-Cad battery


MECHANICAL

- High impact, UV stabilized, thermoplastic construction
- Well suited for damp locations
- White color is standard
- Universal mounting: ceiling mount, wall mount, end mount

APPROVALS

- CSA Certified to C22.2 #141-15
- CSA Certified to C860-11

TECHNICAL DRAWINGS

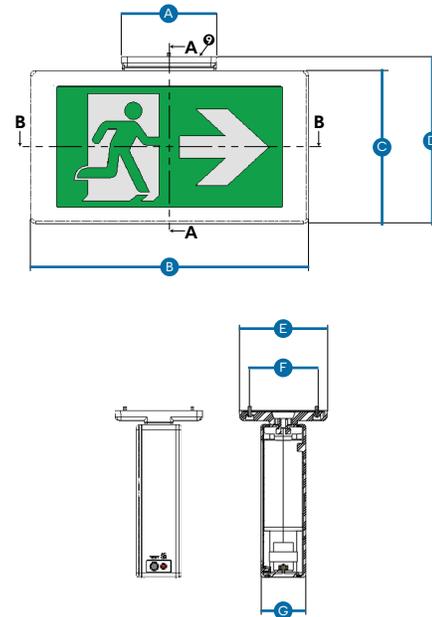

A	B	C	D	E	F	G	Net Weight (lbs)
4 3/4" (12 cm)	13 3/4" (35 cm)	7 1/2" (19.17 cm)	8 1/4" (20.90 cm)	4 3/8" (11 cm)	3 1/4" (8.40 cm)	2 1/4" (5.60 cm)	2.6

* Please refer to the product web page to view detailed drawings by size.



QUICK
SHIP



Energy Verified
Energie Vérifiée

TYPICAL SPECIFICATION

Supply and install Stanpro RMPS Series, low profile, all plastic Running Man Exit Signs. The sign shall operate with AC/DC field selectable 120/277/347 V AC Input, field selectable Emergency DC voltage as follows 6 V 0.9 W, 12 V 0.9 W, 24 V DC 0.9 W. The Self powered configuration shall be AC field selectable 120/277/347 V and consist of a long lasting Nickel-Cadmium battery and shall stay illuminated for a minimum of 120 minutes upon AC failure. The face shall be illuminated by using Nichia LED ultra-bright light source. The sign shall be suitable for wall, end, or ceiling mount and come complete with 3 Running Man fibers for universal direction. The frame and canopy shall not exceed 8 1/4" and shall be constructed of a rigid plastic construction. The Exit Running Man Sign shall be CSA 22.2 No.141-15 certified, ICES 005 compliant and be Stanpro model number RMPS_____.

QUICK SHIP AND TECHNICAL SPECIFICATION TABLE

Type	Model Number	DC Volts (VDC)	Number of Faces	Light Source	Input Volts (VAC)	Color
	RMPS0WH-IB	IB	Universal	LED	120/277/347	White
	RMPS0WH-UDC	UDC	Universal	LED	120/277/347	White

ORDERING GUIDE

RMPS	WH	DC Output	Options
Series	Number of Faces ¹ and Mounting	Color	
RMPS	<ul style="list-style-type: none"> 0 - Universal 1 - Single face¹ 2 - Double face¹ 	<ul style="list-style-type: none"> WH - White 	<ul style="list-style-type: none"> UDC - Universal DC backup voltage from 6 to 24 VDC IB - Self-powered for 90 minutes IB1 - Self-powered for 120 minutes CER - Cerebrum driver
			<ul style="list-style-type: none"> WGD - Wireguard (separate order)² 0 - No indicators (double face only) <ul style="list-style-type: none"> ↓ ↑ ↗ ↘ ↙ ↘ D U UR DR DL UL

¹ Unit comes standard as universal face. Single face or double face should only be specified when choosing nonstandard fibers.
² Specify mounting.

WIREGUARD

	Model Number	Dimensions (in)
Wall mount	WGD520-V2	15.75 x 11.5 x 4.5
Ceiling mount	WGD540	14.5 x 6.25 x 10.5
End mount	WGD650-V2	17.75 x 17.75 x 16.50

LEXAN GUARD

	Model Number	Dimensions (in)
Wall mount	PGD107	14.5 x 11.25 x 5.5
Ceiling mount	PGD100	16 x 10 x 13.5
End mount	PGD106	5.5 x 9.25 x 18.5

CONFIGURATIONS



Comes standard with three pictogram legends for direction selection.



For double face no arrow options, select "0" on the options column.