

PROJECT:
DISTRIBUTOR:
DRAWN BY:

CATALOGUE #:
CONTRACTOR:

DATE:
TYPE:
PO:



STANPRO
SPEC SHEET

FEATURES AND SPECIFICATIONS

CIRCUITRY - AC

- 120-347 VAC input
- Emergency DC wattages as follows:
6 VDC = 1W, 12 VDC = 1W, 24 VDC = 1W

CIRCUITRY - SELF-POWERED

- 120-347 VAC input
- Ni-Cad battery
- 120 minutes emergency duration
- Solid state transfer and battery charger


MECHANICAL

- 20 gauge steel housing
- Universal faces
- Universal mounting: ceiling mount, wall mount, end mount

COMPLIANCES

- CSA Certified to C22.2 #141
- Meets requirements of ICES-005

TECHNICAL DRAWINGS

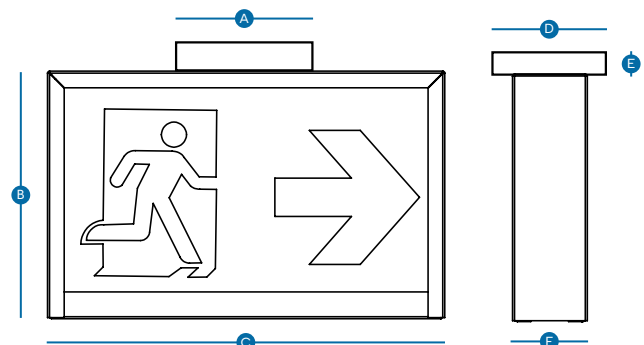

A	B	C	D	E	F
5" (12.80 cm)	7 5/8" (19.35 cm)	12 1/4" (31.10 cm)	4 5/8" (11.80 cm)	3/8" (0.95 cm)	2 1/4" (5.85 cm)

* Please refer to the product web page to view detailed drawings by size.



TECHNICAL SPECIFICATION TABLE

Type	Order Code	Series	DC Volts (VDC)	Number of Face	Light Source	Input Volts (V AC)	Colour
	70627	RMSA-UDC	UDC	Universal	LED	120-347	White
	70629	RMSA-IB1	IB1	Universal	LED	120-347	White



Comes standard with three pictogram legends for direction selection.

INCLUDED IN THE BOX