

PROJECT:
DISTRIBUTOR:
DRAWN BY:

CATALOGUE #:
CONTRACTOR:

DATE:
TYPE:
PO:



STANPRO
SPEC SHEET

FEATURES AND SPECIFICATIONS

CIRCUITRY

- 120-347 VAC input
- 6 VDC 27 W emergency power output versions
- Momentary push button test switch
- Pilot LED for AC ON and CHARGE
- Fully automatic, current limiter charger
- Solid state design and construction
- Complete battery recharge in 24 hours
- Maintenance free, sealed lead acid battery
- Wire connections provided for remote load


MECHANICAL

- 20 gauge steel construction
- 120 VAC line cord supplied loose in the box
- Universal spider knockout pattern and keyhole mounting slots stamped into back of cabinet
- Multiple conduit entry knockouts

COMPLIANCES

- CSA Certified to C22.2 #141
- Meets requirements of ICES-005

TECHNICAL DRAWINGS

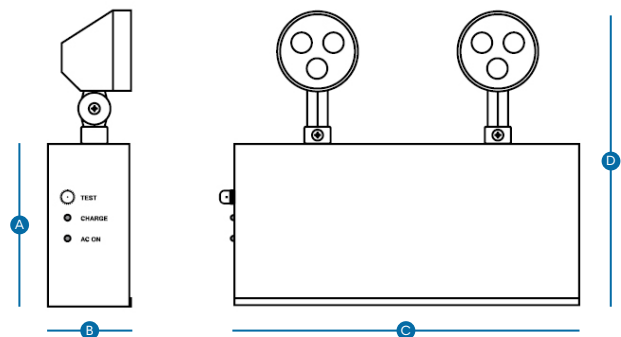

A B C D

4 7/8"
(12.50 cm)

2 1/2"
(6.40 cm)

12 1/4"
(31.10 cm)

9 3/8"
(23.90 cm)

* Please refer to the product web page to view detailed drawings by size.



TECHNICAL SPECIFICATION TABLE

Type	Order Code	Series	DC Volts (VDC)	Watts (W)	Number of Heads	Lamp (W)	Light Source	Input Volts (V AC)	Colour
	70623	SL2	6	27	2	2	LED	120-347	White

SPACING GUIDE

Mounting Height	Spacing Center to Center (ft)
8ft	41.5
10ft	37.5
15ft	30
20ft	25.5

WIREGUARD

Model Number	Dimensions
WGD590-V2	17.75" x 16.75" x 6.5"