

PROJECT:
DISTRIBUTOR:
DRAWN BY:

CATALOGUE #:
CONTRACTOR:

DATE:
TYPE:
PO:



STANPRO

SPEC SHEET

FEATURES AND SPECIFICATIONS

CIRCUITRY

- 120-347 VAC Input
- Solid state variable rate charger
- 120 minutes emergency power duration
- Momentary push button test switch
- Pilot LED for AC ON and CHARGE status
- Fully automatic, current limiter charger
- Short circuit protection
- 6.4V maintenance free, lithium iron phosphate battery



MECHANICAL

- Thermoplastic construction
- 2x 4 W LED
- Lamp heads provide up to 134ft
- Wall and ceiling mount
- White colour standard

APPROVALS

- CSA C22.2 #141

TECHNICAL DRAWINGS

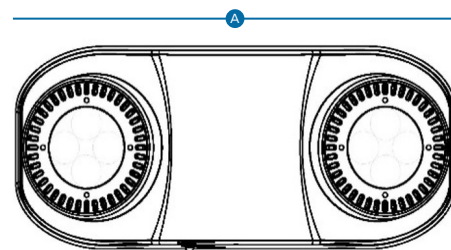

A

B

C

10 5/8"
(27 cm)

3 3/8"
(8.53 cm)

4 7/8"
(12.4 cm)

* Please refer to the product web page to view detailed drawings by size.



TECHNICAL SPECIFICATION TABLE

Model Number	No. of Heads	Lamp (W)	Light Source	Input Volts (V AC)	Colour
SLHP-5L	2	4	LED	120-347	White

SPACING GUIDE

Mounting Height	Spacing center to center (ft)
8 ft	134
10 ft	132.5
15 ft	121

LUMEN TABLE

Description	Watt	Lumen	Lumen per Watt
SLHP-5L	8	1160	145