

PROJECT:

DISTRIBUTOR:

DRAWN BY:

CATALOGUE #:

CONTRACTOR:

DATE:

TYPE:

PO:



STANPRO

SPEC SHEET

FEATURES AND SPECIFICATIONS

ELECTRICAL AND CIRCUITRY

- 6 VDC, 12 VDC or 24 VDC
- LED lamps

CIRCUITRY - CEREBRUM

- This unit can be connected to Cerebrum's smart battery unit. Please view the Cerebrum brochure for more details on this technology

MECHANICAL

- Polycarbonate enclosure is fully gasketed around lens and canopy to prevent water infiltration
- Stainless steel tamper proof screws and bits
- Wet location
- Lamps are fully adjustable
- Fully gasketed housing
- Available in white and black
- Universal spider knockout pattern stamped into backplate for junction box mounting
- For surface or suspended conduit mount use accessory JB031

AMBIENT TEMPERATURE

- -35 °C to +40 °C


APPROVALS

- CSA Certified to C22.2 #141-15
- CSA Certified type 2, 3, 3R, 4, 4X, 5, 12 or 12 K
- CSA Certified to NSF 2
- IP66
- IK10

COMPLIANCE

- Meets requirements of ICES-005

TECHNICAL DRAWINGS

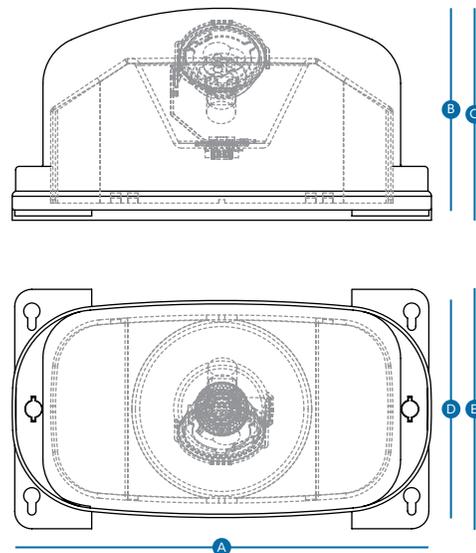

Type	A	B	C	D	E
Single Head	9 5/8" (24.50 cm)	4 5/8" (11.80 cm)	4 7/8" (12.40 cm)	5" (12.70 cm)	5 1/2" (14 cm)
Double Heads	9 5/8" (24.50 cm)	4 5/8" (11.80 cm)	4 7/8" (12.40 cm)	5" (12.70 cm)	5 1/2" (14 cm)

* Please refer to the product web page to view detailed drawings by size.



ICES
005



SANITATION
NSF/ANSI 2

TYPICAL SPECIFICATION

Remote head shall be completely protected from the elements within a fully gasketed polycarbonate housing, be fully adjustable both tilt and swivel and have a universal spider knockout pattern stamped into back plate for junction box mounting. The SWN shall be () V, () W, () lumens. The MR16 LED's lamps shall be fully integrated in the molded shell to ensure extended life and maximum performance. The remote fixtures shall be certified to CSA 22.2 No.141-15, CSA Certified type 2, 3, 3R, 4, 4X, 5, 12, CSA Certified to NSF 2, IP66, IK10 and be ICES005 compliant. The remote unit shall be Stanpro model: SWN _____

ORDERING GUIDE - LED

SWN Series	Number of Heads	Volts (VDC Operational)	Watts (W)	Lamp Type	Color
SWN	1 Single head 2 Double head	06-24 6 VDC to 24 VDC operational	4W	LR	BK Black WH White
			5W	LA	
	12-24 12 VDC to 24 VDC operational	6W	LA		
		7W	LA		
	1 Single head 2 Double head	CER Cerebrum driver	5W	LA	
			2.5W 5W		

LEXAN GUARD

Mounting Type	Model Number	Dimensions (in)
Wall Mount	PGD104	14 x 7.25 x 7.5

ACCESSORIES*

Model Number	Type
JB031	4-inch octagonal PVC box with 5 x 1/2 inch threaded hubs

* Order separately.

LUMEN TABLE

Watts	Lumens
4W LR	388
5W LA	435
6W LA	507
7W LA	652

SPACING GUIDE

Mounting Height	Spacing Center to Center (ft)			
	4WLR	5WLA	6WLA	7WLA
8 ft	76	81	94	108
10 ft	79	79	93	106
15 ft	66	62	82	96
20 ft	53	49	73	87

