

Series Spec Sheet

VIVIO GEN. 2

4" LED DOWNLIGHT WITH DUAL INSTALLATION

The Vivio Downlight is a 4" luminaire that can be used as a retrofit solution in an existing recessed housing or surface mounted directly onto an octagon junction box. With its low profile design, it brings a sleek and simple look that can adapt to any application. The color temperature can be changed at any time with a simple switch installed at the back of this fixture.

FEATURES AND SPECIFICATIONS

• Construction

Physical Characteristics

- White finish
- Frosted glass lens
- Magnetic black trim sold separately as an accessory
- Available in 4" round
- 110° beam angle
- CCT switch is discretely placed on the side of the LED module

Mounting

- Dual installation: Retrofit in 4" recessed housing or surface mount directly onto 4" octagonal junction box
- Fire-rated when used in a fire-rated octagonal junction box

• Performance data

- Available in 2 700/3 000/3 500/4 000/ 5 000 K selectable color temperature
- 90+ CRI
- Estimated lifespan of 50 000 hours to L70
- Phase cut (ELV / Triac) dimming standard
- Operating temperature:
 - 30 °C to 40 °C (-22 °F to 104 °F)

• Box contents

- LED Module
- Magnetic White trim
- E26 adapter
- Mounting clips
- Screws

• Compliances

- cETLus for wet locations
- cETLus listed and classified
- Energy Star
- Meets requirements of ICES-005 issue 5 class B for use in residential applications
- IC rated for direct contact with insulation
- Airtight as per ASTM E283 standard



OVERVIEW

Light source	LED
Watts (W)	8
Lumen output (lm)	706 - 778
Efficiency (lm/W)	88 - 97
Color temperature (K)	2 700/3 000/3 500/4 000/5 000
CRI	90+

QUICK SHIP AND TECHNICAL SPECIFICATION TABLE

Order code	Model number	Watts (W)	Volts (VAC)	Color temp. (K) ¹	Lumen output (lm) ²	Efficiency (lm/W)	CRI	Life L70 (hrs) ³	Beam angle (°)	Finish	Power factor	THD (%)	Master case qty
70570	VDL4R-G2-08A-5C	8	120	2 700/3 000/3 500/4 000/5 000	720	90	90+	50 000	110	White	>0.9	<20	24

¹ Typical color temperature range: +/- 5 %.
² Lumen values are derived from Energy Star reported data. Initial lumens range: +/- 10 %.
³ Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

LUMEN SPECIFICATION TABLE

Order code	Model number	Watts (W)	2 700 K		3 000 K		3 500 K		4 000 K		5 000 K	
			Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)
70570	VDL4R-G2-08A-5C	8	706	88	739	92	776	97	778	97	760	95

DEFAULT PROGRAMMING
2 700K

ACCESSORY (order separately)

Order code	Model number	Type	Finish	Compatible with		Master case qty
68032	VDL4R-TRIMBK	Magnetic Trim	Black	68031	VDL4R-08A/5C	96




BOX CONTENT




DUAL INSTALLATION


JUNCTION BOX



RETROFIT

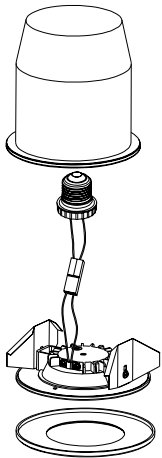

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.

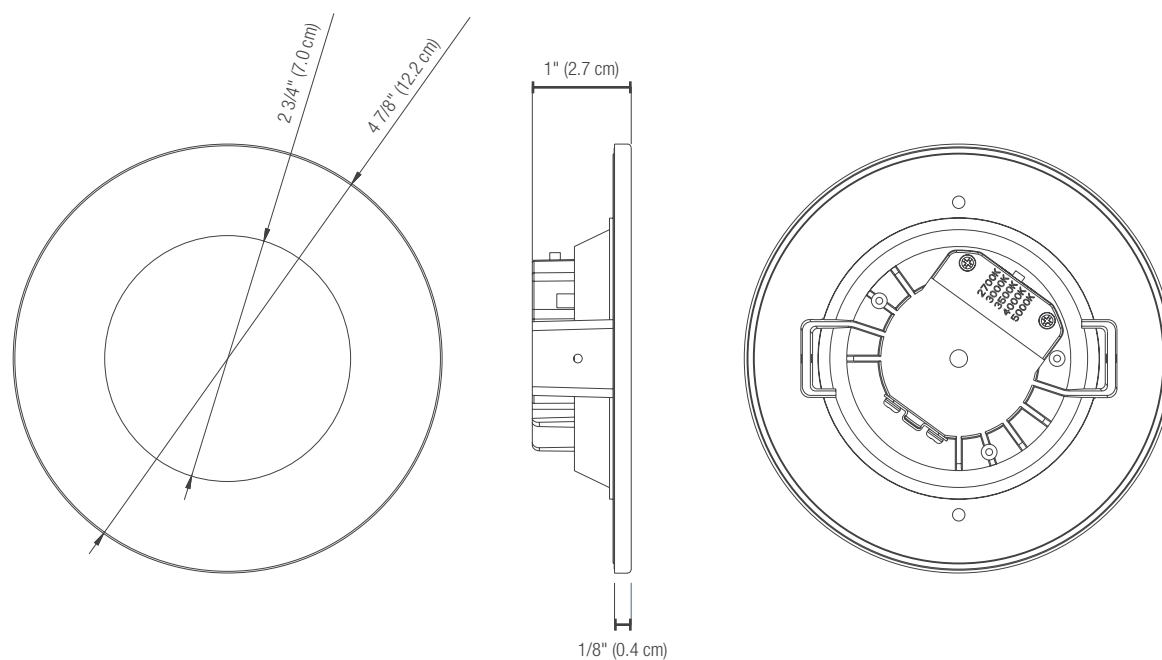DIMENSIONS AND WEIGHTS


Net weight (lbs)	0.50
------------------	------

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
All products are subject to change or may be discontinued any time without notice.