PROJECT: | DATE:

DISTRIBUTOR: | CATALOGUE #: | TYPE:

DRAWN BY: | CONTRACTOR: | PO:



VTE4-L GEN. 2

LED VAPOR TIGHT

STANPRO

SPEC SHEET

FEATURES AND SPECIFICATIONS

CONSTRUCTION

Housing
- Lightweight, flexible and durable polycarbonate construction makes the luminaire highly impact resistant
- The housing is sealed with a uniform gasket that blocks the ingress of moisture and dust and reinforced stainless steel snap clips lock the luminaire together
- Row mount aligners molded into housing ends
- Sealed strain relief/cable gland kit included

Lens
The frosted LED diffusing pigment lens provides uniform light distribution and has been UV stabilized to ensure that there is no yellowing over time. This impact-resistant polycarbonate lens is impervious to rust or rot and is unaffected by extreme temperatures

Mounting
Stainless steel ceiling mounting hardware and v-hooks also provided for suspension on chain or aviation cable

SPECIFICATIONS

- Easy to clean and service
- LED technology for long term energy savings
- Colour consistency (SDCM) is 3 step MacAdam ellipse


Driver
- 120-347 V
- 0-10 V dimming driver. Dimming cables not included
- 2kV surge protection (standard)

Operating Temperature
-40 °C to +40 °C (-40 °F to 104 °F)

COMPLIANCES

- Suitable for damp & wet locations
- IP65
- IK08
- Meets NEMA 4X
- Meets NSF
- Meets requirements of ICES-005
- UL1598, UL8750
- cULus certified
- DLC Standard
- BC Hydro

TECHNICAL DRAWINGS

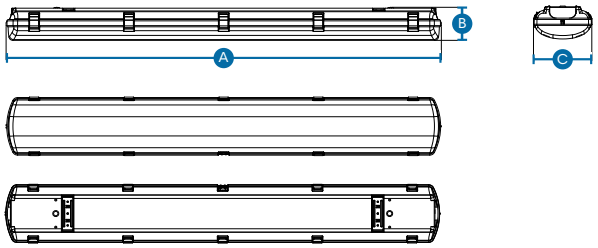

A	B	C
50 3/4" (129 cm)	3 7/8" (9.8 cm)	6 3/4" (17.3 cm)

3 CCT | 5 YEARS WARRANTY | ICES 005 | NEMA 4X | CERTIFIED | NSF | DLC LISTED

Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products. List at www.designlights.org/search.

V: 11-13-2026

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

QUICK SHIP AND TECHNICAL SPECIFICATION TABLE

Type	Order Code	Model Number	Watts (W)	Volts (V AC)	Color Temp. (K)[1]	Lumen Output (lm)[2,3]	Efficacy (lm/W)	CRI	Life L70 (hrs)[4]	Tested Hours LM-80 (hrs)[4]	Dimming	Power Factor	THD (%)
	69594	VTE4-LS3B-Q-3C	40	120-347	3 500/4 000/5 000	5 688	143	80+	135 000	9 000	0-10	>0.90	<20
	69595	VTE4-LS4B-Q-3C	60	120-347	3 500/4 000/5 000	8 441	141	80+	135 000	9 000	0-10	>0.90	<20

[1] Typical color temperature range: +/- 5 %.
[2] Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.
[3] Lumen values are derived from 4 000 K. Please refer to the LUMEN SPECIFICATION TABLE for more details on other color temperatures.
[4] Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

DLC UNIQUE ID TABLE

Order Code	Model Number	DLC Standard Unique ID	
		Direct Linear Ambient	Low / High Bay
69594	VTE4-LS3B-Q-3C	S-PF31XW	S-78SMBD
69595	VTE4-LS4B-Q-3C	S-RJ5MKU	S-XFTL18

LUMEN SPECIFICATION TABLE

Order Code	Model Number	Watts (W)	Volts (V)	3 500 K		4 000 K		5 000 K	
				Lumen Output (lm)	Efficacy (lm/W)	Lumen Output (lm)	Efficacy (lm/W)	Lumen Output (lm)	Efficacy (lm/W)
69594	VTE4-LS3B-Q-3C	40	120-347	5 379	133	5 688	143	5 578	139
69595	VTE4-LS4B-Q-3C	60	120-347	8 069	133	8 441	141	8 281	137

ACCESSORIES*

Order Code	Type	Compatible With
CAS060-KITS-JP[1]	Replacement mounting hardware kit	All configurations
CAS060-LENS-BR-FR	4' replacement frosted polycarbonate lens (1pc)	All configurations
CAS060-MC-JP[2]	Polycarbonate latch (1pc)	All configurations
68834[2]	Stainless steel latch (1pc)	All configurations

* Order separately.
[1] Mounting hardware replacement kit includes: V-hooks (2), stainless steel surface mount brackets for ceiling mount (2), PC latches (2), watertight end cap (1), nickel plated M4 screws 1.5 x 2.5mm (4), nickel plated M4 washers (4), drywall plugs (4), wire nuts (3).
[2] 10 latches are required per fixture.

COMPATIBLE DIMMERS[1]

Brand	Model
LUTRON	DVSTV-HX DIVA 8 AMP 3-WAY/SINGLE -POLE 0-10V DIMMER
EATON	CONTROLS DF10P-CI DECORATOR 0-10V DIMMER
COOPER	SF10P-W
LUXDRIVE	DIMMING CONTROL - 0-10V LOW VOLTAGE WALL MOUNT CONTROL
LUTRON	DVTV-WH DIVA 30mA SINGLE POLE 0-10V FLUORESCENT DIMMER
LEVITON	DS710-10Z

Dimming range : 10 %-100 %

[1] This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.

V: 11-13-2026

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.