

PROJECT:

DISTRIBUTOR:

DRAWN BY:

CATALOGUE #:

CONTRACTOR:

DATE:

TYPE:

PO:



STANPRO

SPEC SHEET

5 CCT SELECTABLE

FEATURES AND SPECIFICATIONS

CONSTRUCTION

Physical Characteristics

- White and black aluminum trim finishes
- Available in 4" and 6" round
- 360° rotation module and 90° tilt
- 45° beam angle
- Frosted lens
- CCT selectable switch is placed on the LED driver
- FT4 cable rating


Mounting

- LED module with LED driver easily installs with included quick connect wire
- Torsion spring mounting clips

PERFORMANCE DATA

- Available in 2 700/3 000/3 500/4 000/5 000 K selectable color temperature
- 90+ CRI
- Estimated life of over 50 000 hours to L70
- Phase cut (ELV / Triac) dimming standard
- Operating temperature: -30 °C to 40 °C (-22 °F to 104 °F)

TECHNICAL DRAWINGS

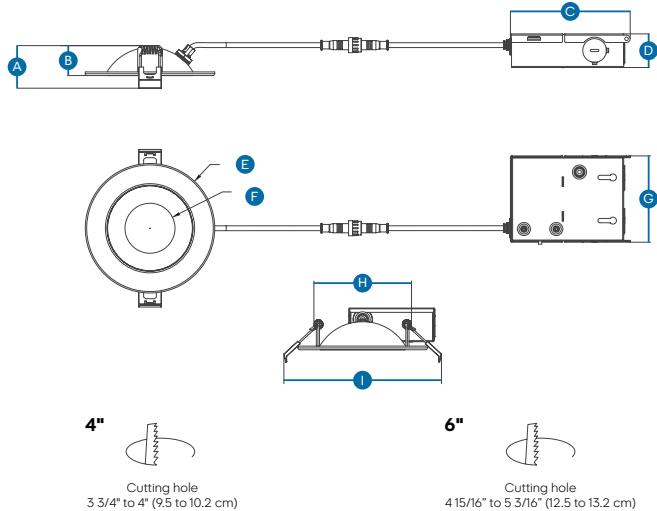

Size	A	B	C	D	E	F	G	H	I	Net weight (lbs)
4"	1 1/2" (3.9 cm)	1 1/8" (2.7 cm)	4 3/8" (11 cm)	1 1/4" (3.1 cm)	Ø 4 3/4" (12 cm)	Ø 17/8" (4.6 cm)	3 1/8" (8 cm)	3 1/2" (9 cm)	5 3/4" (14.6 cm)	0.94
6"	2" (5 cm)	1 1/2" (3.9 cm)	4 3/8" (11 cm)	1 1/4" (3.1 cm)	Ø 6 1/8" (15.6 cm)	Ø 2 5/8" (6.8 cm)	3 1/8" (8 cm)	5" (12.6 cm)	7 1/8" (18 cm)	1.26

* Please refer to the product web page to view detailed drawings by size.

COMPLIANCES

- cETLus for wet locations
- Energy Star
- Meets requirements of ICES-005 issue 5 class B for use in residential applications
- IC rated for direct contact with insulation
- Airtight as per ASTM E283 standard



5 CCT



5 YEARS WARRANTY



ICES 005



ETL us
Intertek



ENERGY STAR

QUICK SHIP AND TECHNICAL SPECIFICATION TABLE

Type	Order Code	Model Number	Watts (W)	Volts (VAC)	Color Temp. (K) ¹	Lumen Output (lm) ²	Efficacy (lm/W)	CRI	Life L70 (hrs) ³	Beam Angle (°)	Shape	Finish	Cable Rating	PF	THD	Master Case QTY
4"																
	70532	SWDL4R-G2-9A-5CWH/CHOICE	9	120	2 700/3 000/3 500/4 000/5 000	750	83	90+	50 000	45	Round	White	FT4	>0.9	<20	32
	70533	SWDL4R-G2-9A-5CBK/CHOICE	9	120	2 700/3 000/3 500/4 000/5 000	750	83	90+	50 000	45	Round	Black	FT4	>0.9	<20	32
6"																
	70534	SWDL6R-G2-13A-5CWH/CHOICE	13	120	2 700/3 000/3 500/4 000/5 000	1 100	84	90+	50 000	45	Round	White	FT4	>0.9	<20	12

¹Typical color temperature range: +/- 5 %.²Lumen values are derived from Energy Star reported data. Initial lumens range: +/- 10 %.³Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

LUMEN SPECIFICATION TABLE

Order Code	Model Number	Watts (W)	2 700 K		3 000 K		3 500 K		4 000 K		5 000 K		Default Programming
			Lumen Output (lm)	Efficacy (lm/W)									
70532	SWDL4R-G2-9A-5CWH/CHOICE	9	769	85	816	90	869	96	872	96	813	90	2 700 K
70533	SWDL4R-G2-9A-5CBK/CHOICE	9	764	84	817	90	866	96	863	95	822	91	2 700 K
70534	SWDL6R-G2-13A-5CWH/CHOICE	13	1174	90	1172	90	1298	99	1295	99	1226	94	2 700 K

ACCESSORIES*

Order Code	Model Number	Type	Opening Diameter (in)	Master Case QTY	Figure
62771 ¹	ACC/MPLATE/3.75IN/HANG.BARS/STD	Mounting plate with hanger bars	3 3/4	20	A
66050 ¹	ACC/MPLATE/3.75IN/SQR/STD	Square mounting plate	3 3/4	96	B
66057 ¹	ACC/MPLATE/3.75IN/ADJ/STD	Adjustable mounting plate	3 3/4	24	C
68986 ²	GOOF RING-4.25IN	Goof ring	4 1/4	120	D
64264	LPDL/ACC/6FT/EXTCABLE/STD	6' Extension cord	-	96	E

¹Order separately.²Includes brackets and screws.²Please note that the white finish of the goof rings differs from the white finish of the Swivel Choice Series.