

## VT4F3

### VAPOUR TIGHT FLUORESCENT

#### 3 lamps

The Stanpro VT4F3 sealed 4 foot linear fluorescent luminaire is ideal for a variety of industrial, commercial and residential applications. It can be installed inside or outside.

#### FEATURES AND SPECIFICATIONS

##### • Construction

###### Housing

- The housing is sealed with a uniform gasket that blocks the ingress of moisture and dust and reinforced snap clips lock the luminaire together
- Polycarbonate construction makes the luminaire lightweight, flexible and highly impact resistant
- The UV stabilized polycarbonate housing and lens are impervious to rust or rot and are unaffected by extreme temperatures

###### Ballast

Our fixtures come standard with electronic instant start ballasts (not intended for use with occupancy sensors).

###### Reflector

The VT4F3 specular reflector provides superior light distribution for maximum light output.

##### Mounting

The housing is moulded with a recessed conduit knockout at either end along with row mounting, end aligners. A sealed, plastic cable gland and stainless steel mounting hardware are included with each luminaire. The VT4F3 can be surface wall, ceiling mounted or suspended with supplied clips.

##### • Compliances

- Suitable for wet and damp locations
- IP65
- CSA certified
- Flame spread rating FSR85
- Smoke classification SDC430



#### OVERVIEW

Light source	Fluorescent
Watts (W)	32
Lamp type	T8




**ORDERING GUIDE**

<b>VT4F3</b>	<b>T8</b>	<b>032</b>	<b>A</b>
Series	Lamp type	Watts (W)	Volts (V)
VT4F3	T8	032 - 32	A - 120

Configuration not recommended in ambient temperature exceeding 25°C.

**DIMENSIONS**

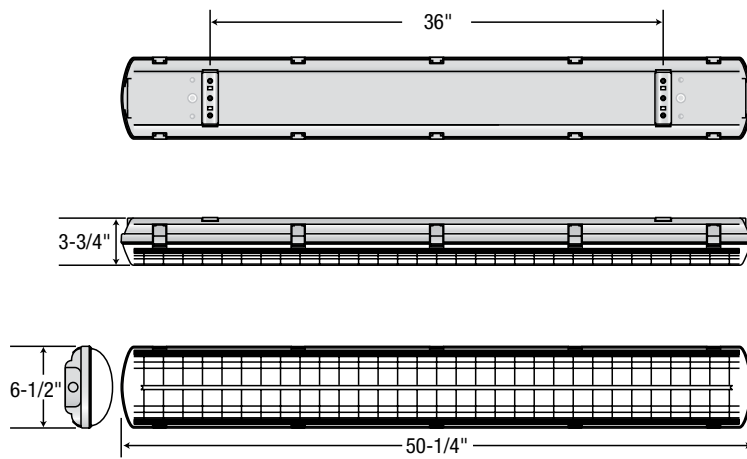

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.