

## Series Spec Sheet

# L2STL LED STRIP

These high quality luminaires are equipped with a frosted lens that diffuses the light comfortably. The L2STL series is a great option for retrofitting your traditional fluorescent linear luminaires to balance performance, aesthetics, and cost.

### FEATURES AND SPECIFICATIONS

#### • Construction

##### Physical Characteristics

- Sleek and compact design ideal for installation in tight spaces
- White powder painted steel
- Frosted PMMA lens

##### Mounting

- Surface, suspended or row mounted (see accessories)
- Canopy plate for octagonal junction box included

#### • Performance Data

- Available in 3 000, 3 500, 4 000 and 5 000 K color temperatures
- 80 CRI
- Electrical ratings: 120 V, 120-277 V and 347 V
- Estimated life of over 100 000 hours to L70
- 0-10 V dimming standard
- Operating temperature (Quick Ship): -20 °C to 50 °C (-4 °F to 122 °F)
- Operating temperature (Configurable): -40 °C (-40 °F)
- Operating temperature with LINK: -40 °C to 25 °C (-40 °F to 77 °F)

#### • Emergency

##### LINK Option - Emergency Power Conversion Module

- With the LINK option, this luminaire can be used as an emergency back up solution when used in conjunction with a Stanpro stand alone battery unit. Please view the [LINK brochure](#) for more details on this technology.
- Patent Pending

#### • Compliances

- cULus listed for damp locations
- Meets requirements of ICES-005 issue 4 class A for use in commercial applications
- CSA Certified to C22.2#141-15 (When used with EL option)



### OVERVIEW

Light source	LED
Watts (W)	22 - 144
Lumen output (lm)	2 530 - 17 981
Efficacy (lm/W)	101.5 - 142
Color temperature (K)	3 000, 3 500, 4 000, 5 000
CRI	80
Weight (lbs)	48": 5.51, 96": 10.36



quick  
ship



LED  
fixture



dimmable



damp  
location



ICES  
005



<sup>1</sup> 5 year warranty for the LINK module.

**QUICK SHIP AND TECHNICAL SPECIFICATION TABLE**

Order code	Watts (W)	Volts V AC	Color temp. (K) <sup>1</sup>	Lumen output (lm) <sup>2</sup>	Efficacy (lm/W)	CRI	Life L70 (hrs) <sup>3</sup>	Tested hours LM-80 (hrs) <sup>3</sup>	Dimming (Yes/No)	Power factor	THD (%)	Case qty (master)
------------	-----------	------------	------------------------------	--------------------------------	-----------------	-----	-----------------------------	---------------------------------------	------------------	--------------	---------	-------------------

<b>96"</b>												
L2STL-96LS2-W/35K	40	120-277	3 500	4 550	114	80	100 000	9 000	Yes	0.90	20	1

<sup>1</sup> Typical color temperature range: +/- 5 %.

<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

<sup>3</sup> Life hours are derived from IESNA LM-80-08 testing report and projected per IESNA TM-21-11 extrapolations.

**ORDERING GUIDE**

Series	Size	Lamp type	Lumen package delivered <sup>1</sup>	Volts (V)	Color temperature (K)	Options
L2STL	48 - 48"	L - LED	S2A - 2 530 lumens (22 W)	A - 120 H - 347 W - 120-277	30K - 3 000 35K - 3 500 40K - 4 000 50K - 5 000	DIM2 - Line voltage dimming, driver 120 V <sup>2</sup> DALI1 - Digital addressable lighting interface driver <sup>3</sup> OS - Occupancy sensor <sup>4</sup> EL - LINK <sup>5</sup> L6 - 6' white power cord (3-wire) L10 - 10' white power cord (3-wire) L12 - 12' white power cord (3-wire)
	S3A - 3 710 lumens (35 W)					
	96 - 96"		S4A - 4 206 lumens (30 W)			
			S5A - 6 043 lumens (45 W)			
			S6A - 8 990 lumens (72 W)			
			S2A - 5 100 lumens (44 W)			
			S3A - 7 400 lumens (73 W)			
			S4A - 8 413 lumens (60 W)			
			S5A - 12 086 lumens (88 W)			
			S6A - 17 981 lumens (144 W)			

<sup>1</sup> See IES files for details.

<sup>2</sup> Not available for S6A.

<sup>3</sup> Not available for 48" S2A and 347 V.

<sup>4</sup> To see available options, please consult the occupancy sensors section.

<sup>5</sup> Emergency power conversion module. LINK is compatible with the following configurations only: L2STL-48LS2A, L2STL-48LS3A and L2STL-48LS4A.

**LINK TECHNICAL SPECIFICATION TABLE**

Size	Lumen package	LINK Watts (W)	3 000 K	3 500 K	4 000 K	5 000 K
			LINK Lumen output (lm)	LINK Lumen output (lm)	LINK Lumen output (lm)	LINK Lumen output (lm)
48"	S2A	11	783	783	783	783
	S3A	11	746	746	746	746
	S4A	11	848	848	848	848

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.

**TECHNICAL SPECIFICATION TABLE**

Size	Lumen package	Watts (W)	Volts (V)	3 000 K		3 500 K		4 000 K		5 000 K		CRI	Life L70 (h)	LM-80 Tested Hours (h)	Power factor	THD (%)	
				Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)						
48"	S2A	22	120	2 530	114	2 530	115	2 530	115	2 530	115	80	172 000	10 000	0.99	9.91	
			120-277	2 530	114	2 530	115	2 530	115	2 530	115	80	172 000	10 000	0.99	9.91	
			347	2 530	110	2 530	110	2 530	110	2 530	110	80	172 000	10 000	0.96	13.47	
	S3A	35	120	3 710	108	3 710	108	3 710	108	3 710	108	80	172 000	10 000	1.00	7.57	
			120-277	3 710	108	3 710	108	3 710	108	3 710	108	80	172 000	10 000	1.00	7.57	
			347	3 710	107	3 710	107	3 710	107	3 710	107	80	172 000	10 000	0.98	11.40	
	S4A	30	120	4 190	142	4 190	142	4 190	142	4 190	142	80	172 000	10 000	0.99	5.40	
			120-277	4 190	142	4 190	142	4 190	142	4 190	142	80	172 000	10 000	0.99	5.40	
			347	4 190	135	4 190	135	4 190	135	4 190	135	80	172 000	10 000	0.96	12.47	
	S5A	45	120	6 019	137	6 019	137	6 019	137	6 019	137	80	172 000	10 000	1.00	4.82	
			120-277	6 019	137	6 019	137	6 019	137	6 019	137	80	172 000	10 000	1.00	4.82	
			347	6 019	137	6 019	137	6 019	137	6 019	137	80	172 000	10 000	0.97	10.40	
	S6A	72	120	8 954	124	8 954	124	8 954	124	8 954	124	80	172 000	10 000	1.00	5.56	
			120-277	8 954	124	8 954	124	8 954	124	8 954	124	80	172 000	10 000	1.00	5.56	
			347	8 900	124	8 900	124	8 900	124	8 900	124	80	172 000	10 000	0.98	9.65	
	96"	S2A	44	120	5 117	116	5 117	116	5 117	116	5 117	116	80	172 000	10 000	1.00	5.73
				120-277	5 117	116	5 117	116	5 117	116	5 117	116	80	172 000	10 000	1.00	5.73
				347	5 117	116	5 117	116	5 117	116	5 117	116	80	172 000	10 000	0.98	8.99
S3A		73	120	7 440	101.5	7 440	101.5	7 440	101.5	7 440	101.5	80	172 000	10 000	1.00	5.73	
			120-277	7 440	101.5	7 440	101.5	7 440	101.5	7 440	101.5	80	172 000	10 000	1.00	5.73	
			347	7 440	101.5	7 440	101.5	7 440	101.5	7 440	101.5	80	172 000	10 000	0.98	8.99	
S4A		60	120	8 380	142	8 380	142	8 380	142	8 380	142	80	172 000	10 000	0.99	5.4	
			120-277	8 380	142	8 380	142	8 380	142	8 380	142	80	172 000	10 000	0.99	5.4	
			347	8 380	135	8 380	135	8 380	135	8 380	135	80	172 000	10 000	0.96	12.47	
S5A		88	120	12 038	138	12 038	138	12 038	138	12 038	138	80	172 000	10 000	1.00	4.82	
			120-277	12 038	138	12 038	138	12 038	138	12 038	138	80	172 000	10 000	1.00	4.82	
			347	12 038	137	12 038	137	12 038	137	12 038	137	80	172 000	10 000	0.97	10.4	
S6A		144	120	17 908	124	17 908	124	17 908	124	17 908	124	80	172 000	10 000	1.00	5.56	
			120-277	17 908	124	17 908	124	17 908	124	17 908	124	80	172 000	10 000	1.00	5.56	
			347	17 800	125	17 800	125	17 800	125	17 800	125	80	172 000	10 000	0.98	9.65	

**ACCESSORIES (order separately)**

Order code	Type
WGD055-48-SL	Wireguard kit 48" <sup>1</sup>
67340	Continuous row mounting connector
69328	V-Hooks (set of 2)
68676	Suspension kit - 2 chains (1 metre) <sup>2</sup>
LEN261-4	Replacement lens 48" <sup>1</sup>

<sup>1</sup> For 96" luminaires, order 2 units.

<sup>2</sup> Must be used in conjunction with 69328.

**COMPATIBLE DIMMERS <sup>1</sup>**

Brand	Model
Leviton	ILLUMATECH IP710-LFZ
Lutron	DIVADVSTV
Lutron	Maestro MS-Z101
Lutron	Nova T NTSTV
Philips	Sunrise SR1200ZTUNV

<sup>1</sup> This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.

**OCCUPANCY SENSORS**

**ON-OFF SENSORS**

Detection - On at (Detection Area) % during (Hold Time) min. Off

Part number	Position	Volts (V)	Technology	Height (ft)	Detection Area (%)	Hold time (min)	Daylight min level (lux)	Remote <sup>1</sup>
OSE-PO-0301	External	120-347	PIR	20-40	100	20	N/A	
OSE-PO-0501	External	120-347	PIR	15-40	100	15	3 000	OSI-FSIR-100
OSE-PO-0502	External	120-347	PIR	15-40	100	15	3 000	
OSI-FO-0301	Internal	120-277	High Frequency	32 max	100	20	Disable	
OSI-FO-0601	Internal	120-347	High Frequency	25 max	100	30	Disable	68681

**BI-LEVEL SENSORS**

Detection - On at (Detection Area) % during (Hold Time) min., then (Stand-by Dim level) %

Part number	Position	Volts (V)	Technology	Height (ft)	Detection Area (%)	Hold time (min)	Stand-by Dim level (%)	Daylight min level (lux)	Remote <sup>1</sup>
OSI-FB-0301	Internal	120-277	High Frequency	32 max	100	20	30	Disable	
OSI-FB-0302	Internal	120-277	High Frequency	32 max	100	20	10	Disable	
OSI-FB-0303	Internal	120-277	High Frequency	32 max	100	20	50	Disable	
OSI-FB-0601	Internal	120-347	High Frequency	25 max	100	30	30	Disable	68681
OSI-FB-0602	Internal	120-347	High Frequency	25 max	100	30	10	Disable	68681
OSI-FB-0603	Internal	120-347	High Frequency	25 max	100	15	40	Disable	68681
OSI-FB-0604	Internal	120-347	High Frequency	25 max	100	30	40	Disable	68681

**TRI-LEVEL SENSORS**


Detection - On at (Detection Area) % during (Hold Time) min., then (Stand-by Dim level) % during (Stand-by period) min. Off

Part number	Position	Volts (V)	Technology	Height (ft)	Detection Area (%)	Hold time (min)	Stand-by Dim level (%)	Stand-by period (min)	Daylight min level (lux)	Remote <sup>1</sup>
OSI-FT-0301	Internal	120-277	High Frequency	32 max	100	20	30	10	Disable	
OSI-FT-0601	Internal	120-347	High Frequency	25 max	100	30	30	10	Disable	68681


<sup>1</sup> To be ordered separately.

**DIMENSIONS**

48"

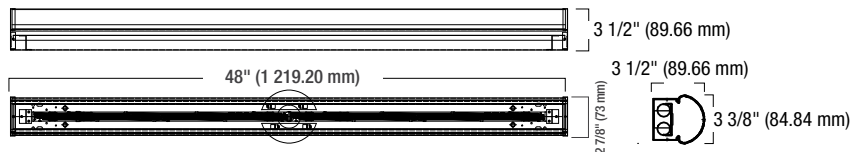

96"

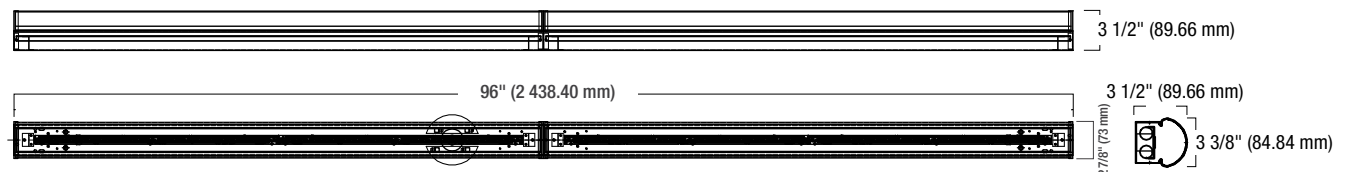


Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.

**PHOTOMETRIC DATA<sup>1</sup>**

**L2STL-48LS2A-X/40K • 2 433.7 lm**


**Polar candela distribution**

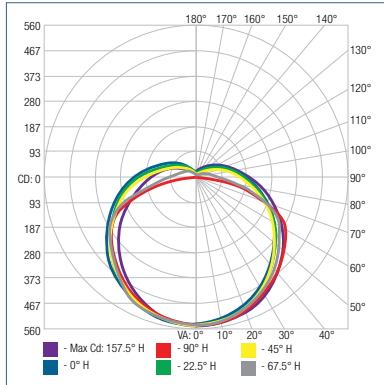

**Zonal lumen summary**


Zone	Lumens	% Fixture
0-30	437.6	17.3
0-40	731.9	28.9
0-60	1 400.3	55.3
60-90	756.5	29.9
70-100	569.2	22.5
90-120	285.3	11.3
0-90	2 156.7	85.2
90-180	374.3	14.8
0-180	2 531.0	100

**Illuminance at a distance**

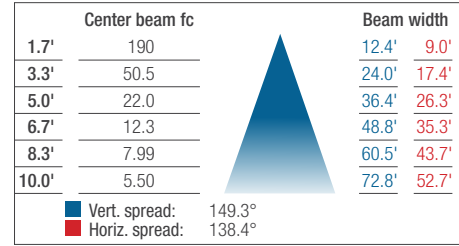

**L2STL-48LS3A-X/40K • 3 725.8 lm**


**Polar candela distribution**

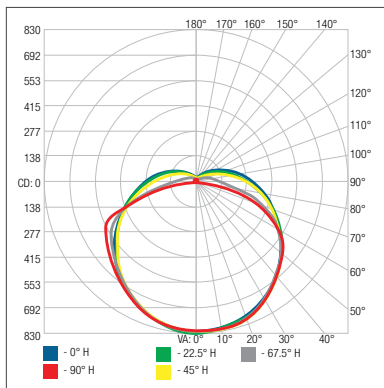

**Zonal lumen summary**


Zone	Lumens	% Fixture
0-30	652.0	17.5
0-40	1 089.9	29.3
0-60	2 076.9	55.7
60-90	1 107.0	29.7
70-100	827.6	22.2
90-120	409.9	11
0-90	3 183.9	85.5
90-180	541.9	14.5
0-180	3 725.8	100

**Illuminance at a distance**

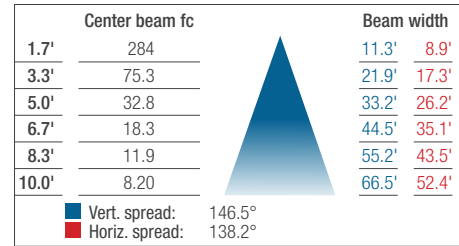

**L2STL-48LS4A-X/40K • 4 206.4 lm**


**Polar candela distribution**

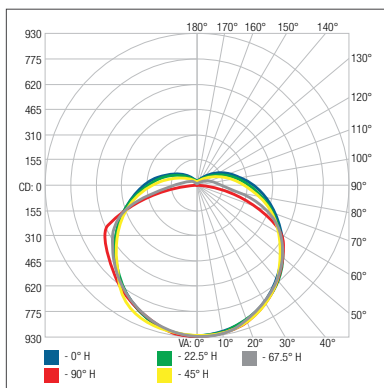

**Zonal lumen summary**

Zone	Lumens	% Fixture
0-30	736.1	17.5
0-40	1 230.4	29.3
0-60	2 344.8	55.7
60-90	1 249.8	29.7
70-100	934.3	22.2
90-120	462.8	11
0-90	3 594.6	85.5
90-180	611.8	14.5
0-180	4 206.4	100

**Illuminance at a distance**

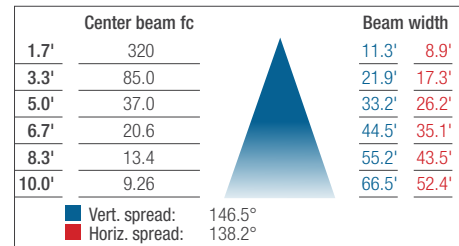


<sup>1</sup> Complete IES files available on our website.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.

**PHOTOMETRIC DATA<sup>1</sup>**

**L2STL-48LS5A-X/40K • 6 043.2 lm**


**Polar candela distribution**

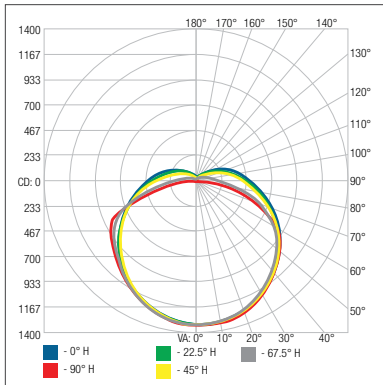

**Zonal lumen summary**


Zone	Lumens	% Fixture
0-30	1 057.5	17.5
0-40	1 767.7	29.3
0-60	3 368.7	55.7
60-90	1 795.5	29.7
70-100	1 342.3	22.2
90-120	664.9	11
0-90	5 164.2	85.5
90-180	879	14.5
0-180	6 043.2	100

**Illuminance at a distance**

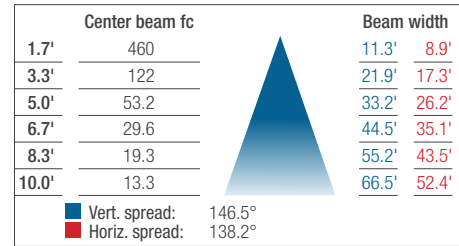

**L2STL-48LS6A-X/40K • 8 990.3 lm**


**Polar candela distribution**

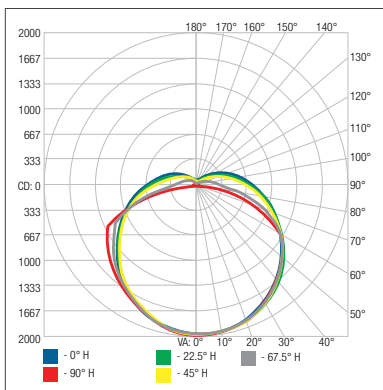

**Zonal lumen summary**

Zone	Lumens	Fixture
0-30	1 573.2	17.5
0-40	2 629.8	29.3
0-60	5 011.5	55.7
60-90	2 671.1	29.7
70-100	1 996.9	22.2
90-120	989.2	11
0-90	7 682.7	85.5
90-180	1 307.6	14.5
0-180	8 990.3	100

**Illuminance at a distance**

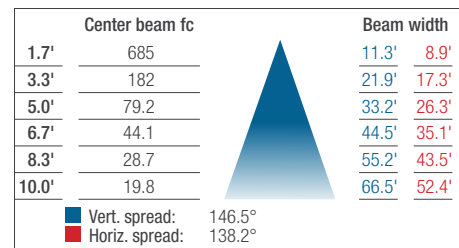

<sup>1</sup> Complete IES files available on our website.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.