

## Series Spec Sheet

# M

## DECORATIVE REMOTE

MR16 Surface Mount  
Single, Double or Triple  
6 V, 12V , & 24 V Lamps

The M series of commercial MR16 remotes provides exceptional light output in a compact, traditional design. The die cast, all metal housing is fully adjustable with a friction lock tilt and swivel that can be locked in place with a rear mounted set screw. The canopy is designed to mount directly to typical electrical junction boxes. Available in 6 V, 12 V and 24 V models, all utilizing low glare, MR16 quartz halogen or LED lamps.

### FEATURES AND SPECIFICATIONS

#### • Mechanical

- Die cast, solid metal housing with die cast, twist lock lamp collar
- Complete adjustability - both tilt and swivel
- 5" diameter canopy standard
- Two canopy mounting holes designed to match standard electrical junction boxes
- White paint finish is standard, black color is optional
- MR16 lamp designed with low glare reflector and available in 6 VDC, 12 VDC or 24 VDC

#### • Compliances

- CSA Certified to C22.2 #141-15
- Meets requirements of ICES-005



### OVERVIEW

Light source	LED, Incandescent
Input Voltage (VDC)	6, 12, 24

For complete warranty details, please see our terms and conditions on our website.



ICES  
005



**ORDERING GUIDE - LED**

Series	Nbr of heads	Volts (VDC operational)	Watts (W)	Lamp type	Color	Options
M	1 - Single head	06-24V - 6 to 24	4W - 4	LR - LED	WH - White (standard) BK - Black	LCP - Less Canopy TP - Tamper Proof Screws WG - Wireguard (order separately) PG - Lexan Guard (seperate order)
	2 - Double head		5W - 5	LA - LED		
	3 - Triple head	12-24V - 12 to 24	6W - 6	LA - LED		
	4 - Quad head (require 12" dia. canopy)		7W - 7			

**ORDERING GUIDE - INCANDESCENT**

Series	Nbr of heads	Volts (VDC)	Lamp type	Color	Options
M	1 - Single head	06V - 6	See lamp selection chart below	WH - White (standard)	LCP - Less Canopy TP - Tamper Proof Screws WG - Wireguard (order separately) PG - Lexan Guard (seperate order)
	2 - Double head	12V - 12		BK - Black	
	3 - Triple head	24V - 24			
	4 - Quad head (require 12" dia. canopy)				

**LAMP SELECTION - INCANDESCENT**


MR16 • Small head	6 V	12 V	24 V
Quartz halogen	10WQ	12WQ, 20WQ, 35WQ	12WQ, 20WQ, 50WQ

**WIREGUARD <sup>1</sup>**

	Part number	Dimension (in)
1 head	WGD550	8.5x6x7
2 heads		

<sup>1</sup> Please contact your customer service representative for more information.

**DIMENSIONS**

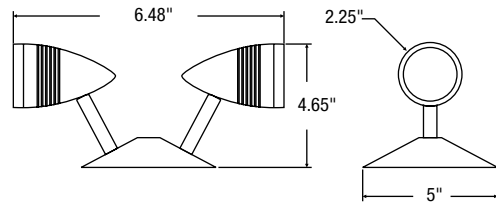

**SPACING GUIDE**

Mounting height	Spacing center to center (ft)			
	4WLR	5WLA	6WLA	7WLA
8 ft	76	81	94	108
10 ft	79	79	93	106
15 ft	66	62	82	96
20 ft	53	49	73	87

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.