

## Series Spec Sheet

# PRMPN-2

## PLASTIC COMBO RUNNING MAN STANDALONE

### LED 120/347 VAC Input

The PRMPN-2 commercial plastic combination running man sign is designed using durable and lightweight high impact thermoplastic. Combination sign with a canopy quick snap for a decorative look or a flush mount for rigid installation.

### FEATURES AND SPECIFICATIONS

#### • Circuitry

- LED ultra bright light source
- 120/347 VAC Input, field selectable
- 120 V/0.46 A 3.93 W; 347 V/0.37 A 3.27 W max power consumption
- Dry or damp location
- Ambient temperature 10°C to 35°C
- 90 minutes emergency power duration standard
- Two 1W LED heads
- Push button test switch
- Diagnostic/pilot LED for AC ON
- Fully automatic, current limited charger
- Solid state design and construction with brownout and short circuit protection
- Temperature compensated
- Maintenance free, Ni-Cad battery

#### • Mechanical

- High impact, UV stabilized, thermoplastic construction
- Quick snap faceplates and universal canopy for rapid and simple installation
- Universal faces
- Universal mounting
- White colour is standard
- Fully adjustable, high impact thermoplastic round LED heads are standard

#### • Compliances

- CSA Certified to C22.2 #141-15, C860
- Meets requirements of ICES-005



quick  
ship



ICES  
005



For complete warranty details, please see our terms and conditions on our website.


**QUICK SHIP AND TECHNICAL SPECIFICATION TABLE**  <sup>1</sup>

Part number	DC Volts (VDC)	Watts (W)	Nbr of faces	Nbr of heads	Head	Lamp (W)	Light source	Input Volts (VAC)	Color
PRMPN-2	N/A	N/A	Universal	2	N/A	1	DEL	120/347	White

<sup>1</sup> **QUICK SHIP:** Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

**ACCESSORIES**

Flush wall mount backplate. Use for direct wall mount (no canopy required)  
Spider knock-out for wall-mount





Universal canopy





**DIMENSIONS**

**FLUSH MOUNT**

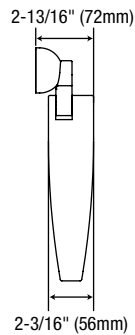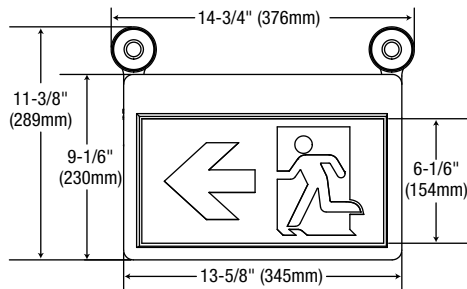

**TAPERED MOUNT**

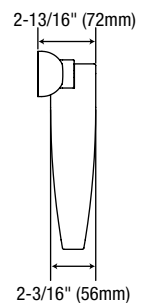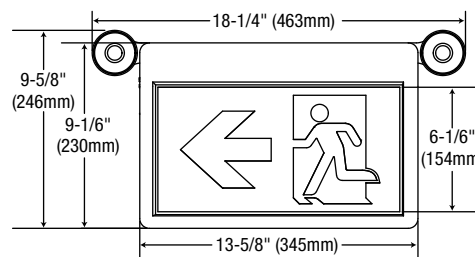

**CONFIGURATION**



Comes standard with three pictogram legends for direction selection.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.