

Series Spec Sheet

SLE-2

PLASTIC DECORATIVE BATTERY UNIT

6 VDC Output 120/347 VAC Input

The SLE-2 series of plastic battery units utilizes a modern design that blends well into current decor styles. The SLE-2 series is a stand-alone battery unit (not capable of remote load connection) configured with 6 VDC output, 30W capacity for 30 minutes duration.

FEATURES AND SPECIFICATIONS

• Electrical and circuitry

- 120/347 VAC 60Hz Input, field selectable
- Solid state variable rate charger
- 6 VDC emergency power output
- 30 W battery capacity
- 30 minutes emergency battery duration standard
- Momentary push button test switch
- Pilot LED for AC ON
- Fully automatic, current limited charger
- Complete battery recharge in 24 hours
- Maintenance free, sealed lead acid battery

• Mechanical

- High impact, UV stabilized, thermoplastic construction
- Low profile, twin lamp configuration
- Universal spider knockout pattern and keyhole

mounting slots stamped into back of cabinet

– Unit “quick snaps” onto backplate for simple, speedy installation

– White color is standard

Note: Not intended for flush ceiling mount.

• Approvals

- CSA Certified to C22.2 #141-15

• Compliance

- Meets requirements of ICES-005



quick
ship



ICES
005



QUICK SHIP AND TECHNICAL SPECIFICATION TABLE  ¹

| Part number | DC Volts (VDC) | Watts (W) | Nbr of heads | Head | Lamp (W) | Light source | Input Volts (VAC) | Color |
|-------------|----------------|-----------|--------------|------|----------|--------------|-------------------|-------|
| SLE-2 | 6 | 30 | 2 | N/A | 7.2 | Tungsten | 120/347 | White |

¹ **QUICK SHIP:** Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.


ORDERING GUIDE

| SLE-2 | 7.2W | WH | |
|--------|-----------------|-----------------------|------------------------|
| Series | Lamp | Color | Options |
| SLE-2 | 7.2W (tungsten) | WH - White (standard) | LC - 120 VAC line cord |

MODEL RATINGS

| Model | Volts (V) | Watt capacities (W) | | | |
|-------|-----------|---------------------|---------|---------|----------|
| | | 30 min. | 60 min. | 90 min. | 120 min. |
| SLE-2 | 6 | 30 | 15 | N/A | N/A |

DIMENSIONS

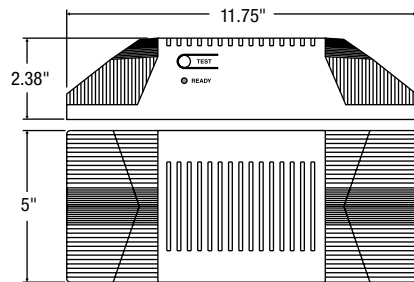

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.