

Series Spec Sheet

SLEXW

RAINSTORM

NEMA4X/EEMAC4X

The SLEXW series of NEMA4X and EEMAC4X rated weatherproof signs is designed to operate in extreme environments. The fully gasketed housing is suitable for outdoor and wash-down locations. Available in AC/DC and internally self-powered versions.

FEATURES AND SPECIFICATIONS

• Circuitry - AC & AC/DC

- LED ultra bright light source
- 120/347 V AC Input, field selectable
- 1.9W power consumption single or double face
- Emergency DC wattages as follows:

UDC					IB	
6 V	12 V	24 V	120 V	347 V	120 V	347 V
1.0 W	1.4 W	3.5 W	1.9 W	1.8 W	3.1 W	2.9 W

• Circuitry - Self-Powered

- LED ultra bright light source
- 120/347 V AC Input, field selectable
- 2W power consumption single or double face
- High-performance, sealed Ni-Cad battery
- 90 minutes emergency duration
- Solid state transfer and battery charger

• Mechanical

- Heavy-duty glass fibre reinforced polyester construction
- Lens with one piece, molded gasket
- Four integral mounting holes (one per corner) protected behind polycarbonate cover
- Lens secured to housing with four oversized captive screws
- The housing is supplied standard in a grey industrial finish. Face plate standard grey.

• Compliances

- CSA Certified to C22.2 #141-15 and C860




ORDERING GUIDE

Series	Nbr of faces	Mounting	Frame Color	Mask color	DC Voltage*
SLEXW	1 - Single face 2 - Double face	CM - Ceiling mount WM - Wall mount EM - End mount PM - Pendant mount	GY - Grey	GY - Grey (standard)	UDC - Universal DC backup voltage 6, 12 or 24 V DC selectable IB - Self-powered for 90 minutes

* If AC only is required, select the UDC option and do not connect the DC wires when installing.

DIMENSIONS

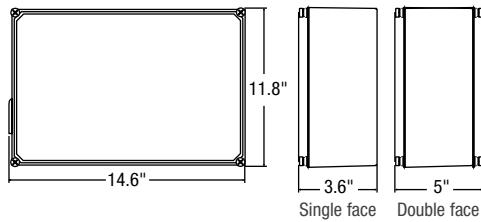

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.