

Series Spec Sheet

SLP-2

STANDALONE PLASTIC BATTERY UNIT

6 VDC Output/120 VAC Input

The SLP-2 series of plastic battery units utilizes a modern design with two fully adjustable, high output head assemblies. It is a stand-alone battery unit (not capable of remote load connection) configured with 6 VDC output, 30 W capacity for 30 minutes duration.

FEATURES AND SPECIFICATIONS

• Electrical and circuitry

- 120/347 VAC 60Hz Input, field selectable
- Solid state variable rate charger
- 6 VDC emergency power output
- 30 W output capacity, small housing
- 30 minutes emergency power duration standard
- Momentary push button test switch
- Pilot LED for AC ON status
- Fully automatic, current limited charger
- Line latched, low voltage protection
- Short circuit protection
- Complete battery recharge in 24 hours
- Maintenance free, sealed lead acid battery
- 347 VAC available in white only

• Mechanical

- High impact, UV stabilized, thermoplastic construction
- Two fully adjustable square lamp heads
- Two 9 W wedge base incandescent lamps
- Universal spider knockout pattern and keyhole mounting slots stamped into back of cabinet
- Unit “quick snaps” onto backplate for simple, speedy installation
- White color is standard

Note: Not intended for flush ceiling mount

• Approvals

- CSA Certified to C22.2 #141-15

• Compliance

- Meets requirements of ICES-005



ICES
005




ORDERING GUIDE

SLP-2 /	
Series	Options
SLP-2	LT - Laser remote test

MODEL RATINGS

Model	Volts (VDC)	Watts capacities (W)	
		30 min.	60 min.
SLP-2	6	30	15

DIMENSIONS

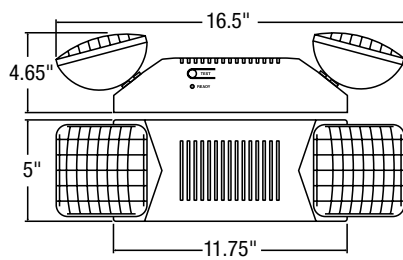

White fixture

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.