

Series spec sheet

SLRXP

HAZARDOUS LOCATION REMOTE FIXTURE

Class I, Division 1, Groups C & D, Zone 1 & 2, Groups IIA & IIB

6, 12 or 24 VDC Models

Wall, Ceiling or Pendant Mount

Designed to meet the strictest Codes, the SLRXP series of hazardous location remote fixtures provides safe and dependable operation. The SLRXP series housings are built with die cast, copper free aluminum, in a variety of Class and Division rated models. Available as 6 V, 12 V or 24 V models with wall, ceiling or pendant mounted configuration.

FEATURES AND SPECIFICATIONS

• Circuitry - AC & AC/DC

- Single or double internal MR16 lamp assemblies
- Quartz-halogen or LED lamps

• Mechanical

- Die cast, copper free aluminum, grey finish
- Heavy-duty Pyrex glass lens
- Internal MR16 lamp assembly is fully adjustable
- Wall, ceiling or pendant mounting (as specified)
- Wiring pre-pulled through fixture
- Wall and ceiling models c/w integrated die cast junction box
- Junction box c/w oversized integral mounting holes and tapped and plugged rigid holes
- Temperature code: T6

• Approvals

- CSA Certified to C22.2 #137
- CSA Certified to C22.2 #141-15
- Class I, Division 1, Groups C & D
- Class I, Zone 1 & 2, Groups IIA & IIB

• Compliance

- Meets requirements of ICES-005



OVERVIEW

Light source	Quartz, LED
DC voltage (VDC)	6, 12, 24

For complete warranty details, please see our terms and conditions on our website.



LED
fixture



hazardous
location



ICES
005



ORDERING GUIDE - LED

SLRXP							11CD /	
Series	Head	Nbr of lamps	DC Volts (VDC operational)	Watts (W)	Lamp type	Mounting	Class, Div., Group	Options
SLRXP	1 - Single 2 - Double (with J-Box)	1 - Single lamp per head 2 - Double lamp per head	06-24V - 6 to 24	4W - 4	LR - LED	CM - Ceiling mount PM - Pendant mount WM - Wall mount	Class 1 Division 1 Groupe C & D	LGD - Die cast lens guard
			12-24V - 12 to 54	5W - 5 6W - 6 7W - 7	LA - LED LA - LED			

SPACING GUIDE


Mounting height	Spacing center to center (ft)			
	4WLR	5WLA	6WLA	7WLA
8 ft	76	81	94	108
10 ft	79	79	93	106
15 ft	66	62	82	96
20 ft	53	49	73	87

LUMEN TABLE


Watts	Lumens
4W LR	388
5W LA	435
6W LA	507
7W LA	652

DIMENSIONS


PENDANT MOUNT



CEILING MOUNT

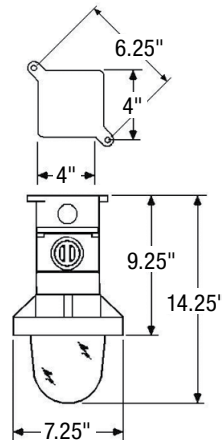

WALL MOUNT

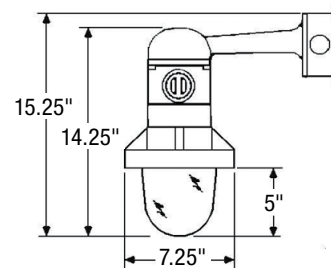

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.