

Series Spec Sheet

SPESS-SPSES

BILINGUAL COMBO SIGN

NRCAN C860 Registered
LED 120/347 VAC Input

The SPESS-SPSES series of commercial combination steel exit and sortie signs and battery units features a slim profile that eliminates light leaks combined with a simple, easy to install design. Two PAR18 small style, front mounted heads are standard or MR16 type are optional.

FEATURES AND SPECIFICATIONS

• Circuitry

- LED ultra bright light source
- 120/347 VAC Input, field selectable
- 3.1 W power consumption for LED portion of combination sign
- LED Emergency DC wattage
6 VDC = 2.2 W 12 VDC = 3.2 W
- Wattage capacity 36 to 72 W
- 30 minutes emergency power duration standard
- Momentary push button test switch
- Diagnostic/pilot LED for AC ON
- Fully automatic, current limited charger
- Solid state design and construction with brownout and short circuit protection
- Temperature compensated
- Maintenance free, sealed lead acid battery

• Mechanical

- 20 Gauge steel construction
- Slide out faceplates and backplates for rapid and simple installation
- Snap out directional chevrons/arrows
- Universal spider knockout pattern stamped into backplate for junction box mounting
- Universal models include ceiling mount, field installable canopy kits c/w spider plate
- Multiple conduit entry knockouts
- White powder coat finish standard, other finishes and colours optional
- Front head mounting is standard, exit side mount is optional

• Compliances

- CSA Certified to C22.2 #141.15, C860



Energy Verified
Énergie Vérifiée

ORDERING GUIDE

Series	Voltage (V)	Wattage	Nbr of faces	Head		Lamp	Options ¹
SPES - (Exit-Sortie) SPSES - (Sortie-Exit) C860 Certified	6 - 6 1 - 12	See rating chart below	1 - Single face 2 - Double face	00 - No heads 1N - 1 PAR18 (std) 2N - 2 PAR18 (std) 1S - 1 MR16 2S - 2 MR16	1M - 1 MR16 2M - 2 MR16	See lamp selection chart below	AT, TD ² , TP, WG ³ , PG, OP, K5

¹For detailed options descriptions, please consult the options page.

² Specify AC voltage.


³ Specify mounting.

LAMP SELECTION


	6 Volts	12 Volts
PAR18 - Small head		
LED	3LJ, 4LJ, 5LA	3LJ, 4LJ, 5LA, 6LA, 7LA
Quartz halogen	12Q	10Q, 12Q
Tungsten	09T	09T, 12T, 18T
MR16 - Small head c/w MR16 Lamp		
LED	4LR, 5LA	4LR, 5LA, 6LA, 7LA
Quartz halogen	10Q, 12Q	12Q, 20Q

MODEL RATINGS

Model	Voltage	Wattage capacities		
		30 min.	60 min.	90 min.
SPES-SPSES0636	6V	36	18	12
SPES-SPSES0650	6V	50	25	16
SPES-SPSES1236	12V	36	18	12
SPES-SPSES1250	12V	50	25	16
SPES-SPSES1272	12V	72	36	24

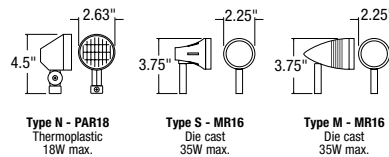

DIMENSIONS

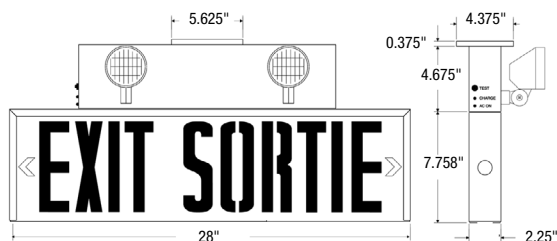

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.