

Series Spec Sheet

SPEXX/SPSRX

EXTRUDED ALUMINUM COMBO

NRCAN C860 Registered

LED 120/347 VAC Input

The SPEXX/SPSRX series of commercial combination extruded signs and battery units features a fully modern appearance. The extruded aluminum design provides for a rigid, durable and lightweight sign. Two PAR18 small style, front mounted heads are standard, MR16 type are optional.

FEATURES AND SPECIFICATIONS

• CIRCUITRY

- LED ultra bright light source
- 120/347 VAC Input, field selectable
- 1.9 W power consumption for LED exit portion of combination sign
- LED Emergency DC wattages as follows:
EXIT: 6 VDC = 1 W 12 VDC = 1.4 W
SORTIE: 6 VDC = 1.3 W 12 VDC = 1.4 W
- 6 VDC or 12 VDC emergency power output versions (as specified)
- Wattage capacities from 36 to 72 W
- 30 minutes emergency power duration standard
- Momentary push button test switch
- Diagnostic/pilot LEDs for AC ON and CHARGE
- Fully automatic, current limited charger
- Line latched, low voltage protection
- Solid state design and construction with brownout and short circuit protection
- Temperature compensated
- Maintenance free, sealed lead acid battery

• Mechanical

- Extruded aluminum construction exit sign
- Slide in/out captive faceplate(s) and backplate for rapid and simplified installation
- Snap out directional chevrons/arrows
- Universal spider knockout pattern stamped into backplate for junction box mounting
- Universal models include ceiling or end mount, field installable canopy kit c/w spider plate
- Multiple conduit entry knockouts
- White powder coat finish standard
- Front head mounting is standard, exit side mount is optional

• Certification

- CSA Certified to C22.2 #141-15, C860



ORDERING GUIDE

Series	Voltage (V)	Wattage	Nbr of faces	Head	Lamp
SPEXX - (Exit) SPSRX - (Sortie) C860 certified	6 - 6 1 - 12	See rating chart below	1 - Single face 2 - Double face	00 - No heads 1N - 1 PAR18 (std) 2N - 2 PAR18 (std) 1S - 1 MR16 2S - 2 MR16 1M - 1 MR16 2M - 2 MR16	See lamp selection chart below

LAMP SELECTION

	6 V	12 V
PAR18 • Small head		
LED	3LJ, 4LJ, 5LJ	3LJ, 4LJ, 5LJ, 6LA, 7LA
Quartz halogen		10Q
Tungsten	09T	
MR16 • Small head c/w MR16 Lamp		
LED	4LR, 5LA	4LR, 5LA, 6LA, 7LA
Quartz halogen	10Q, 12Q, 20Q	20Q


LUMEN TABLE

Watts	Lumens
3W LJ	313
4W LJ	388
5W LJ	590
4W LR	388
5W LA	435
6W LA	507
7W LA	652

MODEL RATINGS

Model	Volts (V)	Wattage capacities (W)		
		30 min.	60 min.	90 min.
SPEXX6036	6	36	18	12
SPEXX6050	6	50	25	16
SPEXX1036	12	36	18	12
SPEXX1050	12	50	25	16
SPEXX1072	12	72	36	24
SPSRX6036	6	36	18	12
SPSRX6050	6	50	25	16
SPSRX1036	12	36	18	12
SPSRX1050	12	50	25	16
SPSRX1072	12	72	36	24

DIMENSIONS

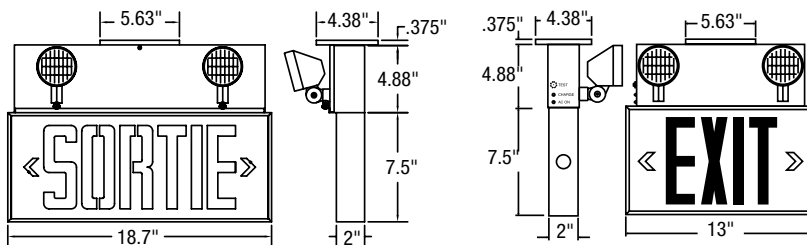

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.