


# PYXIE | Light Up Your Imagination

1

## CHOOSE THE MOUNTING KIT



**SURFACE**  
69872 / 69873




**RECESSED**  
69878 / 69879



**SUSPENDED**  
69876 / 69877



**MONOPOINT**  
69874 / 69875



**TRACK (J type)**  
69880 / 69881



**TRACK SUSPENDED (J type)**  
69882 / 69883



2

## CHOOSE THE COMPATIBLE CYLINDER

**CYLINDER MODULE**  
69866 / 69867



Light source	LED
Watts (W)	15
Lumen output (lm)	942 - 1 213
Efficacy (lm/W)	63 - 81
Color temperature (K)	2 700/3 000/3 500/4 000/5 000
CRI	90+




3

## CHOOSE OPTIONAL DECORATIVE SNOOT

**STRAIGHT SNOOT**  
69884 / 69885



**WALL WASH SNOOT**  
69886 / 69887

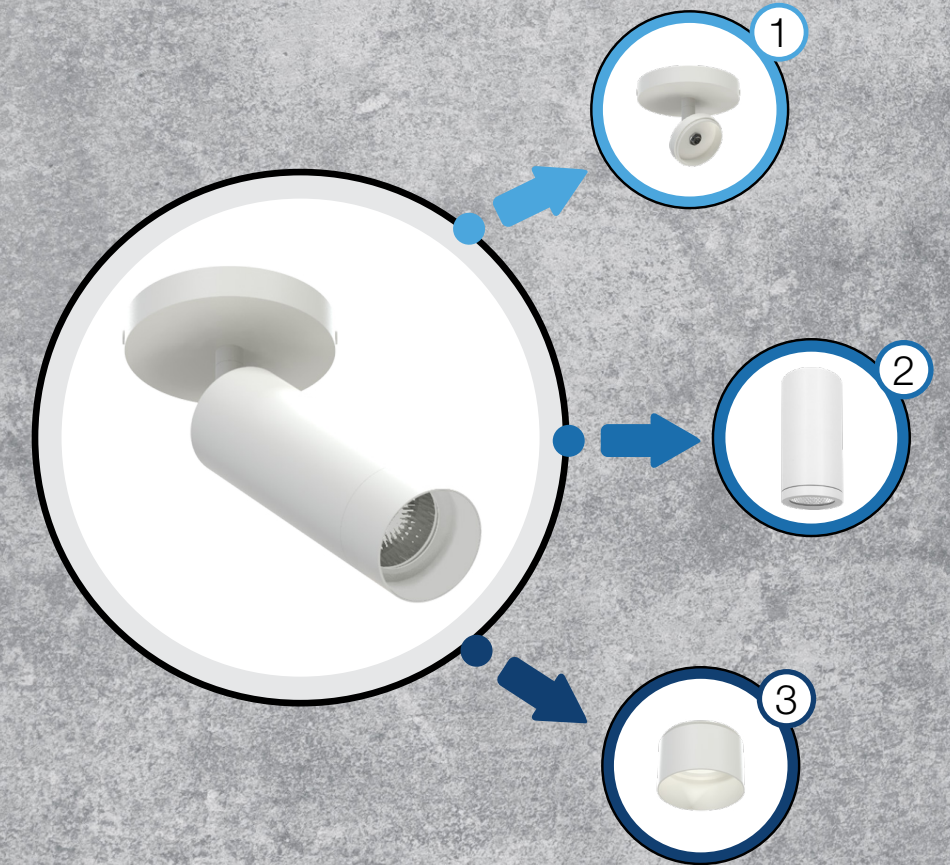

**Cylinder Module**  
Scan for more details



**Wall Mount**  
Scan for more details



## LOOKING FOR A WALL MOUNT VERSION?

DISCOVER PYXIE WALL MOUNT, AVAILABLE IN DOWNLIGHT AND UPLIGHT/DOWNLIGHT.

Light source	LED
Watts (W)	15, 30
Lumen output (lm)	985 - 2 290
Efficacy (lm/W)	65 - 76
Color temperature (K)	2 700/3 000/3 500/4 000/5 000
CRI	90+




# PYXIE | Illuminez Votre Imagination

1

## CHOISIR L'ENSEMBLE DE MONTAGE

6<sup>o</sup>  
endroits  
mouillés

**SURFACE**  
69872 / 69873



**ENCASTRÉ**  
69878 / 69879




6<sup>o</sup>  
endroits  
humides

**SUSPENDU**  
69876 / 69877



**MONOPOINT**  
69874 / 69875



endroits  
secs

**RAIL (Type J)**  
69880 / 69881



**RAIL SUSPENDU (Type J)**  
69882 / 69883



2

## CHOISIR LE CYLINDRE COMPATIBLE

**MODULE DU CYLINDRE**  
69866 / 69867



Source de lumière	DEL
Watts (W)	15
Flux lumineux (lm)	942 - 1 213
Efficacité (lm/W)	63 - 81
Température de couleur (K)	2 700/3 000/3 500/4 000/5 000
IRC	90+

**5 ans**  
garantie



À gradation




3

## CHOISIR L'EMBOU DÉCORATIF OPTIONNEL

**EMBOU DROIT**  
69884 / 69885



**EMBOU LAVAGE MURAL**  
69886 / 69887

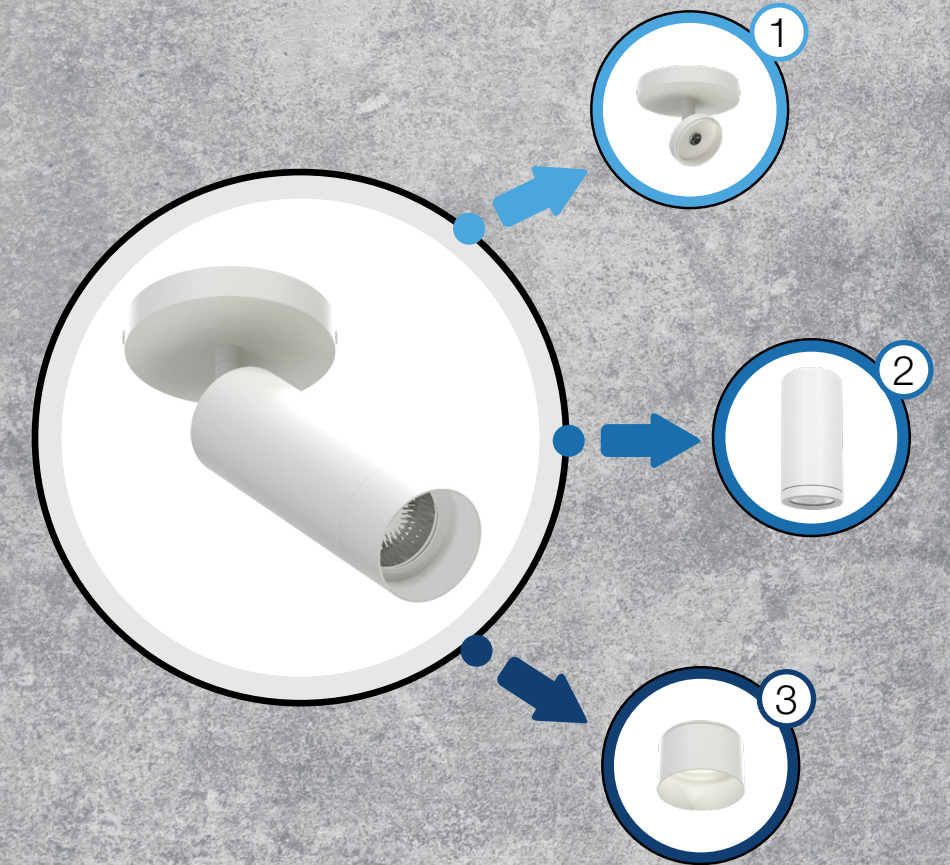

**Module Cylindre**  
Scanner pour plus de détails



**Montage Mural**  
Scanner pour plus de détails



## À LA RECHERCHE D'UNE VERSION MURALE ?

DÉCOUVREZ PYXIE MURAL, DISPONIBLE AVEC LUMIÈRE VERS LE BAS ET VERS LE HAUT/BAS.

Source de lumière	DEL
Watts (W)	15, 30
Flux lumineux (lm)	985 - 2 290
Efficacité (lm/W)	65 - 76
Température de couleur (K)	2 700/3 000/3 500/4 000/5 000
IRC	90+

6<sup>o</sup>  
endroits  
mouillés



69868 / 69869  
Disponible en deux finitions



69870 / 69871  
Disponible en deux finitions

Disponible en deux finitions



**STANPRO**

