A modern office interior with large windows overlooking a city skyline. The office features white desks, black ergonomic chairs, and several computer monitors. The lighting is bright and even, highlighting the clean, professional environment.

# LINK NORMALLY ON EMERGENCY REMOTE

- Save money
- Save labor
- Better lighting uniformity
- Many fixtures to choose from

**STANPRO**



# INTRODUCING THE LATEST INNOVATIVE EMERGENCY LIGHTING SOLUTION LINK

The LINK is a patent pending device that when factory installed in a Stanpro normally ON fixture and connected to a Stanpro 12 or 24 V battery unit converts the luminaire into an emergency lighting normally ON remote fixture.


When choosing the LINK option you can blend your general lighting design and incorporate your emergency lighting into one clean architectural space.

The LINK option is not limited to blending general lighting and emergency lighting; you can choose this option to render your luminaire as a primary emergency lighting solution, eliminating the need for obtrusive remote emergency lighting heads.


The LINK is simply an architect or interior designers dream come true.

**We made your emergency lighting disappear!**

## NORMAL MODE

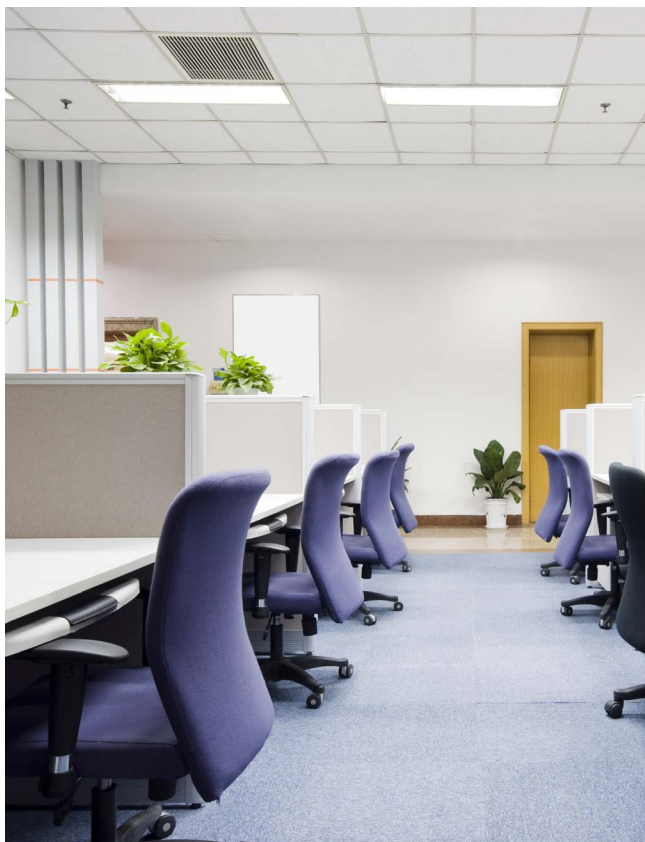

## EMERGENCY MODE

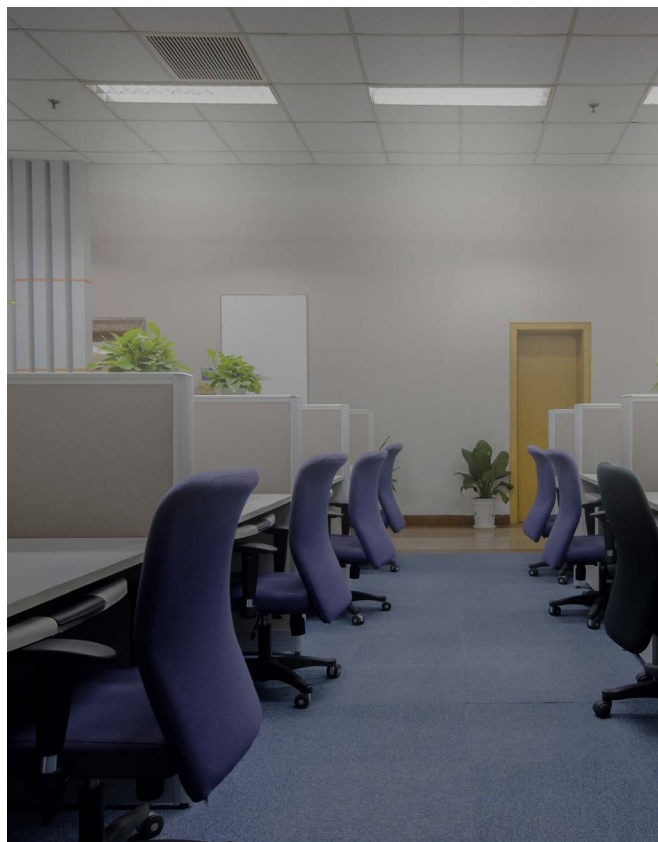

# TECHNICAL SPECIFICATIONS


## • Optional Emergency Lighting

Normally ON Emergency Remote Luminaire LINK


- This unit can be used with an emergency backup powered by either a 12 V or 24 V DC Stanpro battery unit, complete with or without auto test
- Consuming 11 W, 12 - 24 VDC
- Patent pending

## • Emergency Lighting Compliances


- CSA certified as a C22.2 C141-15
- Meets ICES-005 requirements

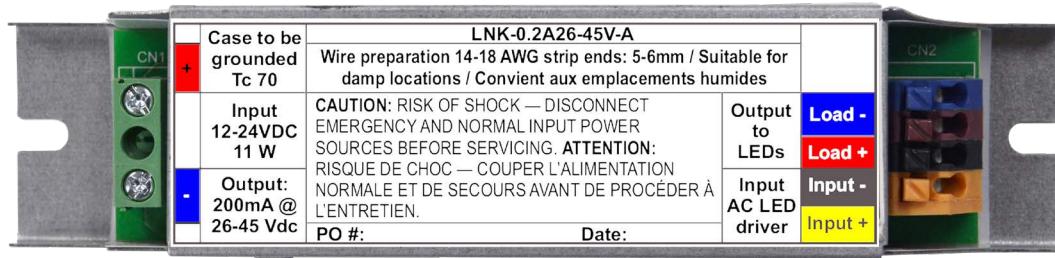



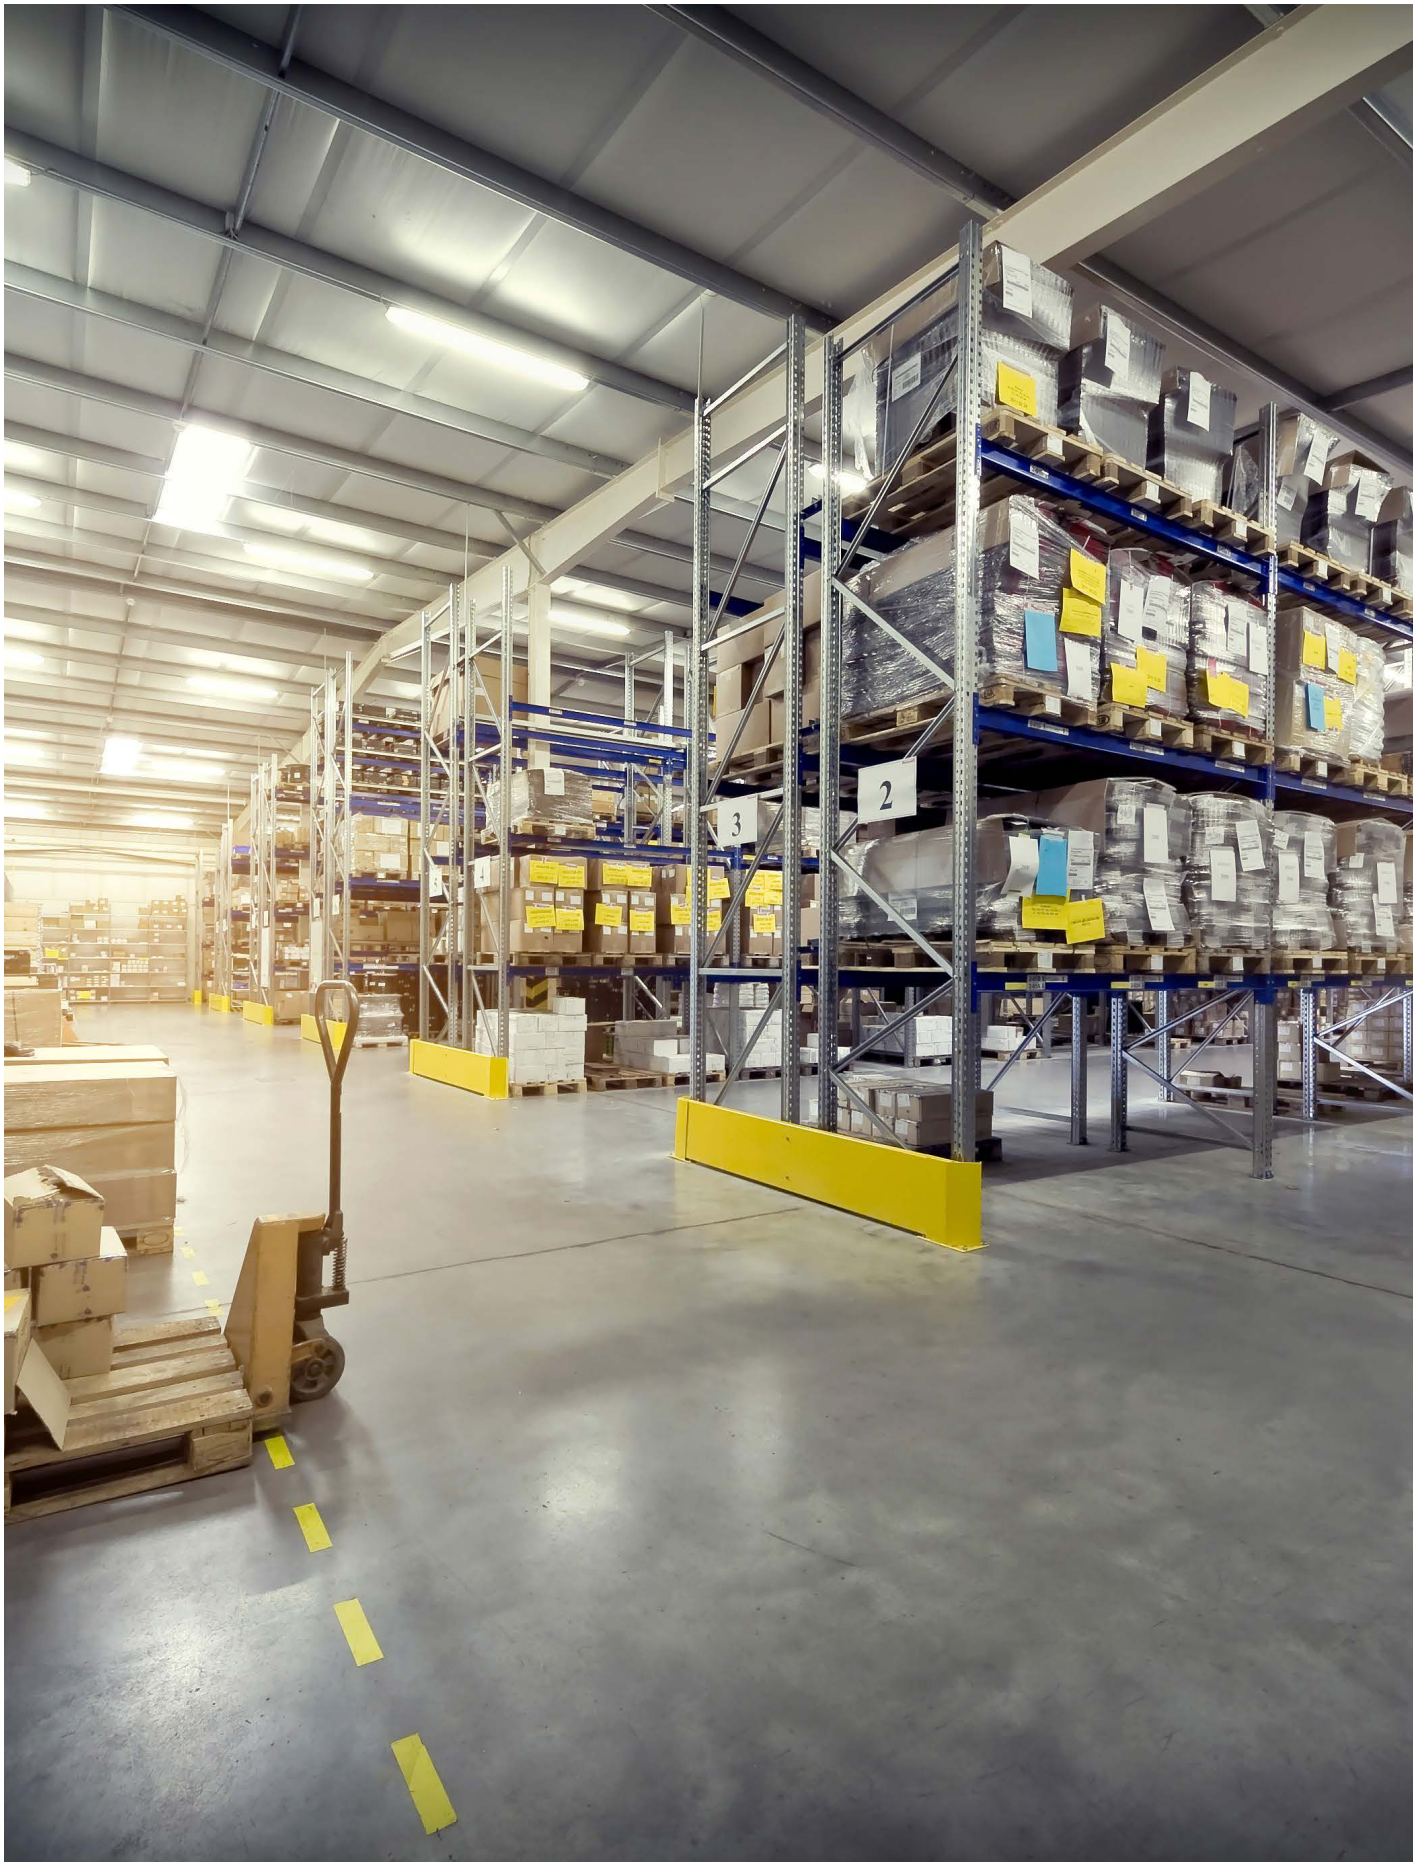

# LINK WIRING DIAGRAM

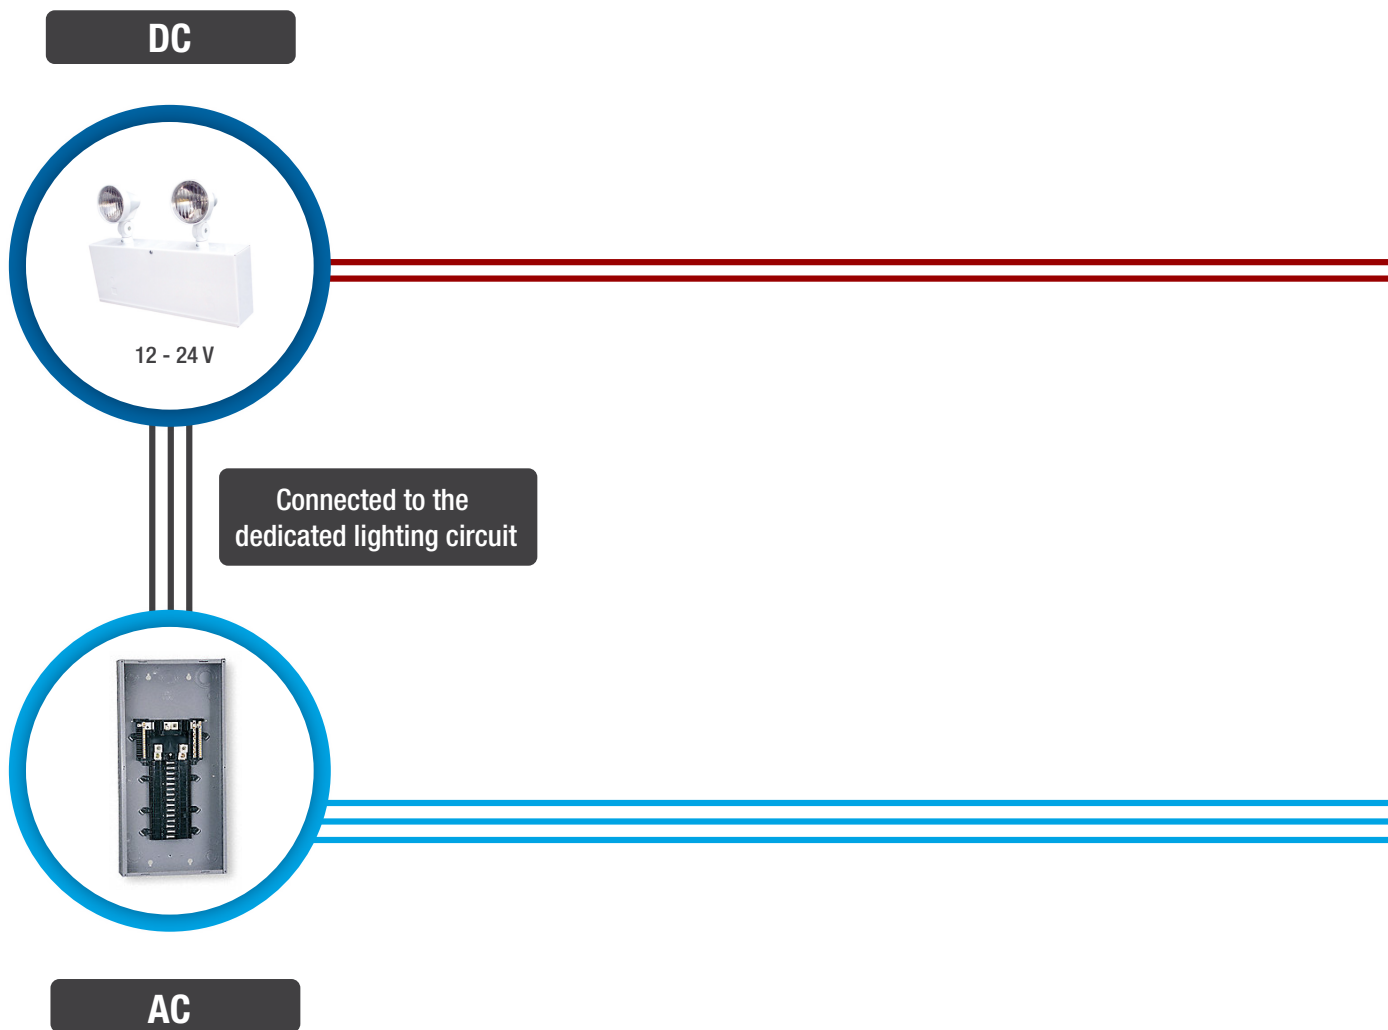


## LEGEND

 AC wires

 Connected to the dedicated lighting circuit

 DC wires

 LINK factory installed

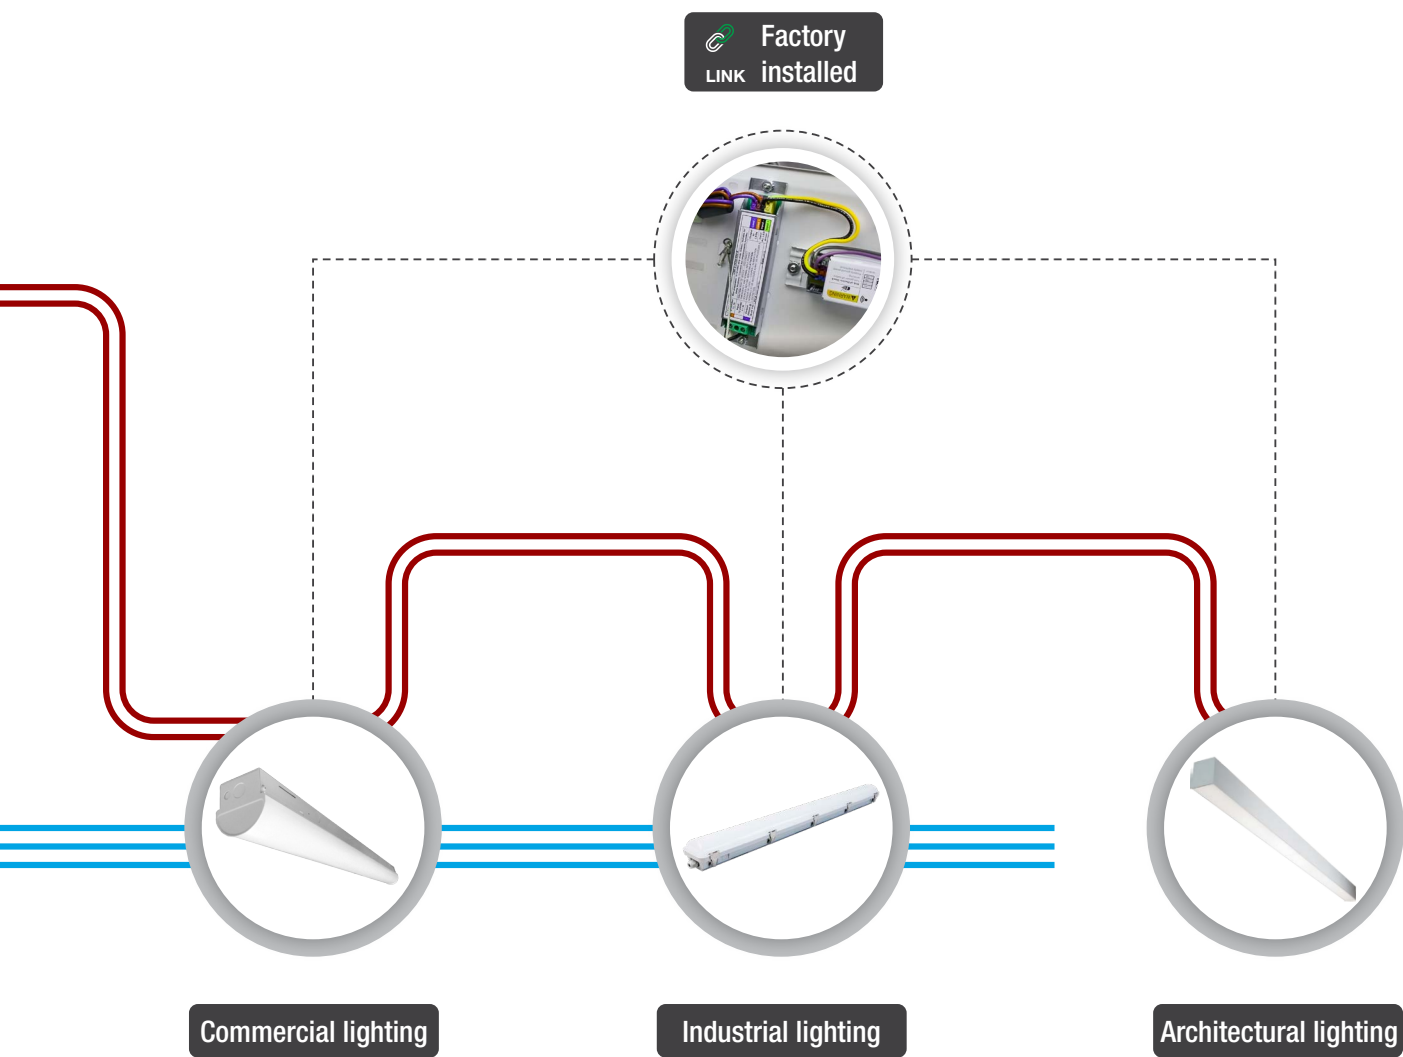

---

# PRODUCT OFFERING



**L3CBA**



**L2WSN**



**L3PNB**



**L2STR**



**L2TRV**



**L2STL**



**L1KOU**



**L2KOU**



**L3KOU**






**VTL4-L**



**VTL8-L**

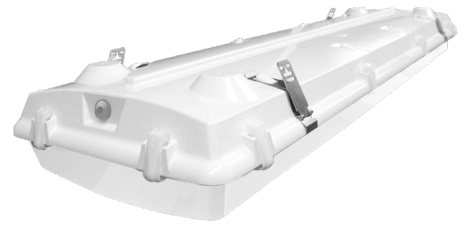

**FN-L**



**VN4-L**



**VN8-L**



**VT2-L**



**VT4-L**



**REC4-L**



**CR6**



**AR6**




# SPACING

BASED ON 8', 10' OR 12' MOUNTING HEIGHTS IN EMERGENCY MODE.


## INDOOR COMMODITY

### CENTER BASKET




Average spacing for 1 out of every 4 luminaires, normally ON in the path of egress, when at 8, 10, or 12 foot mounting heights.

## WRAPS




Average spacing for 1 out of every 4 luminaires, normally ON in the path of egress, when at 8, 10, or 12 foot mounting heights.

## PANEL LIGHTS

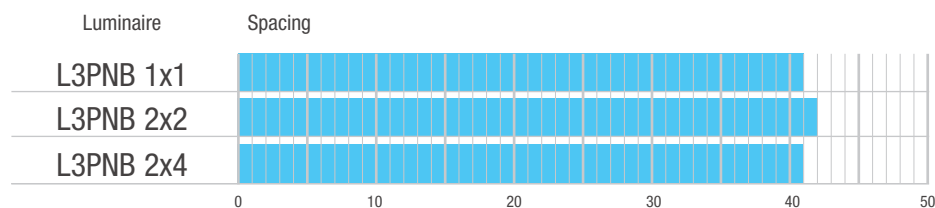


Average spacing for 1 out of every 4 luminaires, normally ON in the path of egress, when at 8, 10, or 12 foot mounting heights.

## STRIP LIGHTS

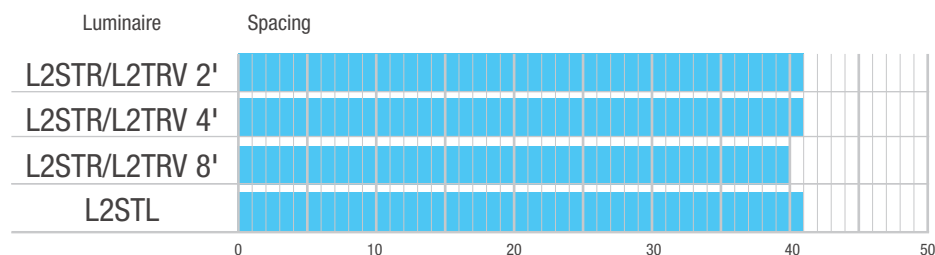


Average spacing for 1 out of every 4 luminaires, normally ON in the path of egress, when at 8, 10, or 12 foot mounting heights.

## ARCHITECTURAL LINEAR

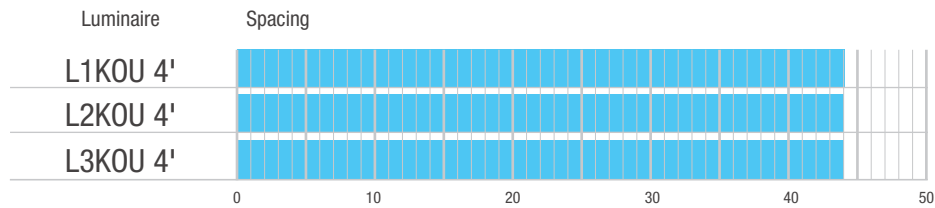

Average spacing for 1 out of every 4 luminaires, normally ON in the path of egress, when at 8, 10, or 12 foot mounting heights.


## VAPOR TIGHTS

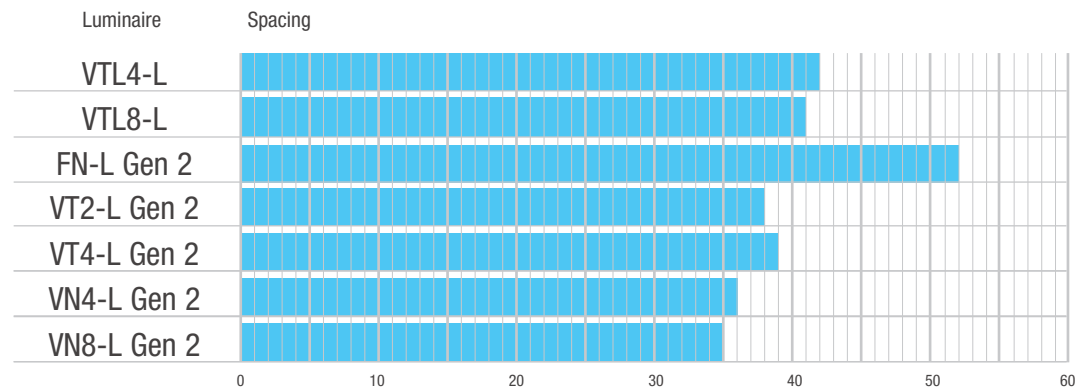

Average spacing for 1 out of every 4 luminaires, normally ON in the path of egress, when at 8, 10, or 12 foot mounting heights.


## RECESSED

### ARCHITECTURAL LED DOWNLIGHT 6"




Average spacing for 1 out of every 3 luminaires, normally ON in the path of egress, when at 8, 10, or 12 foot mounting heights.

### 6" COMMERCIAL LED DOWNLIGHT

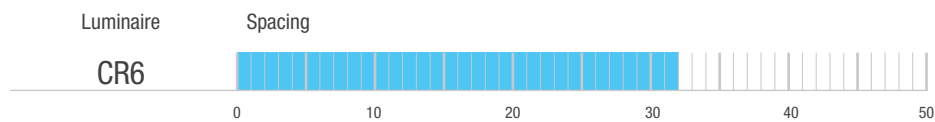

Average spacing for 1 out of every 3 luminaires, normally ON in the path of egress, when at 8, 10, or 12 foot mounting heights.

### 4" RECESSED LED



Average spacing for 1 out of every 3 luminaires, normally ON in the path of egress, when at 8, 10, or 12 foot mounting heights.



---

# INDOOR LIGHTING





## APPLICATIONS

- Commercial
- Industrial
- Retail
- Residential
- Coves and displays
- Task and general-area lighting

# L2STR

## LED STRIP

### 3 CCT AND 3 POWER SELECTABLE

Optional Emergency Remote



## DESCRIPTION

The L2STR series of versatile LED strips are designed to deliver efficient and high impact illumination. These luminaires feature a rounded lens that evenly diffuses the light and an innovative housing built for quick and easy installation. Whether for retrofit or new construction, the L2STR series is the ideal choice for a variety of commercial and industrial applications.

## LINK TECHNICAL SPECIFICATIONS IN EMERGENCY MODE

- Consumes 11 W of DC power
- 200 mA constant current
- Delivers 1 222 - 1 344 lumens in emergency mode
- Operates 12 - 24 V DC
- CSA certified as a C22.2 C141-15 emergency lighting luminaire
- Meets ICES-005 requirements
- Ease of maintenance when used with Stanpro emergency lighting battery units complete with auto test function
- Complements Stanpro's normally ON LED strip family

## ORDERING GUIDE

L2STR	—	L	—	/	/	
Series	Size	Lamp type	Lumen package (W) <sup>1</sup>	Volts (V AC)	Color temp. (K)	Options
L2STR	24 - 24"	L- LED	S1 - 20	Q - 120-347 W - 120-277 <sup>2</sup>	3C - 3 500/4 000/5 000	EL - LINK Normally ON emergency remote <sup>3,4</sup> DL - 8 W Emergency battery backup (120-277 V only) <sup>5</sup>
	48 - 48"		P40 - 25/30/40 P45 - 34/38/45 S2 - 56			
	96 - 96"		P90 - 65/75/90			

<sup>1</sup> See IES files or LUMEN SPECIFICATION TABLE for details.

<sup>2</sup> Only available for 48" and 96" luminaires when used with DL option.

<sup>3</sup> When in Emergency Model with EL option, half of the 96" luminaire will remain illuminated.

<sup>4</sup> When in Emergency Mode with EL option, luminaire only consumes 11 W.

<sup>5</sup> Only available for 48" and 96" luminaires in 120-277 V.

## APPLICATIONS

- Commercial
- Industrial
- Retail
- Residential
- Hallways
- Common Areas

# L2TRV

## TRI-LEVEL MOTION SENSOR LED STRIP

### 3 CCT AND 3 POWER SELECTABLE

Optional Emergency Remote



## DESCRIPTION

The L2TRV series of LED strips feature an integrated tri-level microwave motion sensor, preventing energy loss and increasing energy savings. These luminaires feature a rounded lens that evenly diffuses the light and an innovative housing designed for quick and easy installation. The L2TRV series is the perfect choice for applications requiring continuous lighting, such as hallways, common areas, parkades and stairwells.

## LINK TECHNICAL SPECIFICATIONS IN EMERGENCY MODE

- Consumes 11 W of DC power
- 200 mA constant current
- Delivers 1 222 - 1 344 lumens in emergency mode
- Operates 12 - 24 V DC
- CSA certified as a C22.2 C141-15 emergency lighting luminaire
- Meets ICES-005 requirements
- Ease of maintenance when used with Stanpro emergency lighting battery units complete with auto test function
- Complements Stanpro's normally ON tri-level motion sensor LED strip family.

## ORDERING GUIDE

L2TRV	—	L	—	/	/	
Series	Size	Lamp type	Lumen package (W) <sup>1</sup>	Volts (V AC)	Color temp. (K)	Options
L2TRV	24 - 24"	L- LED	S1 - 20	Q - 120-347 W - 120-277 <sup>2</sup>	3C - 3 500/4 000/5 000	EL - LINK Normally ON emergency remote <sup>3,4</sup> DL - 8 W Emergency battery backup (120-277 V only) <sup>5</sup>
	48 - 48"		P40 - 25/30/40 P45 - 34/38/45 S2 - 56			
	96 - 96"		P90 - 65/75/90			

<sup>1</sup> See IES files or LUMEN SPECIFICATION TABLE for details.

<sup>2</sup> Only available for 48" and 96" luminaires when used with DL option.

<sup>3</sup> When in Emergency Model with EL option, half of the 96" luminaire will remain illuminated.

<sup>4</sup> When in Emergency Mode with EL option, luminaire only consumes 11 W.

<sup>5</sup> Only available for 48" and 96" luminaires in 120-277 V.





# L2STL

## CONFIGURABLE LED STRIP

Optional Emergency Remote



## DESCRIPTION

These high quality luminaires are equipped with a frosted lens that diffuses the light comfortably. The L2STL series is a great option for retrofitting your traditional fluorescent linear luminaires to balance performance, aesthetics, and cost.

## LINK TECHNICAL SPECIFICATIONS IN EMERGENCY MODE

- Consumes 11 W of DC power
- 200 mA constant current
- Delivers 746 - 848 lumens in emergency mode
- Operates 12 - 24 V DC
- CSA certified as a C22.2 C141-15 emergency lighting luminaire
- Meets ICES-005 requirements
- Ease of maintenance when used with Stanpro emergency lighting battery units complete with auto test function
- Complements Stanpro's normally ON LED strip family

## ORDERING GUIDE

L2STL	—	L	—	/	/	
Series	Dimension	Lamp Type	Lumen package delivered <sup>1</sup>	Volts (V)	Color Temp. (K)	Options
L2STL	48 - 48"	L - DEL	S2A - 2 530 lumens (22 W) S3A - 3 710 lumens (35 W) S4A - 4 206 lumens (30 W)	A - 120 H - 347 W - 120-277	30K - 3 000 35K - 3 500 40K - 4 000 50K - 5 000	EL - LINK Normally ON emergency remote <sup>2</sup> DIM2 - Line voltage dimming, driver 120 V DALI1 - Digital addressable lighting interface driver <sup>3</sup> OS - Occupancy sensor <sup>4</sup> L6 - 6' white power cord (3-wire) L10 - 10' white power cord (3-wire) L12 - 12' white power cord (3-wire)

<sup>1</sup>See IES files for details.

<sup>2</sup>When in emergency mode, luminaire only consumes 11 W.

<sup>3</sup>Not available for 48" S2A and 347 V.

<sup>4</sup>To see available options, please consult the occupancy sensors section.



## APPLICATIONS

- Commercial and industrial buildings
- Offices areas
- General illumination applications

# L3CBA

## LED RECESSED CENTER BASKET

Optional Emergency Remote

## DESCRIPTION

The LED economic center basket features a classic design at an affordable price. This 1x4, 2x2 and 2x4 center basket provides specification grade, smooth and uniform ambient lighting.



ICES  
005



## LINK TECHNICAL SPECIFICATIONS IN EMERGENCY MODE

- Consumes 11 W of DC power
- 200 mA constant current
- Delivers 1 255 - 1 4 39 lumens in emergency mode
- Operates 12 - 24 V DC
- CSA certified as a C22.2 C141-15 emergency lighting luminaire
- Meets ICES-005 requirements
- Ease of maintenance when used with Stanpro emergency lighting battery units complete with auto test function
- Complements Stanpro's normally ON LED center basket family

## ORDERING GUIDE

L3CBA — — L — — — — / — — / — —

Series	Dimension	Lamp Type	Lumen package delivered (lm) <sup>1</sup>	CRI	Volts (V)	Color temp. (K)	Options
L3CBA	1 - 1' X 4' 2 - 2' X 2' 4 - 2' X 4'	L - LED	S1 S2 S3 S4	80 - 80+ 90 - 90+	A- 120 W- 120-277 H- 347	30K - 3 000 35K - 3 500 40K - 4 000 50K - 5 000	DIM2 - Line voltage dimming <sup>2</sup> DALI - Digital addressable lighting interface driver <sup>3</sup> OS - Occupancy sensor <sup>4</sup> DL - Emergency backup <sup>5</sup> EL - LINK Normally ON emergency remote <sup>6</sup>

<sup>1</sup> Refer to the technical specification table for more details

<sup>2</sup> Available in 120 V only

<sup>3</sup> Available in 120 - 277 V only

<sup>4</sup> To see available options please consult the occupancy sensors section

<sup>5</sup> Not available on 347V

<sup>6</sup> When in emergency mode, luminaire only consumes 11 W.

## APPLICATIONS

- Schools
- Corridors
- Restrooms
- Commercial buildings

# L2WSN

## LED SPECIFICATION GRADE WRAPAROUND

Optional Emergency Remote



ICES  
005



## DESCRIPTION

Stanpro's L2WSN is ideally suited for a variety of commercial applications where a decorative and robust fixture with efficient lighting is required.

## LINK TECHNICAL SPECIFICATIONS IN EMERGENCY MODE

- Consumes 11 W of DC power
- 200 mA constant current
- Delivers 827 - 1 405 lumens in emergency mode
- Operates 12 - 24 V DC
- CSA certified as a C22.2 C141-15 emergency lighting luminaire
- Meets ICES-005 requirements
- Ease of maintenance when used with Stanpro emergency lighting battery units complete with auto test function
- Complements Stanpro's normally ON LED wraparound family

## ORDERING GUIDE

L2WSN	—	48	L	—	/	/	
Series	Dimension	Lamp type	Lumen package <sup>1</sup> (lm)	Volts (V)	Color temp. (K)	Options	
L2WSN	48 - 48"	L - LED	S1 S2	A - 120 H - 347 W - 120-277	35K - 3 500 40K - 4 000 50K - 5 000	DIM2 <sup>2</sup> - Line voltage dimming driver 120 V only DALI1 - Digital addressable lighting interface driver DL - Emergency backup 120-277 V only D - Diffuser Mylar (10% more diffusion) OS <sup>3</sup> - Occupancy sensor EL - LINK Emergency Power conversion module	

<sup>1</sup> See technical specification table for details.

<sup>2</sup> Fixture functional in AC mode, when power goes off emergency battery unit powers LED boards. One battery unit per fixture is standard unless otherwise specified.

<sup>3</sup> To see available options, please consult the occupancy sensors section

## APPLICATIONS

- Offices
- Schools
- Commercial and institutional buildings

# L3PNB

## LED BACKLIT PANEL 3 CCT AND 3 POWER SELECTABLE

Optional Emergency Remote



## ORDERING GUIDE

L3PNB — L — / — /

Series	Size	Lamp type	Lumen Package (W) <sup>1</sup>	Volts (V)	Color Temperature (K) <sup>3</sup>	Options
L3PNB	1 - 1'X4'	L	S1 - 40	Q - 100-347 W - 100-277 <sup>2</sup>	40K - 4 000 3C - 3 500/4 000/5 000	ARTXXX - Artwork <sup>4</sup> DL - Emergency back up <sup>5,7</sup> EL - LINK Normally ON emergency remote <sup>5,6</sup> OS - Occupancy Sensor <sup>7</sup>
	2 - 2'X2'		PS - 20/30/40 PS40P - 20/30/40			
	4 - 2'X4'		S1 - 50 PS - 30/40/50 PS50P - 30/40/50			

<sup>1</sup> See IES files or lumen specification table for more details.

<sup>2</sup> Offered with DL and OS options.

<sup>3</sup> 40K offered only with S1 lumen package, 3C offered with PS and PS40P & PS50P lumen packages.

<sup>4</sup> Customer to supply the artwork, which is a high resolution image of at least 300 DPI or EPS (Vector format).

<sup>5</sup> Suspended and surface mounting is not available when DL and EL options are selected.

<sup>6</sup> When in emergency mode, luminaire only consumes 11 W.

<sup>7</sup> Only available for 120-277V.

For emergency lighting spacing, please see page 5.

## DESCRIPTION

Stanpro's L3PNB LED panel lights utilize next-generation backlit technology, ensuring high performance, superior uniformity, and reduced glare. Featuring a 120-347 V driver and the versatility to change the colour temperature and lumen output with a simple switch, the L3PNB series is the premier and cost-effective solution for reducing stocking inventory. These commercial grade LED panels lights are the ideal replacement for traditional fluorescent fixtures in offices, schools, and commercial buildings.

## LINK TECHNICAL SPECIFICATIONS IN EMERGENCY MODE

- Consumes 11 W of DC power
- 200 mA constant current
- Delivers 979 - 1 286 lumens in emergency mode
- Operates 12 - 24 V DC
- CSA certified as a C22.2 C141-15 emergency lighting luminaire
- Meets ICES-005 requirements
- Ease of maintenance when used with Stanpro emergency lighting battery units complete with auto test function
- Complements Stanpro's normally ON LED backlit panel family
- Available in 1x4, 2x2 or 2x4





---

# KOLIKA



# KOLIKA - L1KOU

## LED LINEAR SUSPENDED

Continuous run from 2' to 100'

Optional Emergency Remote



LED  
fixture



dimmmable  
fixture

6

damp  
location



ICES  
005



### DESCRIPTION

The Kolika GEN 2 is a robust LED luminaire that offers a high-power source that is ideal for work and commercial spaces.

The Kolika series allows you to achieve a consistently simple and elegant look throughout a space, without compromising the efficiency.

### LINK TECHNICAL SPECIFICATIONS IN EMERGENCY MODE

- Consumes 11 W of DC power
- 200 mA constant current
- Delivers 996 - 1 061 lumens in emergency mode
- Operates 12 - 24 V DC
- CSA certified as a C22.2 C141-15 emergency lighting luminaire
- Meets ICES-005 requirements
- Ease of maintenance when used with Stanpro emergency lighting battery units complete with auto test function
- Complements Stanpro's normally ON LED linear suspended family

### ORDERING GUIDE

L1KOU — L — — — — — — — — — —										
Series	Size <sup>1</sup>	Lamp type	Lumen package (lm/ft)	CRI	Volts (V)	Color temp. (K)	Casting color	Power cable finish	Canopy finish	Options
L1KOU	02 - 2' 03 - 3' 04 - 4' 05 - 5' 06 - 6' 07 - 7' 08 - 8' 09 - 9' 10 - 10' 11 - 11' 12 - 12' 13 - 13' 14 - 14' 15 - 15' 16 - 16' 17 - 17' 18 - 18' 19 - 19' 20 - 20' 21 - 21'	L - LED	S1 - 375 S2 - 500 S3 - 750 S4 - 1 000	80 - 80+ 90 - 90+	A - 120 W - 120-277 H - 347	30K - 3 000 35K - 3 500 40K - 4 000 50K - 5 000	S - Silver W - White B - Black SP <sup>6</sup> - Special color	S - Silver W - White B - Black	S - Silver W - White B - Black	DIM2 - Line voltage driver 120 V DALI1 - Digital addressable lighting interface driver (Not available in 347 V) L - Aviation cable and wire (6' standard) EL1 <sup>2,5</sup> - 1 LINK Normally ON emergency remote EL2 <sup>3,5</sup> - 2 LINK Normally ON emergency remote EL <sup>4,5</sup> - LINK Normally ON emergency remote

<sup>1</sup> For lengths longer than 21', please consult factory.

<sup>2</sup> EL1 LINK Normally On option for lengths 2' to 8', only up to 4' lighted up in emergency mode.


<sup>3</sup> EL2 LINK Normally On option for lengths 5' to 8', full length lighted up in emergency mode.

# KOLIKA - L2KOU

## LED LINEAR SURFACE

Continuous run from 2' to 100'

Optional Emergency Remote

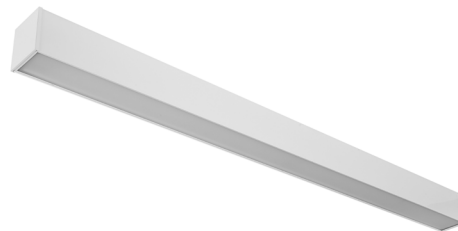

ICES  
005



### DESCRIPTION

The Kolika GEN 2 is a robust LED luminaire that offers a high-power source that is ideal for work and commercial spaces.

The Kolika series allows you to achieve a consistently simple and elegant look throughout a space, without compromising the efficiency.

### LINK TECHNICAL SPECIFICATIONS IN EMERGENCY MODE

- Consumes 11 W of DC power
- 200 mA constant current
- Delivers 996 - 1 061 lumens in emergency mode
- Operates 12 - 24 V DC
- CSA certified as a C22.2 C141-15 emergency lighting luminaire
- Meets ICES-005 requirements
- Ease of maintenance when used with Stanpro emergency lighting battery units complete with auto test function
- Complements Stanpro's normally ON LED linear surface family

### ORDERING GUIDE

L2KOU	L							
Series	Size <sup>1</sup>	Lamp type	Lumen package (lm)	CRI	Volts (V)	Color temp. (K)	Casting color	Options
L2KOU	02 - 2' 03 - 3' 04 - 4' 05 - 5' 06 - 6' 07 - 7' 08 - 8' 09 - 9' 10 - 10' 11 - 11' 12 - 12' 13 - 13' 14 - 14' 15 - 15' 16 - 16' 17 - 17' 18 - 18' 19 - 19' 20 - 20' 21 - 21'	L - LED	S1 - 375 S2 - 500 S3 - 750 S4 - 1 000	80 - 80+ 90 - 90+	A - 120 W - 120-277 H - 347	30K - 3 000 35K - 3 500 40K - 4 000 50K - 5 000	S - Silver W - White B - Black SP <sup>6</sup> - Special color	DIM2 - Line voltage driver 120 V DALI1 - Digital adressable lighting interface driver (Not available in 347 V) EL1 <sup>2,5</sup> - 1 LINK Normally ON emergency remote EL2 <sup>3,5</sup> - 2 LINK Normally ON emergency remote EL <sup>4,5</sup> - LINK Normally ON emergency remote

<sup>1</sup> For lengths longer than 21', please consult factory.

<sup>2</sup> EL1 LINK Normally On option for lengths 2' to 8', only up to 4' lighted up in emergency mode.

<sup>3</sup> EL2 LINK Normally On option for lengths 5' to 8', full length lighted up in emergency mode.

# KOLIKA - L3KOU

## LED LINEAR RECESSED

Continuous run from 2' to 100'

Optional Emergency Remote



### DESCRIPTION

The Kolika GEN 2 is a robust LED luminaire that offers a high-power source that is ideal for work and commercial spaces. The Kolika series allows you to achieve a consistently simple and elegant look throughout a space, without compromising the efficiency.

### LINK TECHNICAL SPECIFICATIONS IN EMERGENCY MODE

- Consumes 11 W of DC power
- 200 mA constant current
- Delivers 996 - 1 061 lumens in emergency mode
- Operates 12 - 24 V DC
- CSA certified as a C22.2 C141-15 emergency lighting luminaire
- Meets ICES-005 requirements
- Ease of maintenance when used with Stanpro emergency lighting battery units complete with auto test function
- Complements Stanpro's normally ON LED linear recessed family



ICES  
005



C US



### ORDERING GUIDE

Series	Size <sup>1</sup>	Lamp type	Lumen package (lm/ft)	CRI	Volts (V)	Color temp. (K)	Casting color	Options
L3KOU	02 - 2' 03 - 3' 04 - 4' 05 - 5' 06 - 6' 07 - 7' 08 - 8' 09 - 9' 10 - 10' 11 - 11' 12 - 12' 13 - 13' 14 - 14' 15 - 15' 16 - 16' 17 - 17' 18 - 18' 19 - 19' 20 - 20' 21 - 21'	L - LED	S1 - 375 S2 - 500 S3 - 750 S4 - 1 000	80 - 80+ 90 - 90+	A - 120 W - 120-277 H - 347	30K - 3 000 35K - 3 500 40K - 4 000 50K - 5 000	S - Silver W - White B - Black SP <sup>6</sup> - Special color	DIM2 - Line voltage driver 120 V DALI1 - Digital adressable lighting interface driver (Not available in 347 V) EL1 <sup>2,5</sup> - 1 LINK Normally ON emergency remote EL2 <sup>3,5</sup> - 2 LINK Normally ON emergency remote EL <sup>4,5</sup> - LINK Normally ON emergency remote

<sup>1</sup> For lengths longer than 21', please consult factory.

<sup>2</sup> EL1 LINK Normally On option for lengths 2' to 8', only up to 4' lighted up in emergency mode.

<sup>3</sup> EL2 LINK Normally On option for lengths 5' to 8', full length lighted up in emergency mode.



---

# VAPOR TIGHT



# VTL4-L GEN. 2

## LINEAR 3 CCT & 3 POWER SELECTABLE SERIES

Optional Emergency Remote



Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at [www.designlights.org/search](http://www.designlights.org/search).

### APPLICATIONS

- Parking garages
- Subway

### ORDERING GUIDE

VTL4	—	—	—	3C	/	
Series	Lumen package (W)	Volts (V)	Color temp. (K)	Options		
VTL4	PS42B - 30/35/42 PS65B - 30/45/65	Q - 120-347	3C - 3 500 4 000 5 000	BLANK -	No sensor	
				OS <sup>1,2</sup> -	Occupancy sensor	
				DIM1 <sup>3</sup> -	5 wire cable for AC and 0-10 V dimming	
				EL1 <sup>4</sup> -	LINK Normal ON emergency remote	
				DL <sup>3,5</sup> -	Emergency back up (0°C - 25°C)	
				KV -	10 kV surge protector	
				L6 -	6' white power cord	
				L10 -	10' white power cord	
				L6-BK -	6' black power cord	
				L10-BK -	10' black power cord	
				CH <sup>6</sup> -	Center hole 7/8"	
				AC <sup>7,8</sup> -	Aviation cable kit	
				PVM -	Pivot mount brackets (surface mount ceiling and wall)	
				BM -	Smart module	
				BMS -	Smart module & sensor	

<sup>1</sup>To see available options, please consult the occupancy sensors section

<sup>2</sup>When selecting AC or DIM1 option, please also select cable option whether L6, L10, L6-BK or L10-BK. DL option not compatible with DIM1

<sup>3</sup>The options DL and OSI are not compatible together

<sup>4</sup>When selecting CH, OS (external) and DL options, the fixture maintains wet location status, however NEMA 4X and IP rating are not applicable

<sup>5</sup>Aviation cable length based on selected power cable length

<sup>6</sup>Fixture functional in AC mode, when power goes off emergency bodine (DL) powers LED boards.

One bodine per fixture is standard

<sup>7</sup>The LINK Emergency Power conversion module is compatible with all the following configurations: PS42B and PS65B. Not compatible with the following options: CH, DL, OS (external)

When in Emergency Mode, unit only consumes 11 watts

### DESCRIPTION

A 4' luminaire ideal for a variety of industrial, commercial and residential applications. Installed either indoors or outside, the VTL4-L provides superior light distribution. Intended for applications where moisture and/or dust may be present. Also appropriate for those applications that may require: washability/hose down, complete containment of the LEDs, the ability to withstand reduced temperatures and withstand moderate impact. Seals dust out.

### LINK TECHNICAL SPECIFICATIONS IN EMERGENCY MODE

- Consumes 11 W of DC power
- 200 mA constant current
- Delivers 1 216 - 1 346 lumens in emergency mode
- Operates 12 - 24 V DC
- CSA certified as a C22.2 C141-15 emergency lighting luminaire
- Meets ICES-005 requirements
- Ease of maintenance when used with Stanpro emergency lighting battery units complete with auto test function
- Complements Stanpro's normally ON vapor tight family

# VTL8-L GEN. 2

## LINEAR 3 CCT & 3 POWER SELECTABLE SERIES

Optional Emergency Remote



Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at [www.designlights.org/search](http://www.designlights.org/search).

### DESCRIPTION

This 8' luminaire ideal for a variety of industrial and commercial applications. Installed either indoors or outdoors, the VTL8-L provides superior light distribution and is intended for environments where moisture and/or dust may be present. Perfect for applications requiring the complete containment of LEDs for easy washability and hose down. The VTL8-L series can withstand reduced temperatures and moderate impact.

### LINK TECHNICAL SPECIFICATIONS IN EMERGENCY MODE

- Consumes 11 W of DC power
- 200 mA constant current
- Delivers 1 120 - 2 400 lumens in emergency mode
- Operates 12-24 V DC
- CSA certified as a C22.2 C141-15 emergency lighting luminaire
- Meets ICES-005 requirements
- Ease of maintenance when used with Stanpro emergency lighting battery units complete with auto test function
- Complements Stanpro's normally ON vapor tight family

### ORDERING GUIDE

VTL8		Q		3C	
Series	Lumen package (lm)	Volts (VAC)	Color temp. (K)	Options	
VTL8	LS1B - 65 PS110B - 65/75/90/110	Q - 120-347	3C - 3 500/4 000/5 000	Blank - No sensor OS <sup>1,2</sup> - Occupancy sensor DIM1 <sup>3</sup> - 5 wire cable for AC and 0-10 V dimming L6 - 6 ft white power cord L10 - 10 ft white power cord L6-BK - 6 ft black power cord L10-BK - 10 ft black power cord EL1 <sup>4</sup> - 1 LINK Normally ON emergency EL2 <sup>4</sup> - 2 LINK Normally ON emergency DL <sup>2,5,6</sup> - Emergency back up (0°C - 25°C) KV - 10 kV surge protection CH <sup>4</sup> - Center hole 7/8" AC <sup>4</sup> - Aviation cable kit BM - Smart module BMS - Smart module & sensor	

<sup>1</sup> To see available options, please consult the occupancy sensors section

<sup>2</sup> When selecting AC or DIM1 option, please also select cable option whether L6, L10, L6-BK or L10-BK. DL option not compatible with DIM1

<sup>3</sup> When selecting CH, OS (external) and DL options, the fixture maintains wet location status, however NEMA 4X and IP rating are not applicable

<sup>4</sup> Aviation cable length based on selected power cable length

<sup>5</sup> Fixture functional in AC mode, when power goes off emergency driver (DL) powers LED boards. One emergency driver per fixture is standard unless otherwise specified

<sup>6</sup> Emergency backup only available for 120-277 V

<sup>7</sup> The LINK Emergency Power conversion module is compatible with all the following configurations: PS110B. Not compatible with the following options: DL, OS (external). When in Emergency Mode, unit only consumes 11 watts

# VTL8-L

## LINEAR 8' SERIES

### Optional Emergency Remote



Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at [www.designlights.org/search](http://www.designlights.org/search).

### APPLICATIONS

- Parking garages
- Stairwells

### DESCRIPTION

A 8' luminaire ideal for a variety of industrial, commercial and residential applications. Installed either indoors or outdoors, the VTL8-L provides superior light distribution. Intended for applications where moisture and/or dust may be present. Also appropriate for those applications that may require: washability/ hose down, complete containment of the LEDs, the ability to withstand reduced temperatures and withstand moderate impact. Seals dust out.

### LINK TECHNICAL SPECIFICATIONS IN EMERGENCY MODE

- Consumes 11 W of DC power
- 200 mA constant current
- Delivers 1 645 - 3 366 lumens in emergency mode
- Operates 12 - 24 V DC
- CSA certified as a C22.2 C141-15 emergency lighting luminaire
- Meets ICES-005 requirements
- Ease of maintenance when used with Stanpro emergency lighting battery units complete with auto test function
- Complements Stanpro's normally ON vapor tight family

### ORDERING GUIDE

VTL8	L		Q		
Series	Lamp type	Lumen package (lm)	Volts (V)	Color temp. (K)	Options
VTL8	L - LED	S1 - 8 450 S1A - 11 700 S3 - 15 000	Q - 120-347	40K - 4 000 50K - 5 000	Blank - No sensor OS <sup>1</sup> - Occupancy sensor DIM1 <sup>2</sup> - 5 wire cable for AC and 0-10 V dimming L6 - 6 ft white power cord L10 - 10 ft white power cord L6-BK - 6 ft black power cord L10-BK - 10 ft black power cord EL1 - 1 LINK Normally ON emergency EL2 <sup>3</sup> - 2 LINK Normally ON emergency DL <sup>3,4,5</sup> - Emergency back up (0°C - 25°C) KV - 10 kV surge protection CH <sup>6</sup> - Center hole 7/8" AC - Aviation cable kit

<sup>1</sup> To see available options, please consult the occupancy sensors section.

<sup>2</sup> When selecting DIM1 option please also select cable option whether L6, L10, L6-BK or L10-BK.

<sup>3</sup> Fixture functional in AC mode, when power goes off emergency bodine powers LED boards. One bodine per fixture is standard.

<sup>4</sup> Only on LS3.

<sup>5</sup> Emergency Backup only available for 120-277 V.

<sup>6</sup> When selecting CH, OS (external) and DL options, the fixture maintains wet location status, however NEMA 4X and IP rating are not applicable.

# VN4-L GEN2

## LINEAR 4' WASHDOWN SERIES Optional Emergency Remote




### DESCRIPTION

The 4' sealed linear luminaires are for those applications that may require: washability/hose down, complete containment of the LEDs, the ability to withstand reduced temperatures and withstand moderate impact.

### LINK TECHNICAL SPECIFICATIONS IN EMERGENCY MODE

- Consumes 11 W of DC power
- 200 mA constant current
- Delivers 1 179 - 1 364 lumens in emergency mode
- Operates 12 - 24 V DC
- CSA certified as a C22.2 C141-15 emergency lighting luminaire
- Meets ICES-005 requirements
- Ease of maintenance when used with Stanpro emergency lighting battery units complete with Auto test function
- Complements Stanpro's normally ON VN4-L 4' vaportight family.

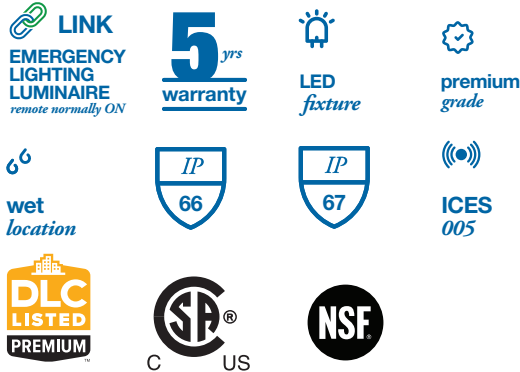

Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at [www.designlights.org/search](http://www.designlights.org/search).

### ORDERING GUIDE

VN4 — L — — — — — / — — — — — / — — — — —						
Series	Lamp type	Lumen package (lm)	CRI	Volts (V)	Color temp. (K)	Options
VN4	L - LED	S1B - Refer to the technical specification table for more details S2B - S3B - S4B - S5B -	80 - 80+ 90 <sup>7</sup> - 90+	A - 120 H - 347 W - 120-277	30K - 3 000 35K - 3 500 40K - 4 000 50K - 5 000	L6 - 6' white power cable length L10 - 10' white power cable length L6-BK - 6' black power cable length L10-BK - 10' black power cable length SS - Stainless steel latches KV - 10kV surge protector TP <sup>1</sup> - Vandal Resistant Kit (includes 6pcs screws) DL <sup>2,11</sup> - AC and Emergency backup (from 0°C - 25°C) 120 V, 120-277 V DIM1 <sup>3</sup> - 5 wire cable for AC and 0-10 V dimming DIM2 <sup>4</sup> - Leading edge dimming 120 V only PC - Polycarbonate ribbed frosted lens SCAL - Smooth clear acrylic lens SFAL - Smooth frosted acrylic lens SCPL - Smooth clear polycarbonate lens SFPL - Smooth frosted polycarbonate lens OS <sup>5</sup> - Occupancy sensor AC <sup>6</sup> - Aviation cable kit EL <sup>8</sup> - LINK Normally ON Emergency Remote RMP-05 <sup>9,11</sup> - Rigid mono point on the luminaire with 3/4" center hole for 1/2 NPT conduit RMP-075 <sup>9,11</sup> - Rigid mono point on the luminaire with 1" center hole for 3/4 NPT conduit RGB-45 <sup>10</sup> - 45° mount bracket

<sup>1</sup> 1 tamper proof bit (HAR06-TPBIT-UDR) included per order. Please consult the accessory table to order additional quantities.

<sup>2</sup> Fixture functional in AC mode, when power goes off emergency bodine powers LED boards. One bodine per fixture is standard unless otherwise specified. Not compatible with the following options: EL, RMP-05, RMP-075.

<sup>3</sup> When selecting DIM1 option please also select cable option whether L6, L10, L6-BK or L10-BK. DL option is not compatible with DIM1.

<sup>4</sup> DIM2 is for S1B, S2B and S3B lumen packages.

<sup>5</sup> To see available options, please consult the occupancy sensors section.

<sup>6</sup> Aviation cable length based on selected power cable length.

<sup>7</sup> 90 CRI option may decrease lumen output from 15% to 19% depending on the CCT.

<sup>8</sup> The LINK Emergency Power conversion module is compatible with all the following all configurations: LS1B, LS2B, LS3B, LS4B, LS5B. Not compatible with the following options: DL, EH, OS (external), RMP-05, RMP-075. When in Emergency Mode, luminaire only consumes 11W.

<sup>9</sup> RMP-05 and RMP-075 are not available for LS5B lumen package.

<sup>10</sup> Horizontal wall mount or ceiling mount.

<sup>11</sup> When selecting DL, RMP-05 and RMP-075 options, the fixture maintains wet location status, however NEMA 4X and IP ratings are no longer applicable.



# VN8-L GEN2

## LINEAR 8' WASHDOWN SERIES

Optional Emergency Remote



### APPLICATIONS

- Food processing facilities
- Commercial kitchens
- Brewery and bottling facilities
- Industrial facilities
- Livestock containment building
- Parking garages

### ORDERING GUIDE

VN8 — L — — — — — / — — — — — / — — — — —						
Series	Lamp type	Lumen package (lm)	CRI	Volts (V)	Color temp. (K)	Options
VN8	L - LED	S1B - Refer to the S2B - technical S3B - specification S4B - table for S5B - more details	80 - 80+ 90 <sup>7</sup> - 90+	A - 120 H - 347 W - 120-277	30K - 3 000 35K - 3 500 40K - 4 000 50K - 5 000	L6 - 6' white power cable length L10 - 10' white power cable length L6-BK - 6' black power cable length L10-BK - 10' black power cable length SS - Stainless steel latches (set of 10pcs) KV - 10kV Surge protector TP <sup>1</sup> - Vandal Resistant Kit (includes 6pcs tamper proof screws) DL <sup>2, 10</sup> - Emergency backup 120 V and 120-277 V only DIM1 <sup>3</sup> - 5 wire cable for AC and 0-10 V dimming DIM2 <sup>4</sup> - Leading edge dimming 120 V only SCAL - Smooth clear acrylic lens SFAL - Smooth frosted acrylic lens SCPL - Smooth clear polycarbonate lens SFPL - Smooth frosted polycarbonate lens OS <sup>5</sup> - Occupancy sensor AC <sup>6</sup> - Aviation cable kit EL1 <sup>8</sup> - 1 LINK Normally ON Emergency Remote EL2 <sup>8</sup> - 2 LINK Normally ON Emergency Remote RGB-45 <sup>9</sup> - Mount bracket (45°)

<sup>1</sup> 1 tamper proof bit (HAR06-TPBIT-UDR) included per order. Please consult the accessory table to order additional quantities.

<sup>2</sup> Fixture functional in AC mode, when power goes off emergency battery powers LED boards. One battery per fixture is standard unless otherwise specified.

<sup>3</sup> When selecting DIM1 option please also select cable option whether L6, L10, L6-BK or L10-BK. DL option is not compatible with DIM1.

<sup>4</sup> DIM2 is for S1B, S2B and S3B lumen packages.

<sup>5</sup> To see available options, please consult the occupancy sensors section.

<sup>6</sup> Aviation cable length based on selected power cable length

<sup>7</sup> 90 CRI option may decrease lumen output from 15% to 19% depending on CCT.

<sup>8</sup> The LINK Normally ON Emergency Remote is compatible with all configurations: EL1 - LS1B, LS2B, LS3B, LS4B, LS5B; EL2 - LS4B, LS5B. Not compatible with the following options: DL, EH, OS (external). When in Emergency Mode, luminaire only consumes 11W.

<sup>9</sup> Horizontal wall mount or ceiling mount.

<sup>10</sup> When selecting DL, RMP-05 and RMP-075 options, the fixture maintains wet location status, however NEMA 4X and IP ratings are no longer applicable.

### DESCRIPTION

The 8' sealed linear luminaires are for those applications that may require: washability/hose down, complete containment of the LEDs, the ability to withstand reduced temperatures and withstand moderate impact.

### LINK TECHNICAL SPECIFICATIONS IN EMERGENCY MODE

- Consumes 11 W of DC power
- 200 mA constant current
- Delivers 1 139 - 1 351 lumens in emergency mode
- Operates 12 - 24 V DC
- CSA certified as a C22.2 C141-15 emergency lighting luminaire
- Meets ICES-005 requirements
- Ease of maintenance when used with Stanpro emergency lighting battery units complete with auto test function
- Complements Stanpro's normally ON LED vapor tight family

# FN-L GEN2

## LED VAPOR TIGHT HIGH BAY

Optional Emergency Remote



### DESCRIPTION

The FN-L series is a suitable design for both indoor and outdoor applications where dust and water resistance are required. Designed for easy assembly and maintenance. Appropriate for environments that may require: washability/hose down, complete containment of the LEDs, the ability to withstand reduced temperatures and moderate impact.

### LINK TECHNICAL SPECIFICATIONS IN EMERGENCY MODE

- Consumes 11 W of DC power
- 200 mA constant current
- Delivers 1 322 - 1 446 lumens in emergency mode
- Operates 12 - 24 V DC
- CSA certified as a C22.2 C141-15 emergency lighting luminaire
- Meets ICES-005 requirements
- Ease of maintenance when used with Stanpro emergency lighting battery units complete with auto test function
- Complements Stanpro's normally ON LED vapor tight family



### APPLICATIONS

- Food processing
- Beverage industry
- Manufacturing and warehousing
- Gymnasiums
- Freezers

### ORDERING GUIDE

Series	Lamp type	Lumen package (lm)	CRI	Volts (V)	Color temp. (K)	Options
FN	L - LED	S1B } Refer to the S2B } technical S3B } specification S4B } table for S5B } more details	80 - 80 90 <sup>5</sup> - 90	A - 120 H - 347 W - 120-277	30K - 3 000 35K - 3 500 40K - 4 000 50K - 5 000	DIM1 <sup>1</sup> - 5 wire cable for AC and 0-10 V dimming DIM2 <sup>2</sup> - Leading edge dimming 120 V only L6 - 6' white power cable length L10 - 10' white power cable length L6-BK - 6' black power cable length L10-BK - 10' black power cable length AC - Aviation cable kit OS <sup>3</sup> - Occupancy sensor DL <sup>4,7</sup> - Emergency back up (from 0°C to +25°C) 120 V and 120-277 V only U347 - Male 347 V twist lock plug CMB - Ceiling mounting bracket KV - 10kV surge protector RMB - Rigid mounting bracket SS - Stainless steel latches (set of 10pcs) EL1 <sup>6</sup> - 1 LINK Normally ON Emergency Remote EL2 <sup>6</sup> - 2 LINK Normally ON Emergency Remote EL3 <sup>6</sup> - 3 LINK Normally ON Emergency Remote U120 - Male 120 V twist lock plug LT - Lens tether PC - Polycarbonate frosted lens

<sup>1</sup> When selecting DIM1 option please also select cable option whether L6, L10, L6-BK, L10-BK. DL option is not compatible with DIM1.

<sup>2</sup> DIM2 is for S3B lumen package only.

<sup>3</sup> To see available options, please consult the occupancy sensors section.

<sup>4</sup> Fixture functional in AC mode, when power goes off emergency battery powers LED boards. One battery per fixture is standard unless otherwise specified.

<sup>5</sup> 90 CRI option may decrease lumen output from 15% to 19% depending on CCT.


<sup>6</sup> The LINK Normally ON Emergency Remote is compatible with the following configurations: EL1 - LS1B, LS2B, LS3B, LS4B, LS5B; EL2 - LS3B, LS4B, LS5B; EL3: LS4B, LS5B. Not compatible with the following options: DL, EH, OS (external). When in Emergency Mode, luminaire only consumes 11W.

<sup>7</sup> NEMA 4X certification and IP ratings are not applicable when selecting DL option.

# VT2-L GEN2

## 2' LED VAPOR TIGHT

Optional Emergency Remote

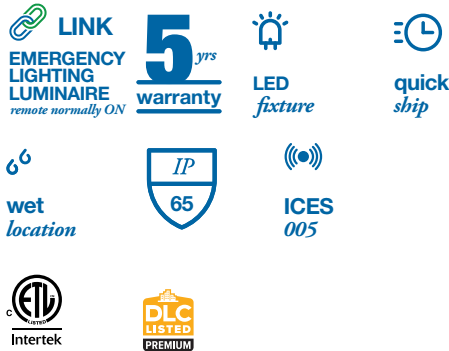

### APPLICATIONS

- Industrial facilities
- Stairwells
- Parking garages
- Exterior retail areas
- Transportation
- Pedestrian tunnels

### ORDERING GUIDE

Series	Lamp type	Lumen package (lm)	CRI	Volts (V)	Color temp. (K)	Options
VT2	L - LED	S1B } Refer to the technical specification table for more details S2B }	80 - 80+ 90 <sup>11</sup> - 90+	A - 120 H - 347 W - 120-277	30K - 3 000 35K - 3 500 40K - 4 000 50K - 5 000	L6 - 6' power cable length L10 - 10' power cable length AC <sup>1</sup> - Aviation cable SS - Stainless steel latches (set of 10pcs) OS <sup>2</sup> - Occupancy sensor EL <sup>3,12</sup> - LINK Normally ON Emergency Remote DL <sup>4,13</sup> - AC and Emergency backup (from 0°C - 25°C) 120 V, 120-277 V DIM1 <sup>5</sup> - 0-10 V internal dimming wires ready to connect DIM2 <sup>6</sup> - Line voltage dimming driver 120 V KV - 10kV Surge protector TP <sup>7</sup> - Vandal Resistant Kit (includes 6pcs tamper proof screws) RMB-05 <sup>8</sup> - Rigid mono point on bracket with 3/4" center hole for 1/2 NPT conduit RMB-075 <sup>8</sup> - Rigid mono point on bracket with 1" center hole for 3/4 NPT conduit RMP-05 <sup>8,13</sup> - Rigid mono point on the luminaire with 3/4" center hole for 1/2 NPT conduit RMP-075 <sup>8,13</sup> - Rigid mono point on the luminaire with 1" center hole for 3/4 NPT conduit PVPM-05 <sup>8</sup> - Rigid mono point on pivot mount bracket with 3/4" center hole and 1/2 NPT PVPM-075 <sup>8</sup> - Rigid mono point on pivot mount bracket with 1" center hole and 3/4 NPT PVM <sup>8</sup> - Surface mount brackets with pivot (set of 2) EH <sup>9</sup> - Additional 7/8" end hole with wet location gland CH <sup>10</sup> - 7/8" center hole with wet location gland

<sup>1</sup> Aviation cable length based on selected power cable length.

<sup>2</sup> To see available options, please consult the occupancy sensors section.

<sup>3</sup> Contact factory for availability.

<sup>4</sup> DL option is not compatible with OS (internal).

<sup>5</sup> DIM1 option must select L6 or L10. DL option is not compatible with DIM1.

<sup>6</sup> DIM2 option is not compatible with OS (internal).

<sup>7</sup> 1 tamper proof bit (HAR06-TPBIT-UDR) included per order. Please consult the accessory table to order additional quantities.

<sup>8</sup> See Mounting Options table.

<sup>9</sup> Luminaire includes 1 end hole with wet location gland for main power connection. The /EH option offers a second end hole with wet location gland on the opposite side of the luminaire.

<sup>10</sup> Use plug (included with the luminaire) to block End Hole, if not in use.

<sup>11</sup> 90 CRI option may decrease lumen output from 15% to 19% depending on CCT.

<sup>12</sup> The LINK Emergency Power conversion module is compatible with all the following all configurations: LS1B, LS2B. Not compatible with the following options: DL, EH, OS (external), RMP-05, RMP-075. When in Emergency Mode, luminaire only consumes 11W.

<sup>13</sup> When selecting DL, RMP-05 and RMP-075 options, the fixture maintains wet location status, however IP rating is no longer applicable.

### DESCRIPTION

A luminaire ideal for a variety of indoor/outdoor industrial and commercial applications. Intended for environments where moisture and/or dust may be present. Ideal for garages and stairwell.

### LINK TECHNICAL SPECIFICATIONS IN EMERGENCY MODE

- Consumes 11 W of DC power
- 200 mA constant current
- Delivers 1 193 - 1 367 lumens in emergency mode
- Operates 12 - 24 V DC
- CSA certified as a C22.2 C141-15 emergency lighting luminaire
- Meets ICES-005 requirements
- Ease of maintenance when used with Stanpro emergency lighting battery units complete with auto test function
- Complements Stanpro's normally ON LED vapor tight family

# VT4-L GEN2

## 4' LED VAPOR TIGHT

Optional Emergency Remote



### APPLICATIONS

- Parking garages
- Subways
- Schools
- Industrial facilities
- Exterior retail areas
- Storage rooms
- Garden centers
- Airports

### ORDERING GUIDE

VT4 — L — — — — —						
Series	Lamp type	Lumen package	CRI	Volts (V)	Color temp. (K)	Options
VT4	L - LED	S1B - Refer to the S2B - technical S3B - specification S4B - table for more details	80 - 80+ 90 <sup>7</sup> - 90+	A - 120 H - 347 W - 120-277	30K - 3 000 35K - 3 500 40K - 4 000 50K - 5 000	DIM1 <sup>1</sup> - 5 wire cable for AC and 0-10 V dimming DIM2 <sup>2</sup> - Line voltage dimming driver 120 V L6 - 6' white power cable length L10 - 10' white power cable length L6-BK - 6' black power cable length L10-BK - 10' black power cable length SS - Stainless steel latches (set of 10pcs) OS <sup>3</sup> - Occupancy sensor DL <sup>4,11</sup> - AC and Emergency backup (from 0°C - 25°C) 120 V, 120-277 V EL <sup>5,10</sup> - LINK Normally ON Emergency Remote TP <sup>6</sup> - Vandal Resistant Kit (includes 6pcs tamper proof screws) KV - 10kV Surge protector RMB-05 <sup>8</sup> - Rigid mono point on bracket with 3/4" center hole for 1/2 NPT conduit RMB-075 <sup>8</sup> - Rigid mono point on bracket with 1" center hole for 3/4 NPT conduit RMP-05 <sup>8,11</sup> - Rigid mono point on the luminaire with 3/4" center hole for 1/2 NPT conduit RMP-075 <sup>8,11</sup> - Rigid mono point on the luminaire with 1" center hole for 3/4 NPT conduit PVPM-05 <sup>9</sup> - Rigid mono point on pivot mount bracket with 3/4" center hole and 1/2 NPT PVPM-075 <sup>9</sup> - Rigid mono point on pivot mount bracket with 1" center hole and 3/4 NPT PVM <sup>8</sup> - Surface mount brackets with pivot (set of 2) EH - Additional 7/8" end hole with wet location gland CH - 7/8" center hole with wet location gland AC <sup>9</sup> - Aviation cable

<sup>1</sup> DIM1 option must select L6, L10, L6-BK or L10-BK. DL option is not compatible with DIM1.

<sup>2</sup> DIM2 only for S1B, S2B and S3B lumen packages

<sup>3</sup> To see available options, please consult the occupancy sensors section

<sup>4</sup> Fixture functional in AC mode, when power goes off emergency bodine (DL) powers LED boards. One bodine per fixture is standard unless otherwise specified

<sup>5</sup> Contact factory for availability

<sup>6</sup> 1 tamper proof bit (HAR06-TPBIT-UDR) included per order. Please consult the accessory table to order additional quantities

<sup>7</sup> 90 CRI option may decrease lumen output from 15% to 19% depending on the CCT

<sup>8</sup> See Mounting Options table

<sup>9</sup> Aviation cable length based on selected power cable length

<sup>10</sup> The LINK Emergency Power conversion module is compatible with all the following all configurations: LS1B, LS2B, LS3B, LS4B. Not compatible with the following options: DL, EH, OS (external), RMP-05, RMP-075. When in Emergency Mode, luminaire only consumes 11W

<sup>11</sup> When selecting DL, RMP-05 and RMP-075 options, the fixture maintains wet location status, however IP rating is no longer applicable

### DESCRIPTION

A vandal resistant luminaire with superior light distribution, the VT4-L is ideal for a variety of indoor/outdoor industrial, commercial and residential applications. Intended for environments where moisture and/or dust may be present.

### LINK TECHNICAL SPECIFICATIONS IN EMERGENCY MODE

- Consumes 11 W of DC power
- 200 mA constant current
- Delivers 1 218 - 1 409 lumens in emergency mode
- Operates 12 - 24 V DC
- CSA certified as a C22.2 C141-15 emergency lighting luminaire
- Meets ICES-005 requirements
- Ease of maintenance when used with Stanpro emergency lighting battery units complete with auto test function
- Complements Stanpro's normally ON LED vapor tight family





---

# DOWNLIGHT

# AR6

## ARCHITECTURAL 6" LED DOWNLIGHT

Optional Emergency Remote



### APPLICATIONS

- Offices
- Hotels
- Restaurants
- Grocery stores
- Retail stores
- High ceiling application
- Architectural applications

### DESCRIPTION

Our architectural 6 inch LED downlight is available for new construction non-IC and remodeler in all commercial lighting applications. This specification grade LED downlight offers high versatility, can reach up to 5 000 lumens and allows to choose the right amount of light required as well as the color temperature that will bring out the best in any space.

### LINK TECHNICAL SPECIFICATIONS IN EMERGENCY MODE

- Consumes 11 W of DC power
- 200 mA constant current
- Delivers 603 - 674 lumens in emergency mode
- Operates 12 - 24 V DC
- CSA certified as a C22.2 C141-15 emergency lighting luminaire
- Meets ICES-005 requirements
- Ease of maintenance when used with Stanpro emergency lighting battery units complete with auto test function
- Complements Stanpro's normally ON architectural 6" LED downlight family.

### ORDERING GUIDE - TRIMS

Series	Lumen package (lm) <sup>1</sup>	CRI <sup>2</sup>	Baffle finish	Lens finish	Color temp. (K) <sup>2</sup>	Beam angles
AR6	18 - 1 800 25 - 2 500 34 - 3 400 50 - 5 000	80 - 80+	HZ - Silver haze WH - Matte white BK - Matte black	C - Clear lens <sup>3</sup> F - Frosted lens <sup>4</sup>	30K - 3 000 35K - 3 500 40K - 4 000	S - Spot <sup>5</sup> N - Narrow flood F - Flood W - Wide

<sup>1</sup> Lumen packages based on photometry testing with frosted lens

<sup>2</sup> For more options, please consult factory.

<sup>3</sup> Lumen increase of 10% to be expected.

<sup>4</sup> F - Frosted lens is not available with the S - Spot beam angle.

<sup>5</sup> S - Spot beam angle is not available with lumen packages 50 - 5000.

### ORDERING GUIDE - HOUSINGS

Series	Lumen package (lm)	Volts (V)	Options
AR6	18 - 1 800	A - 120	EL - LINK Normally
AR6R	25 - 2 500	H - 347	ON emergency
	34 - 3 400		remote <sup>1</sup>
	50 - 5 000		

# CR6

## COMMERCIAL 6" LED DOWNLIGHT

Optional Emergency Remote



<sup>1</sup> Wet location when using frosted or clear lens

### APPLICATIONS

- Offices
- Hotels
- Restaurants
- Grocery stores
- Retail stores
- High ceiling application
- Commercial applications

### ORDERING GUIDE - TRIMS

Series	Lumen package (lm)	CRI	Reflector finish	Baffle finish	Flange finish	Color temp. (K)	Beam angles (°)	Options <sup>1</sup>
CR6	18 - 1 800 25 - 2 500 34 - 3 400 50 - 5 000	80 - 80+ 90 - 90+	C - Clear W - White	B - Black W - White O - No baffle	W - White B - Black	27 K - 2 700 30 K - 3 000 35 K - 3 500 40 K - 4 000	S - Spot (15) N - Narrow flood (24) F - Flood (38) W - Wide (60)	F - Frosted lens <sup>2</sup> L - Clear lens

<sup>1</sup> When selecting lens options F (frosted lens) or L (Clear lens), you must select a Baffle finish of B (Black) or W (White). The "No Baffle" option does not apply when a lens option is selected.

<sup>2</sup> Lumen loss of 15%-18% to be expected.

### ORDERING GUIDE - HOUSINGS

Series	Lumen package (lm) <sup>1</sup>	Voltage (V AC)	Option
CR6 - Non IC	18 - 1 800	A - 120	EL <sup>2</sup> - LINK Normally ON emergency remote
CR6R - Remodeler	25 - 2 500	H - 347	
	34 - 3 400		
	50 - 5 000		

<sup>1</sup> Please note that each housing and trim should correspond to a specific lumen package. For more information, please see Trims Ordering Guide above.

<sup>2</sup> When in emergency mode, luminaire only consumes 11 W.



### DESCRIPTION

Our commercial 6 inch LED downlight is available for Non-IC and remodeler construction and is suitable for all commercial lighting applications. The CR6 comes in a variety of lumen packages, colour temperatures and beam angles to suit your needs.

### LINK TECHNICAL SPECIFICATIONS IN EMERGENCY MODE

- Consumes 11 W of DC power
- 200 mA constant current
- Delivers 767 - 828 lumens in emergency mode
- Operates 12 - 24 V DC
- CSA certified as a C22.2 C141-15 emergency lighting luminaire
- Meets ICES-005 requirements
- Ease of maintenance when used with Stanpro emergency lighting battery units complete with auto test function
- Complements Stanpro's normally ON commercial 6" LED Downlight family.

# REC4-L

## 4" LED DOWNLIGHT

With Integrated COB and Driver  
Optional Emergency Remote



wet 1  
location



airtight



ICES  
005



<sup>1</sup> Only with REC407-L trim.



Integrated COB and driver



### DESCRIPTION

The 4" LED Downlight series is developed with an integrated COB and built in driver with a choice of two lumen options. This fixture is ideal for commercial and residential use, proposing a variety of trim selections and beam angles.

### LINK TECHNICAL SPECIFICATIONS IN EMERGENCY MODE

- Consumes 11 W of DC power
- 200 mA constant current
- Delivers 898 - 1 020 lumens in emergency mode
- Operates 12 - 24 V DC
- CSA certified as a C22.2 C141-15 emergency lighting luminaire
- Meets ICES-005 requirements
- Ease of maintenance when used with Stanpro emergency lighting battery units complete with auto test function
- Complements Stanpro's normally ON commercial 4" LED Downlight family.

### ORDERING GUIDE - HOUSINGS

Housing	Lumen package (lm)	Volts (V AC)	Options
REC4 - Non IC	LS2 - 1 152	A - 120 <sup>1</sup>	DIM1 - 0-10 V DC dimming
REC4R - Remodeler	LS3 - 1 593	E - 277 <sup>2</sup>	EL - LINK Normally ON emergency remote <sup>3,4</sup>
REC4IC - IC		H - 347 <sup>2</sup>	

<sup>1</sup> A - 120 V comes standard with line voltage dimming unless DIM1 is chosen.

<sup>2</sup> E - 277 V and H - 347 V come standard with DIM1 option.

<sup>3</sup> Not available with REC4 - Non IC, only available with REC4R - Remodeler and REC4IC - IC.

<sup>4</sup> When in emergency mode, luminaire only consumes 11 W.

### ORDERING GUIDE - TRIMS

Trims	Lumen package <sup>2</sup> (lm)	CRI	Finish	Color temp. (K)	Beam angles (°)
REC401	LS2 - 1 152	80 - 80+	CL-WH - Clear - White	27K - 2 700	S - Spot (19)
REC402	LS3 - 1 593	90 - 90+	BK - Black	30K - 3 000	M - Medium (24)
			BZ - Bronze	35K - 3 500 <sup>3</sup>	F - Flood (43)
			SC - Satin chrome	40K - 4 000	
			WH - White		
REC403			BK-SC - Black - Satin chrome		
			WH-WH - White - White		
REC407 <sup>1</sup>			SC - Satin chrome		
			WH - White		
REC408			WH - White		

<sup>1</sup> Wet location.

<sup>2</sup> Lumen is based on the medium beam angle at 3 000 K. Please refer to IES files or below lumen tables for more information.

<sup>3</sup> 3 500K is only available with 80+ CRI.



[illegible]





Printed in Canada.

© 2021 STANDARD Products Inc. All Rights Reserved.

Data is based upon tests performed in a controlled environment.

Actual performance can vary depending on operating conditions.

All products are subject to change or may be discontinued any time without notice.

For the latest version, please refer to our website.

[www.standardpro.com](http://www.standardpro.com)



**STANPRO**



standardpro.com

**STANPRO**