



EMERGENCY LIGHTING


SPACING GUIDELINE FOR REMOTE HEADS, BATTERY
UNITS AND COMBINATION SIGNS




STANPRO

EMERGENCY LIGHTING DESIGN SPACING GUIDELINES


Stanpro offers a large variety of remote heads lamps to suit every emergency lighting application.

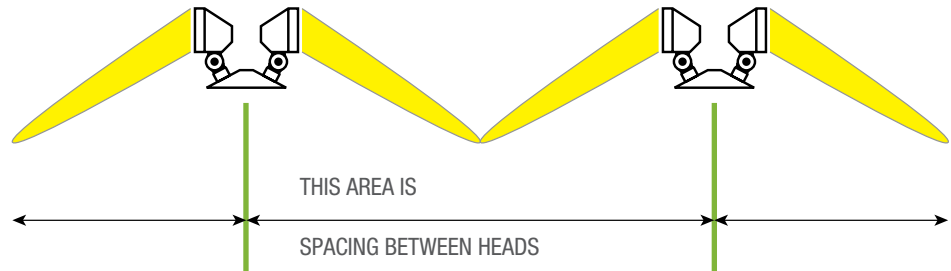


8FT MOUNTING HEIGHT

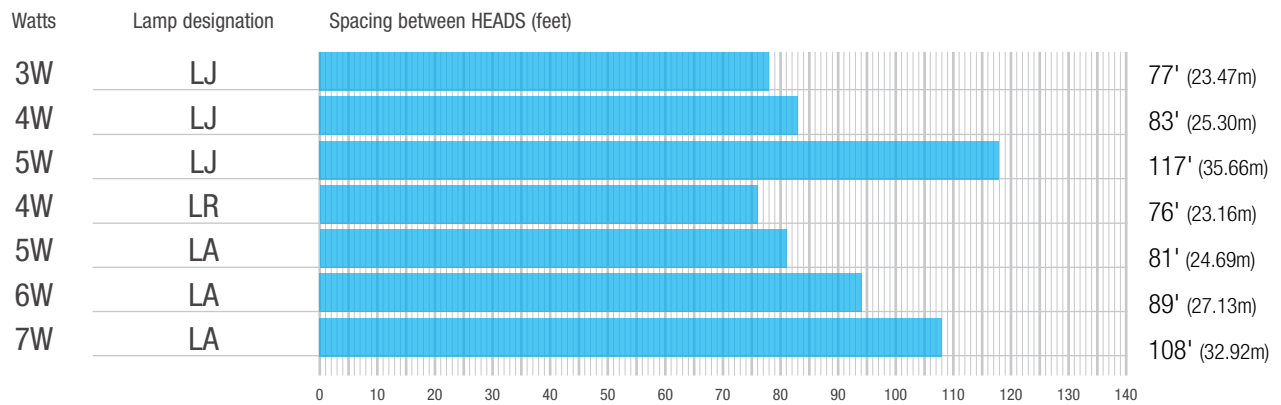


10FT MOUNTING HEIGHT

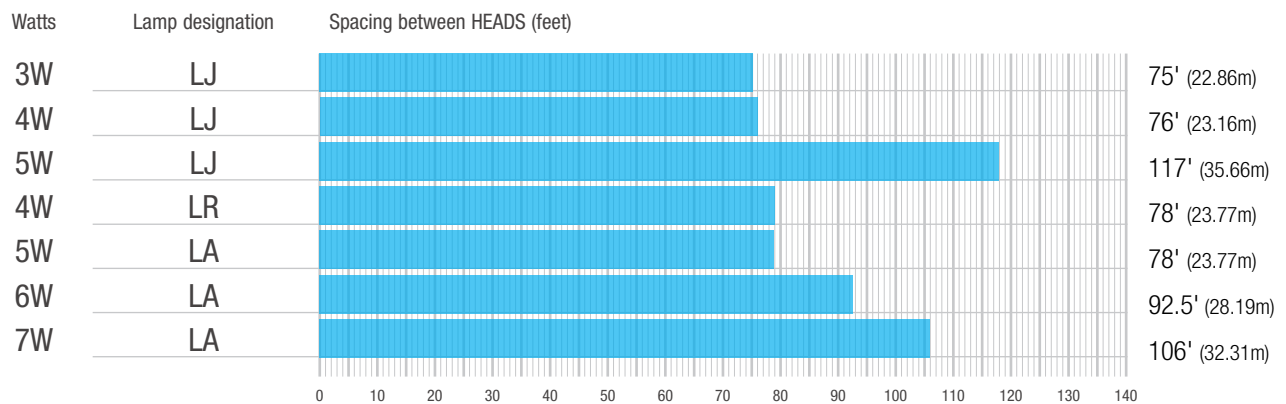

15FT MOUNTING HEIGHT

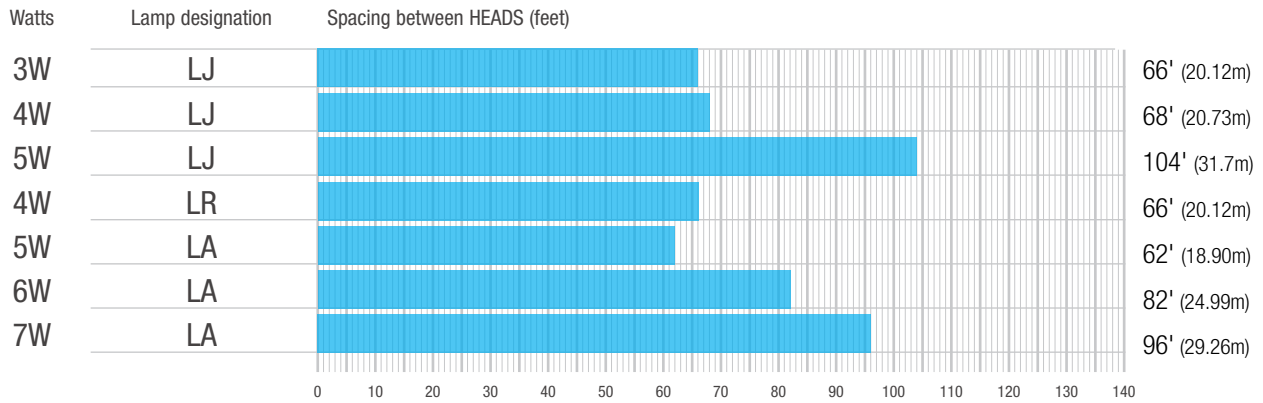

20FT MOUNTING HEIGHT

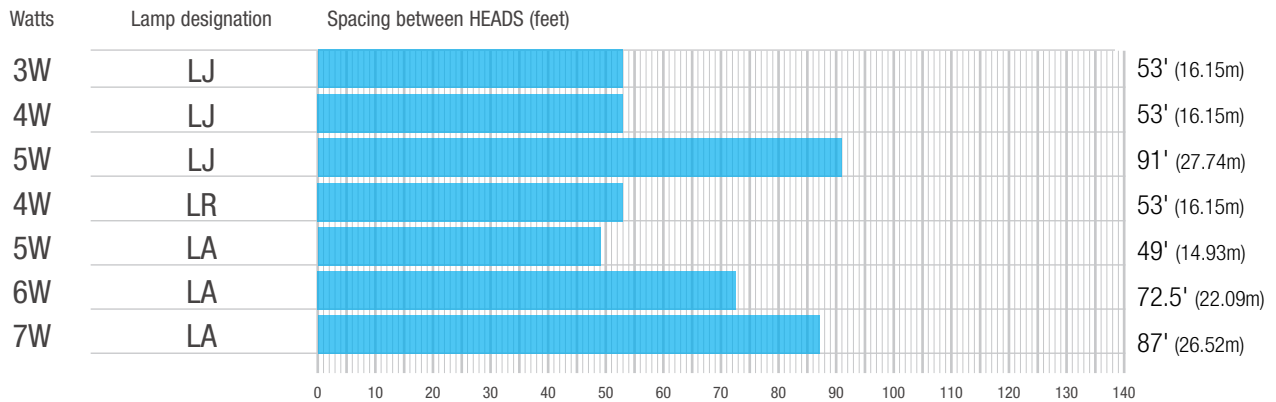

OUR NEW PAR18 3W LED REMOTE HEADS



N1-06-12V3WLJ

INCREDIBLE 39 FOOT SPACING AT 7 FOOT MOUNTING HEIGHT

N2-06-12V3WLJ

INCREDIBLE 78 FOOT SPACING AT 7 FOOT MOUNTING HEIGHT

**UNIVERSAL 6 TO 12VDC REMOTES.
NO MORE NEED TO CARRY 2 VOLTAGES
IN STOCK!**

- CRISP WHITE 3W LEDS
- LIMITED LIFETIME WARRANTY*

* FOR COMPLETE WARRANTY DETAILS, PLEASE SEE OUR TERMS AND CONDITIONS IN OUR WEBSITE.


SPACING

FOR LINK COMPATIBLE PRODUCTS

BASED ON 8', 10' OR 12' MOUNTING HEIGHTS IN EMERGENCY MODE.


INDOOR COMMODITY

CENTER BASKET

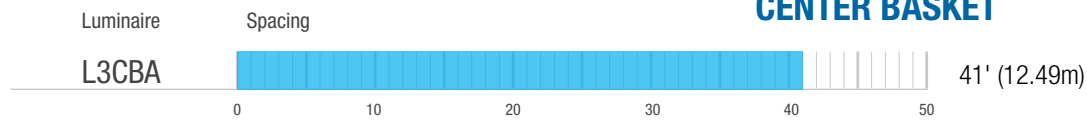


Average spacing for 1 out of every 4 luminaires, normally ON in the path of egress, when at 8, 10, or 12 foot mounting heights.

WRAPS




Average spacing for 1 out of every 4 luminaires, normally ON in the path of egress, when at 8, 10, or 12 foot mounting heights.

PANEL LIGHTS

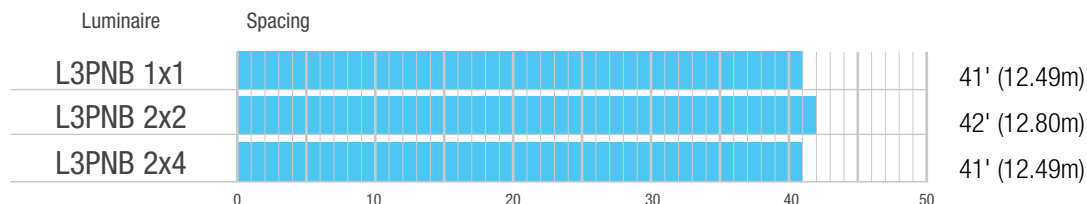


Average spacing for 1 out of every 4 luminaires, normally ON in the path of egress, when at 8, 10, or 12 foot mounting heights.

STRIP LIGHTS

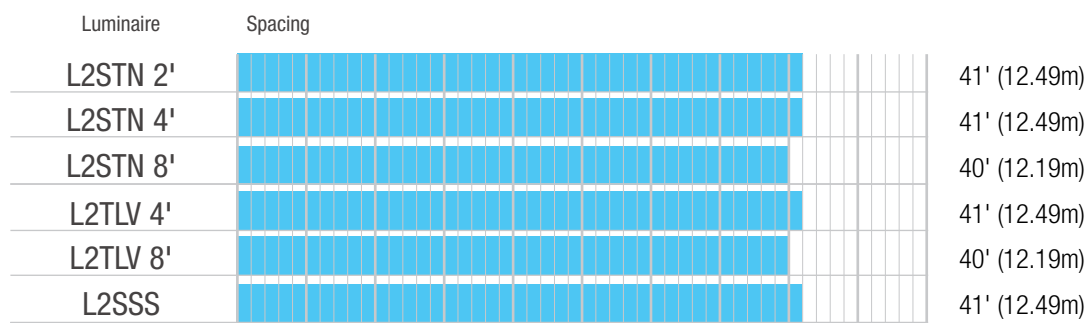


Average spacing for 1 out of every 4 luminaires, normally ON in the path of egress, when at 8, 10, or 12 foot mounting heights.

ARCHITECTURAL LINEAR

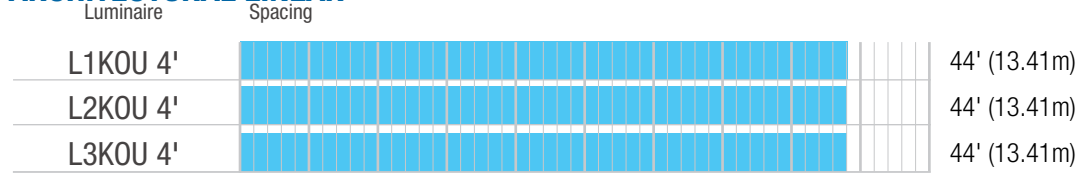


Average spacing for 1 out of every 4 luminaires, normally ON in the path of egress, when at 8, 10, or 12 foot mounting heights.

VAPOR TIGHTS

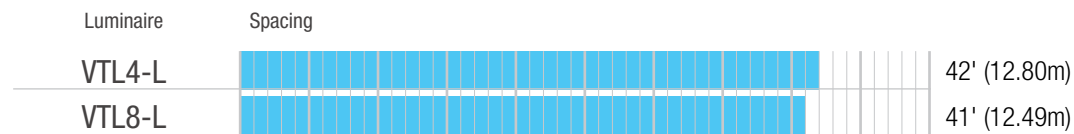


Average spacing for 1 out of every 4 luminaires, normally ON in the path of egress, when at 8, 10, or 12 foot mounting heights.

RECESSED ARCHITECTURAL LED DOWNLIGHT 6"




Average spacing for 1 out of every 3 luminaires, normally ON in the path of egress, when at 8, 10, or 12 foot mounting heights.

6" COMMERCIAL LED DOWNLIGHT



Average spacing for 1 out of every 3 luminaires, normally ON in the path of egress, when at 8, 10, or 12 foot mounting heights.

4" RECESSED LED

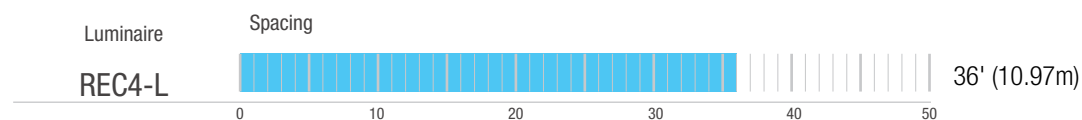

Average spacing for 1 out of every 3 luminaires, normally ON in the path of egress, when at 8, 10, or 12 foot mounting heights.

NOTES



STANPRO |



514.342.1199, 1.800.361.6965 •



514.807.3011 • www.standardpro.com

2233 rue de l'Aviation, Dorval, QC H9P 2X6