

## DSL-L GEN. 2 DUAL HEAD LED SECURITY LIGHT

The DSL-L GEN. 2 security light is CCT selectable with 3 color temperature options (3 000/4 000/5 000 K) to best suit all your commercial and residential application needs.

This dual head LED security light also features a built-in dusk to dawn sensor which allows to turn on the lights at dusk and turn off the light at dawn. For added safety, this generation includes the option of having the luminaire ON at all times and comes with a motion sensor.

Offering superior performance while improving on energy savings, this fixture is ideal for walkways, yards, driveways, patios, parking lots and loading docks.



### ■ Color Selectable

An all-in-one LED security light solution offering ultimate versatility, with the ability to change the color temperature (3 000/4 000/5 000 K) for a variety of projects and applications. An ideal solution for reducing stocking inventory.

### ■ Integrated Motion Sensor

The integrated motion sensor allows to set the lights to turn ON when motion is detected during daytime or night time adding extra security to outdoor spaces.


### ■ Dusk-to-Dawn and always ON mode Features

The dusk-to-dawn function allows for energy savings and the always ON mode increase security at night time.



## DSL-L GEN. 2 Dual Head LED Security Light




## Motion Sensor



Integrated Motion Sensor that is also angle adjustable.

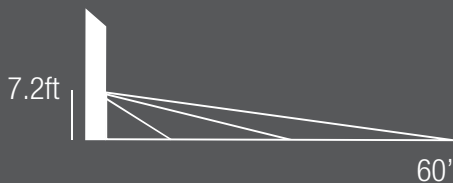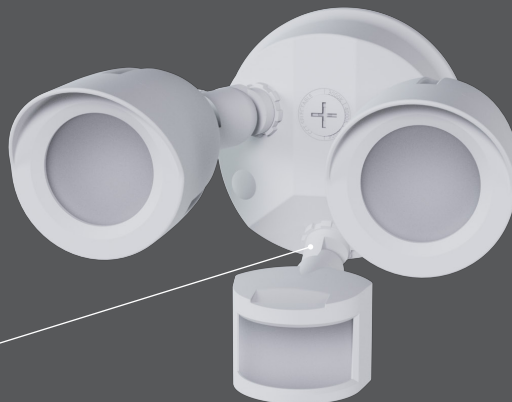

Mounting at 7.2 ft above the ground allows maximum range. If the sensor is mounted above this height, the usable range is reduced.

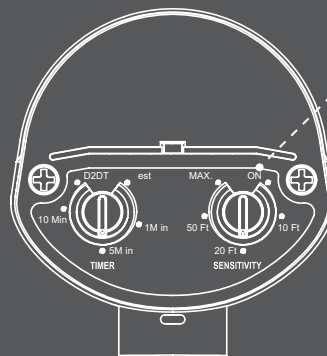

# Specification Table

Order code	Model number	Watts Volts		Color temp. (K) <sup>1</sup>	Lumen output (lm) <sup>2-3</sup>	Efficacy (lm/W)	CRI	Life L70 (hrs) <sup>4</sup>	Tested hours LM-80 (hrs) <sup>4</sup>	Calculated TM21 (hrs) <sup>4</sup>	Beam angle (°)	BUG	LED current (mA)	Finish	Dimming	Power factor	THD (%)	Traditional equivalent		Master case qty
		(W)	(VAC)															(W)	MH	

## CCT Selectable

69652	DSL-LS1B-A-3C-BR	20	120	3 000/4 000/5 000	1 974	86 - 99	80+	>100 000	10 000	>60 000	50	B2-U1-G0	0.18	Bronze	No	>0.9	<20	2x100	2x60-75	5
69653	DSL-LS1B-A-3C-WH	20	120	3 000/4 000/5 000	1 974	86 - 99	80+	>100 000	10 000	>60 000	50	B2-U1-G0	0.18	White	No	>0.9	<20	2x100	2x60-75	5

<sup>1</sup> Typical color temperature range: +/- 5 %.

<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

<sup>3</sup> Lumen values are based on 4 000 K default programming. Please refer to the LUMEN SPECIFICATION TABLE for more details on other color temperatures.

<sup>4</sup> Life hours are derived from IESNA LM-80-08 testing report and projected per IESNA TM-21-11 extrapolations.