

Project : _____ Type : _____
 Drawn by : _____ Catalogue # : _____ Date : _____

Individual Spec Sheet

5-KEY BATTERY-POWERED WALL SWITCH

FIELD INSTALLABLE

Integrated Bluetooth® Mesh Technology

ORDERING INFORMATION

Order code: 69736
Model number: CTRL-KBS5-002
UPC: 069549029576
DLC ID: N-HK2HBX

The 5 Key Battery Powered Wall Switch is a versatile, battery-powered Bluetooth® wireless wall switch that offers seamless control. It enables various features, including ON/OFF and dimming control, AUTO for automated control, and three customizable scene settings. Additionally, the wall switch can act like a remote controller, allowing you to operate your smart ecosystem from anywhere within its wireless range. Set up and re-program or re-group fixtures easily with our Genio app via a smart phone.

Features

- Bluetooth® 5.0 network technology enables the switch to be linked to one or more light groups via the Genio app
- Powered by two CR2032 batteries
- Approximately 5-8 year battery life*
- 3-scene scroll button
- Separate DIM, ON/OFF, AUTO buttons
- LED indicator will flash to show low battery life
- Can be wall-mounted or used as portable remote controller
- Easily retrofit existing wall switches with wall plates (not included)


TECHNICAL SPECS

Input voltage: 3 V DC
Color: White
Operating temperature: 0 °C to 30 °C (32 °F to 86 °F)
Storage temperature: -18 °C to 50 °C (-0.4 °F to 122 °F)
Housing material: UL 94-V0
Bluetooth® transmit: 100 ft Max
Radio frequency: 2.4 GHz ± 75 MHz
IP rating: IP20

ACCESSORIES (order separately)

Order code	Model number	Description
69739	CTRL-KBO-001	Wall plate for Bluetooth® Battery-Powered Wall Switch

DIMENSIONS¹

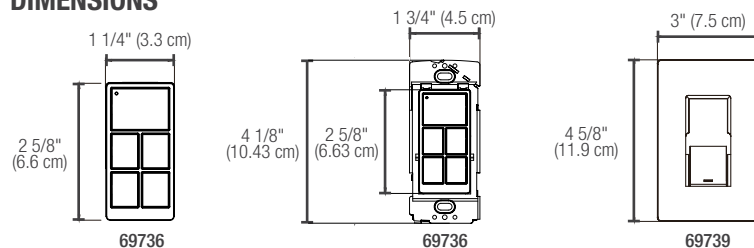

¹ For pairing instructions, [click here](#).

Qty	Description	Price

I accept the specifications of the accessory configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____



Wall-mounted
or portable remote controller



Wall Plate
(accessory not included)



indoor



GENIO CONTROL SYSTEM FEATURES

Genio is Stanpro's smart brand of lighting and emergency lighting. Integrating the latest in Bluetooth® Mesh technology, Genio products allow for customizable features that can be adjusted at your fingertips using a smartphone or other compatible devices. This system is easy to use, versatile and futureproof! Please see below for some of the key features¹ of the Genio control system:



LIGHTS

Instantly control the color temperature, wattage, lumen output and dimming.



GROUPS

Easily group luminaires together and control them as a single unit.



SCENES

Customize your lighting through scenes and create different atmospheres for occasions and activities.




SCHEDULES

Set schedules to specify dates, times and recurrence patterns for changing the settings of your lighting.



SENSOR

Adjust the integrated PIR motion sensor and daylight harvesting settings.

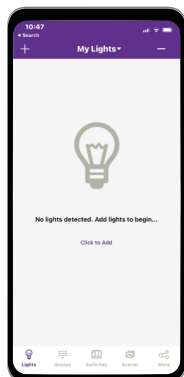


Lights

- Add
- Name or Rename
- Dimming and Color Tuning
- Delete
- Sensor Settings




Groups

- Create
- Rename
- Delete
- Add or Remove Lights
- Adjust Group Linkage Level
- Turn On/Off
- Adjust Group Dimming
- Activate Auto Mode

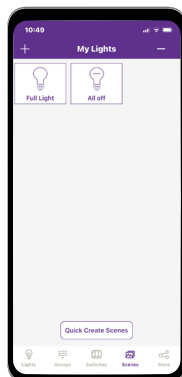

Scenes

- Create
- Edit
- Delete

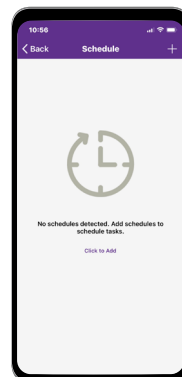

Schedules

- Creating
- Associate a Schedule To Lights, Groups, or Scenes
- Set a Repeating
- Set Fade Time
- Delete
- Enable Or Disable



Download on the
App Store



GET IT ON
Google Play



Download our App
Instruction Guide

¹ Please note that the features mentioned are part of a broader range of characteristics relating to the Genio Ecosystem and may not be applicable to this specific product. Customers are advised to review the product specifications carefully to understand their capabilities.

The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Ascot Capital Group is under license. Other trademarks and trade names are those of their respective owners.